
Open Hardware DSP Platform — www.ohdsp.org CoreOne — xCORE200 Platform Revision 2.1

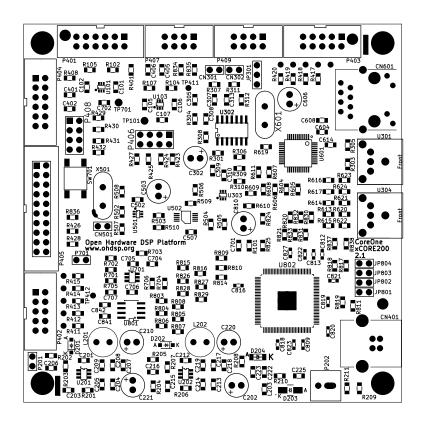

## Notes:

4 layer stackup: 1oz copper 0.2mm FR4 0.5oz copper 1mm to 1.2mm FR4 0.5oz copper 0.2mm FR4 1oz copper

eg Dirty PCB or JLCPCB JLC7628 Stackups

Use 26AWG ribbon cables to match PCB impedances (approx 89ohm)

Copyright Paul Janicki 2019

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.

Open Hardware DSP Platform - www.ohdsp.org

Sheet:

File: CoreOne-xCORE200-2.1.kicad\_pcb

Title: CoreOne - xCORE200 Platform

 Size: A4
 Date: 2019-04-04
 Rev: 2.1

 KiCad E.D.A. kicad (5.1.0)-1
 Id: 1/1

3