

NOTES:

1. MATERIAL:

HOUSING: HIGH THERMOPLASTIC RESIN, UL94V-0, COLOR: BLACK
 TERMINAL: COPPER ALLOY
 SHELL: STAINLESS

2. FINISH:

CONTACT AREA: GOLD PLATED
 CONTACT SOLDER AREA: GOLD FLASH
 SHELL: MATTE TIN PLATED
 UNDER NICKEL PLATED ALL OVER.

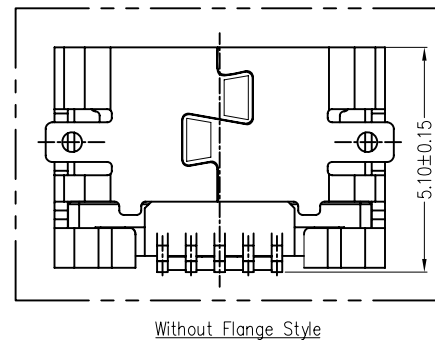
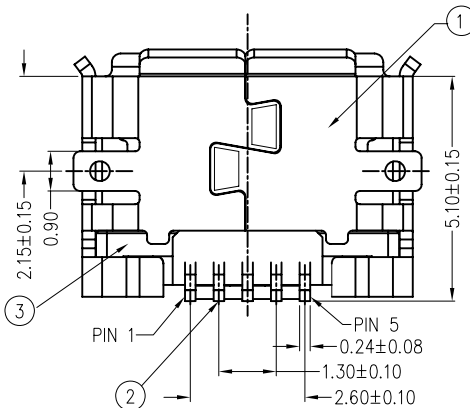
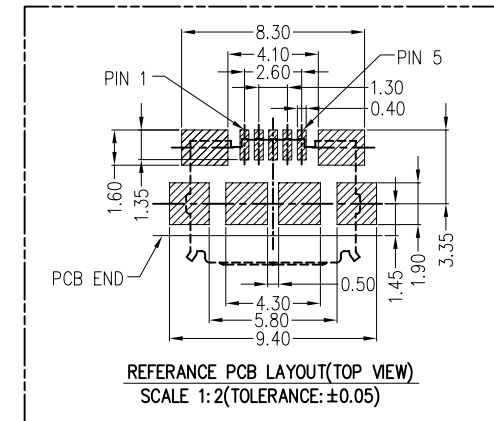
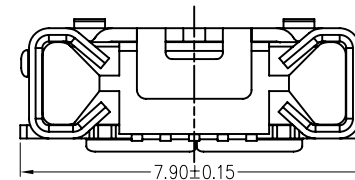
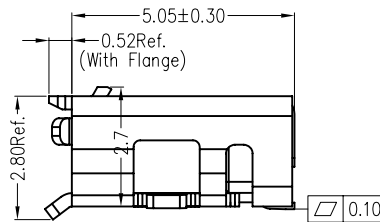
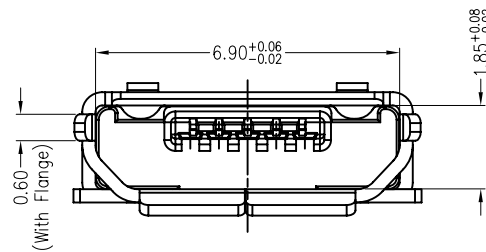
3. PRODUCT SPECIFICATION: GS-12-641.

4. PACKAGING SPECIFICATION: GS-14-2180.




5. THE "LF" MEANS FOR LEAD FREE AND CAN WITHSTAND EXPOSE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN IR REFLOW PROCESS.

6. PART NUMBER: 10118192-000 X LF

1- WHIT FLANGE
 2- WITHOUT FLANGE



Item	Title	Q'TY
1	Shell	1
2	Terminal	5
3	InsertMolding	1

mat'l. code				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family USB																			
ltr		ecn no		dr		date		tolerances unless otherwise specified										title											
A				LS		10/21/11		angles		.X±0.38				MICRO USB B TYPE RECEPTACLE															
B		ELX-N-20835		Nick		5/07/15		.XX±0.25																					
								X'±2"		.XXX±0.10		scale																	
				dr		JASON HSU		05/21/11				dwg no		sheet 1 of 1		size													
				enr		JASON HSU		05/21/11				10118192				A4													
				chr		JASON HSU		05/21/11																					
				appd		GARY HSIEH		05/21/11																					
sheet index		revision sheet		B		1																							