

# Call for Assistance Kit

## 6538-G5

### Overview

The EDWARDS 6538-G5 Call For Assistance Kit is designed for areas where a call-for-help or an emergency switch is required. The kit consists of a horn/strobe for audible and visual signaling, an emergency pull cord station, and a transformer.


### Standard Features

- All-in-one call for assistance package
- Uses single-gang boxes
- Easy to install
- Visual and audible signaling
- Resettable at the initiating station

### Application


Use the Call for Assistance Kit in health care facilities, public rest rooms, and handicapped areas.

### Wiring

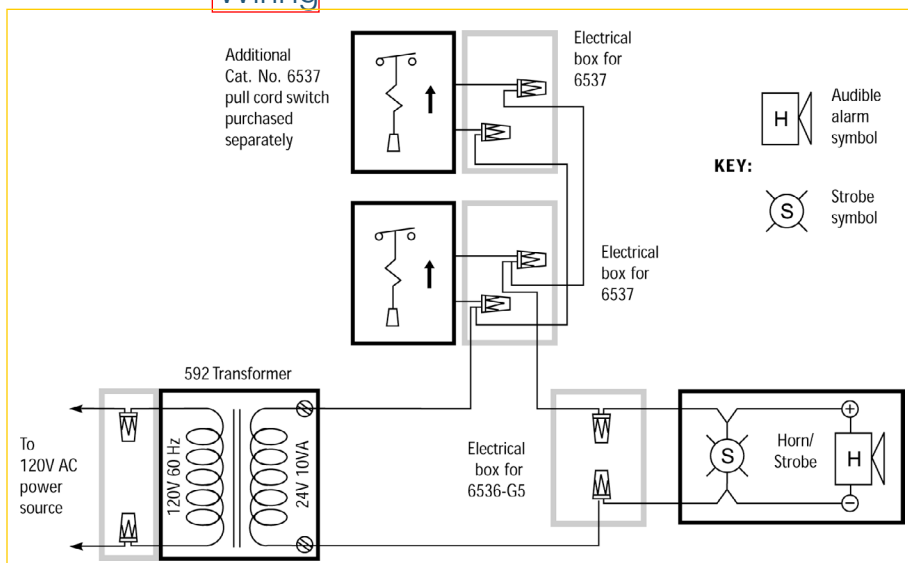


## Specifications


Horn/Strobe	
Sound output	82 dBA at 10 ft. (3.05 m)
Strobe output	11.7 cd
Electrical rating	24 V 50/60 Hz or 24 Vdc
Current draw	175 mA @ 24 V 50/60 Hz; 125 mA @ 24 Vdc
Mounting	Single-gang 2" x 4" (51 mm x 102 mm) electrical box
Color	Neutral beige
Agency Listing	UL

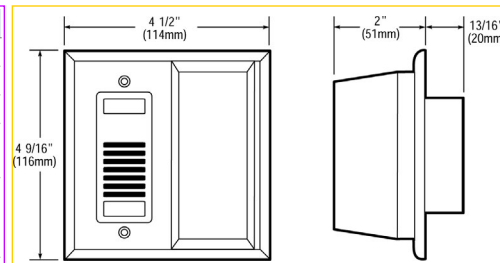

Pull Cord Station	
Electrical rating	3 amps @ 125 Vac; 0.5 amps @ 125 Vdc
Mounting	Flush or surface
Faceplate	Stainless steel
Contacts	Double poll single throw



Transformer	
Input voltage	120 Vac
Output voltage	24 Vdc
Mounting	Mount in a standard 1/2" (13 mm) knockout or surface mount using the provided foot mounts. Also suitable for mounting in both plastic and metal backboxes.
Wiring connections	Pre-stripped pigtails
Overload protection	Thermal non-regenerative
Agency listings	UL, CSA

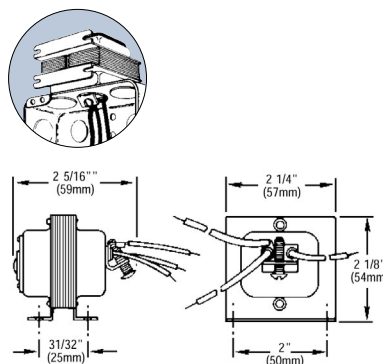

## Ordering Information

Catalog Number	Description	Ship Wt.
6538-G5	Call for Assistance Kit	2 lbs. (0.9 kg.)