

# Battery Distribution Unit

## 3-BTSEN

### Overview

The 3-BTSEN consists of a circuit breaker and copper bus bars mounted on a sheet metal bracket. The unit provides a backup battery bus for supplying backup power to multiple power supplies fed by a common battery. The 3-BTSEN features a 50 Amp circuit breaker to protect the backup battery. The 3-BTSEN mounts in the BC-1 Battery cabinet or any EST3 "RCC" series enclosure.

### Standard Features

- 50 Amp circuit breaker
- 24 Vdc power distribution bus


### Application

The 3-BTSEN is designed to protect and distribute standby 24 Vdc from a large common battery to multiple power supplies in an EST3 cabinet.


### Engineering Specification

Where a remote battery cabinet is required to house large standby batteries for the fire alarm system cabinet, the remote battery cabinet shall be equipped with a circuit breaker and distribution bus.

### Mounting

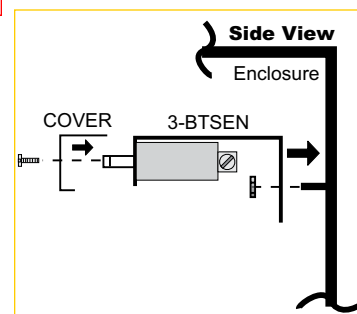

# Typical Wiring

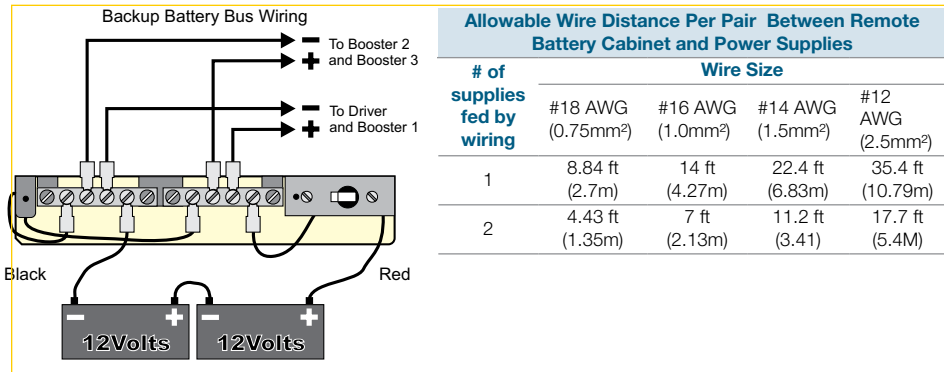

# Specifications

Agency Listings	UL, ULC, EN 54-2: 1997 + A1: 2006, EN 54-4: 1997 + A1: 2002 + A2: 2006, and EN 54-16: 2008
Mounting	BC-1 or "RCC Series" enclosures
Power Rating	50 Amps @ 24 Vdc
Power Bus Connections	#10-32 machine screws
Operating Environment	32°F (0°C) to 120°F (49°C), 93% RH, non-condensing

# Ordering Information

Catalog Number	Description	Shipping Wt., lb (kg)
3-BTSEN	Battery Distribution Bus	1 (.45)
3-BTSEN-E*	Remote battery cabinet interlace, temperature sensing	1 (.45)

\* EN 54-2: 1997 + A1: 2006, EN 54-4: 1997 + A1: 2002 + A2: 2006, and EN 54-16: 2008