

TUMBLE DRYERS



DX
RANGE

DX 13

13KG
30LB

DX 24

24KG
55LB



PLATFORM: XCONTROL FLEX / XCONTROL FLEX PLUS


- Available with XControl FLEX touch control for Vend
- 7" (5" on stack tumbler dryers), full color, touch screen display
- Clear step-by-step instructions available for easier operation
- Machine programming & performance data accessible through cloud. Remotely access to live machine data on mobile device
- VEND:
 - » 5 standard dry programmes (High, Medium, Low, Delicate, No Heat)
 - » 11 easy-to-use cycle modifier
- Count up timer
- Over-the-air updates

FEATURES

- Electrical and Gas heating
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Axial airflow
 - » Drum perforations only at the front and back
 - » Maximum airflow, less energy consumption and short drying times
- Reversing drum: prevents linen from tangling
- Stainless steel drum
- Grey painted side panels
- Coin operated version
- SafeTech™ Fire Suppression System as an option
 - » Prevents early laundry fire by constantly monitoring the temperature in the drum
 - » In case of excessive temperature, linen is sprayed with water

TYPE		DX13	DX24
CAPACITY			
Drum capacity 1:18	kg/lb	15/33	27/59
Drum volume	l	270	490
Drum diameter	mm	Ø 673	Ø 838
AIRFLOW			
Airflow	l/s	240	330
DRYING AVERAGE			
Gas heating	g/min	267	485
Electric heating	g/min	258	371
MOTOR			
Fan	kW	0,4	0,4
Drive	kW	0,2	0,4
GAS HEATING			
Energy	kW	21,4	32,8
Energy	kBTU/h	73	112
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Gas connection	NPT	½"	½"
ELECTRICAL HEATING			
Energy	kW	21	27
Electrical connection		3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, x 460-480V/50-60Hz	
EXHAUST	Ø /mm	150	200
DIMENSIONS			
Size H×W×D	mm	1625×710×1155	1700×875×1350
Net weight (E)	kg	150	200
Net weight (G,S)	kg	145	195
TRANSPORT DATA			
Packed (foil) H×W×D	mm	1720×760×1240	1790×900×1450
Gross weight (foil, E)	kg	160	220
Gross weight (foil,G,S)	kg	155	215
Packed (crate) H×W×D	mm	2210×880×1320	2210×1020×1520
Gross weight (crate, E)	kg	220	300
Gross weight (crate,G,S)	kg	214	295

Side DX 13 24

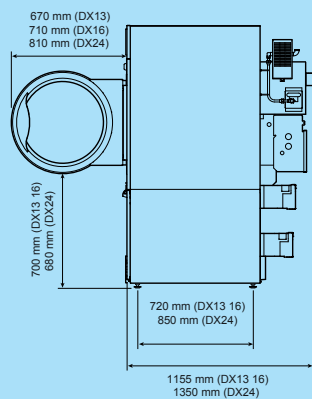

Back DX 13 24

