

TMTF | Two-interval (2AFC, Won 2011 / Park 2015 settings) | records 2026-10-11 to 2026-11-03

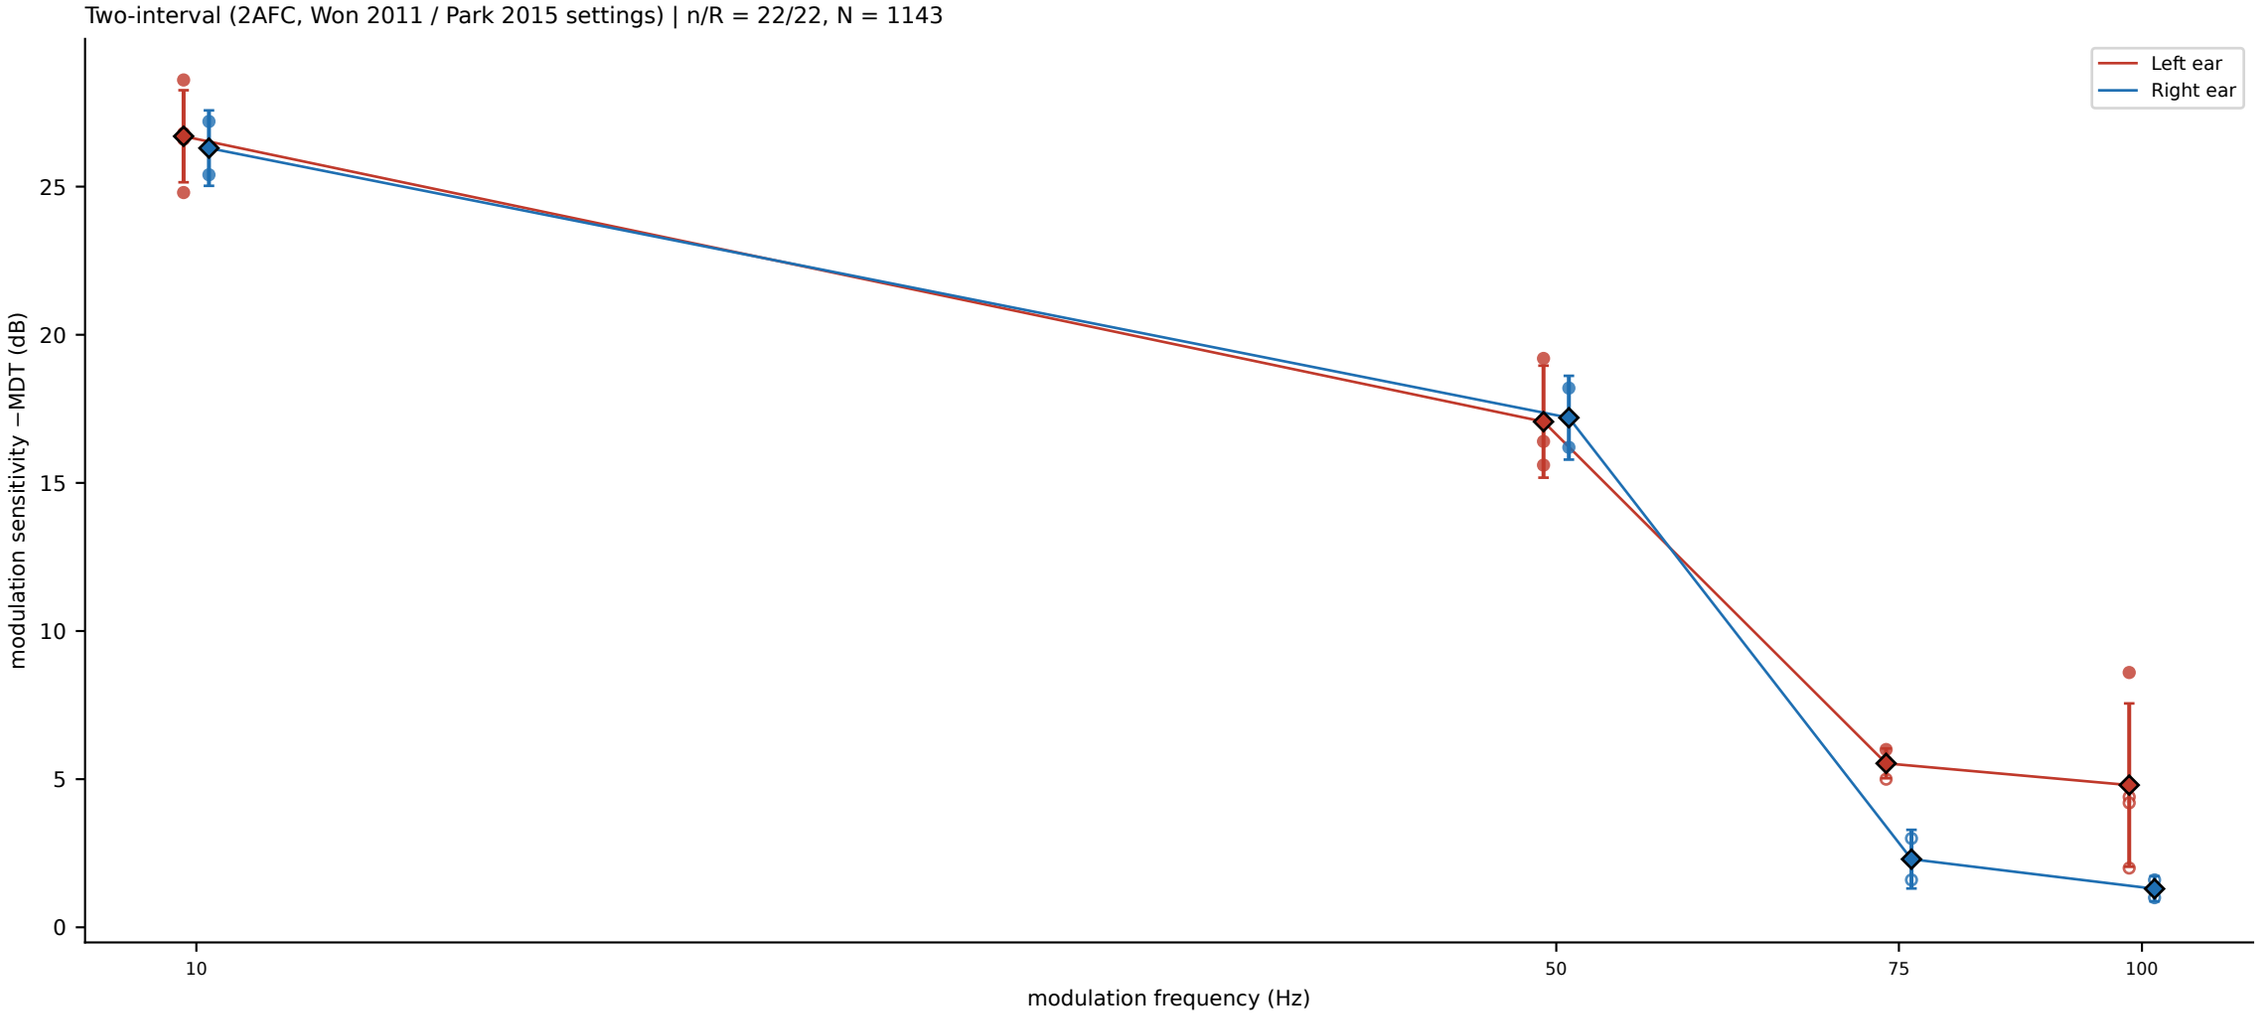

ear	fm(Hz)	mean	SD	n/R	N
L	10	26.70	1.55	4/4	230
L	50	17.07	1.89	3/3	140
L	75	5.53	0.50†	3/3	133
L	100	4.80	2.76†	4/4	208
R	10	26.30	1.27	2/2	106
R	50	17.20	1.41	2/2	106
R	75	2.30	0.99†	2/2	129
R	100	1.30	0.42†	2/2	91

Dots: numeric run thresholds (sign flipped: −MDT). x: unmeasurable runs (4 cumulative errors at 0 dB), drawn at the bottom, not a threshold.
Diamonds: mean ± sample SD of numeric runs. Open dots / †: app flag at_chance. n numeric thresholds, R retained runs, N response trials. Ticks without labels: see the table.


TMTF | Three-interval bandpass (3AFC, De Ruiter 2015 settings) | records 2026-10-11 to 2026-11-03

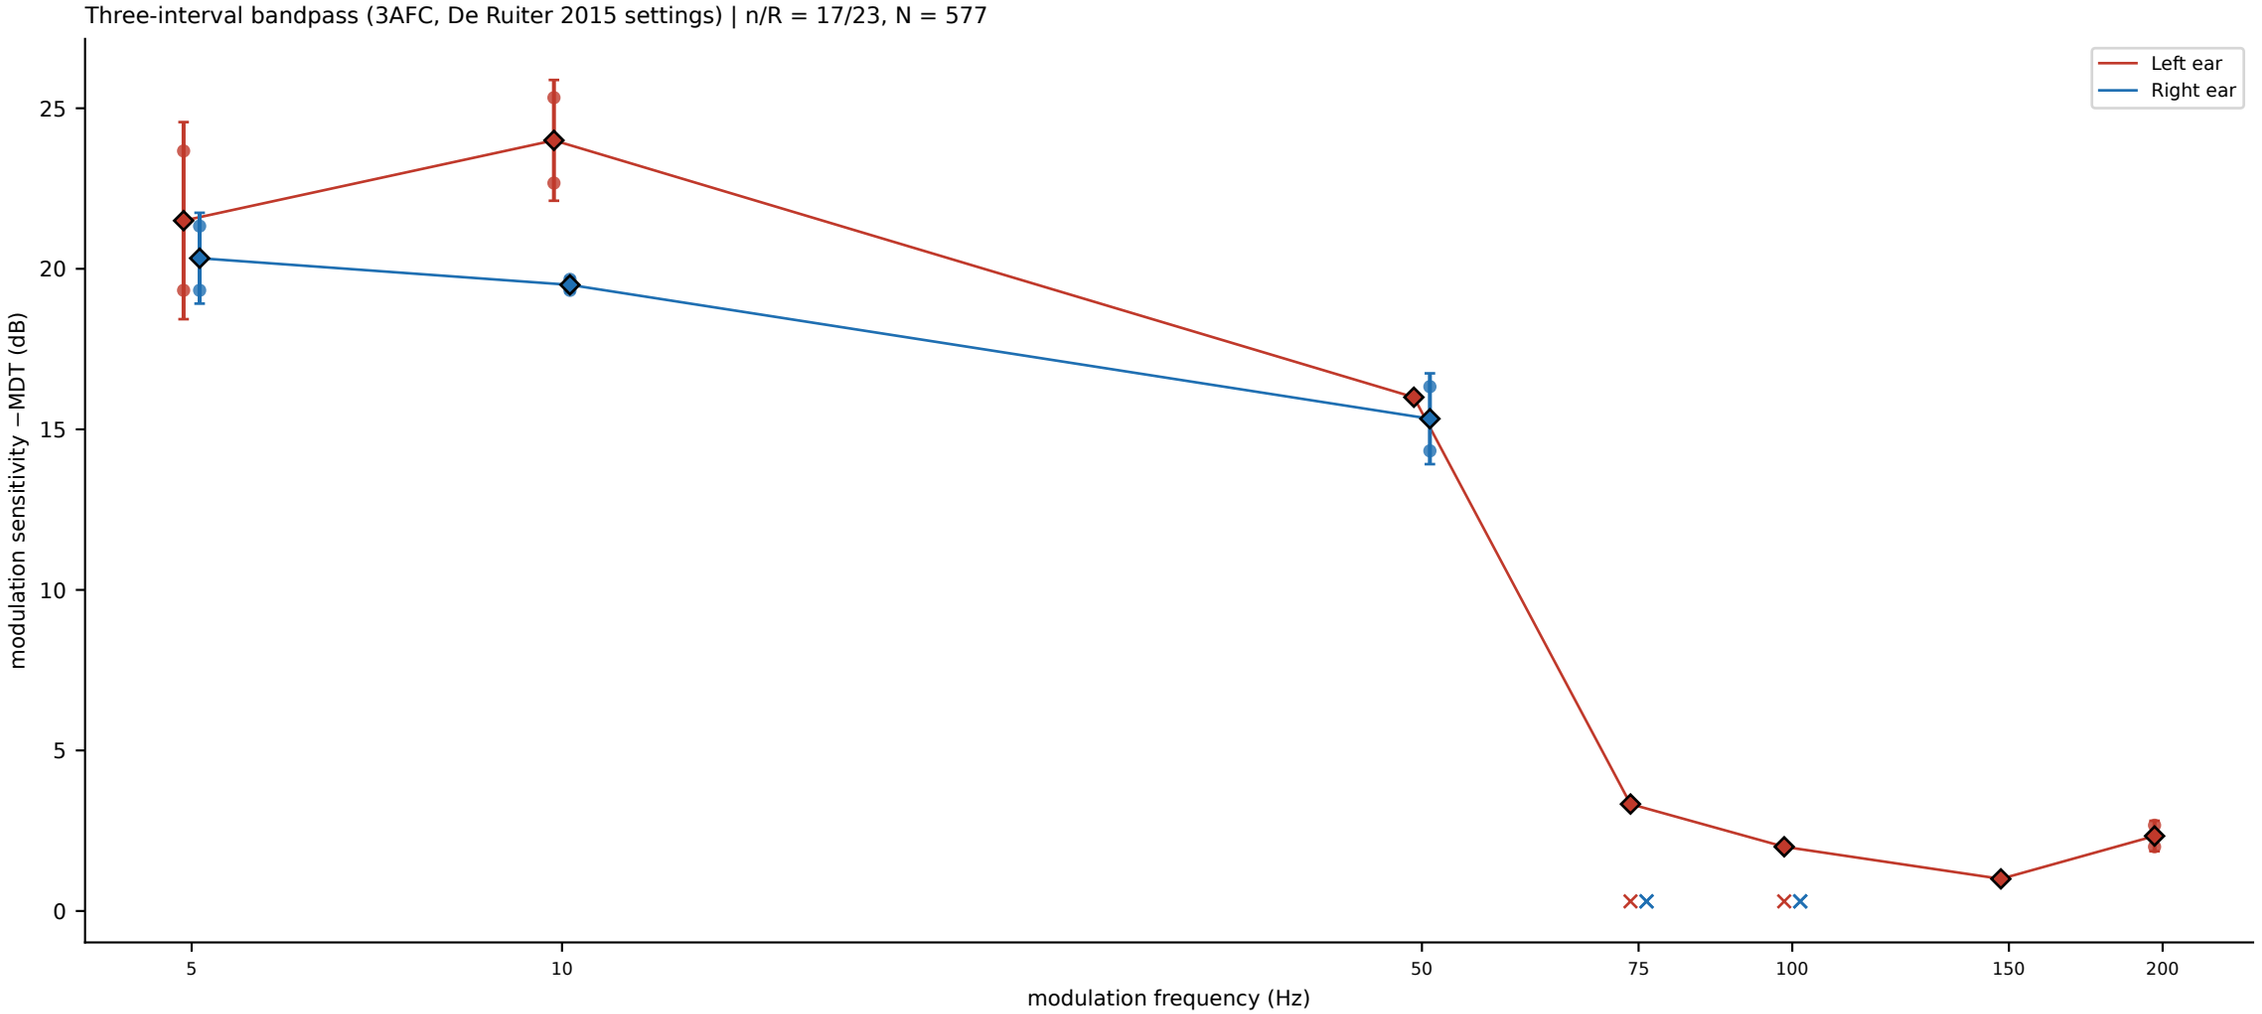

ear	fm(Hz)	mean	SD	n/R	N
L	5	21.50	3.07	2/2	63
L	10	24.00	1.88	2/2	69
L	50	16.00	0.00	2/2	52
L	75	3.33	–	1/2	53
L	100	2.00	–	1/2	31
L	150	1.00	–	1/1	23
L	200	2.33	0.47	2/2	48
R	5	20.33	1.41	2/2	66
R	10	19.50	0.24	2/2	63
R	50	15.33	1.41	2/2	59
R	75	–	–	0/2	23
R	100	–	–	0/2	27

Dots: numeric run thresholds (sign flipped: −MDT). x: unmeasurable runs (4 cumulative errors at 0 dB), drawn at the bottom, not a threshold.
Diamonds: mean ± sample SD of numeric runs. Open dots / †: app flag at_chance. n numeric thresholds, R retained runs, N response trials. Ticks without labels: see the table.


TMTF | Custom settings (3AFC, broadband, random AM phase) | records 2026-10-11 to 2026-11-03

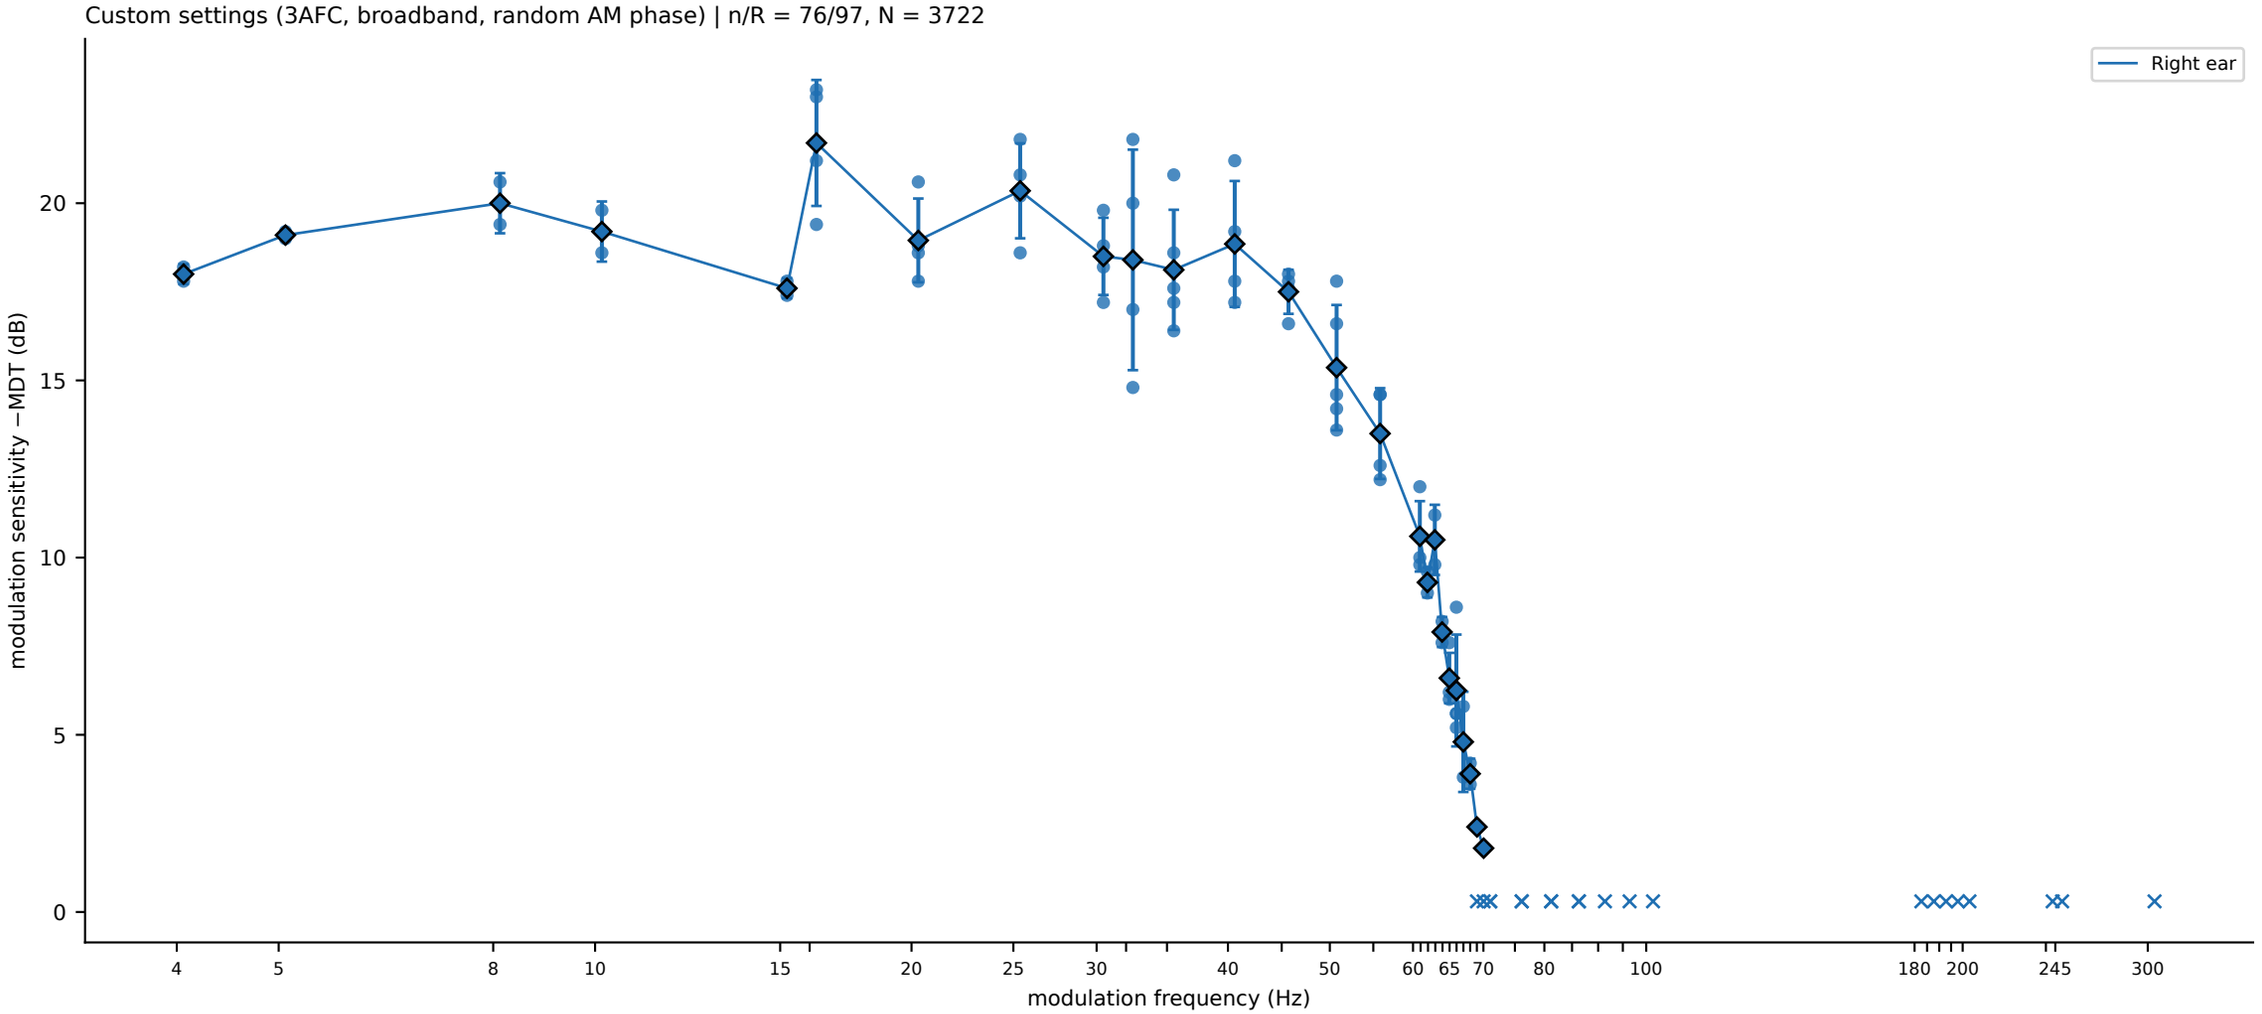

ear	fm(Hz)	mean	SD	n/R	N
R	4	18.00	0.28	2/2	81
R	5	19.10	0.14	2/2	88
R	8	20.00	0.85	2/2	110
R	10	19.20	0.85	2/2	104
R	15	17.60	0.28	2/2	92
R	16	21.70	1.78	4/4	167
R	20	18.95	1.18	4/4	203
R	25	20.35	1.34	4/4	189
R	30	18.50	1.09	4/4	188
R	32	18.40	3.11	4/4	183
R	35	18.12	1.69	5/5	242
R	40	18.85	1.78	4/4	227
R	45	17.50	0.62	4/4	193
R	50	15.36	1.77	5/5	220
R	55	13.50	1.28	4/4	195
R	60	10.60	0.99	4/4	184
R	61	9.30	0.42	2/2	88
R	62	10.50	0.99	2/2	85
R	63	7.90	0.42	2/2	82
R	64	6.60	0.71	4/4	151
R	65	6.25	1.58†	4/4	164
R	66	4.80	1.41	2/2	85
R	67	3.90	0.42	2/2	77
R	68	2.40	–	1/2	57
R	69	1.80	–	1/2	51
R	70	–	–	0/2	15
R	75	–	–	0/2	10
R	80	–	–	0/2	11
R	85	–	–	0/2	50
R	90	–	–	0/1	13
R	95	–	–	0/1	17
R	100	–	–	0/1	26
R	180	–	–	0/1	4
R	185	–	–	0/1	5
R	190	–	–	0/1	15
R	195	–	–	0/1	16
R	200	–	–	0/1	20
R	240	–	–	0/1	4
R	245	–	–	0/1	4
R	300	–	–	0/1	6


Dots: numeric run thresholds (sign flipped: −MDT). x: unmeasurable runs (4 cumulative errors at 0 dB), drawn at the bottom, not a threshold.
Diamonds: mean ± sample SD of numeric runs. Open dots / †: app flag at_chance. n numeric thresholds, R retained runs, N response trials. Ticks without labels: see the table.

TMTF | Custom settings, 55-70 Hz detail | records 2026-10-11 to 2026-11-03

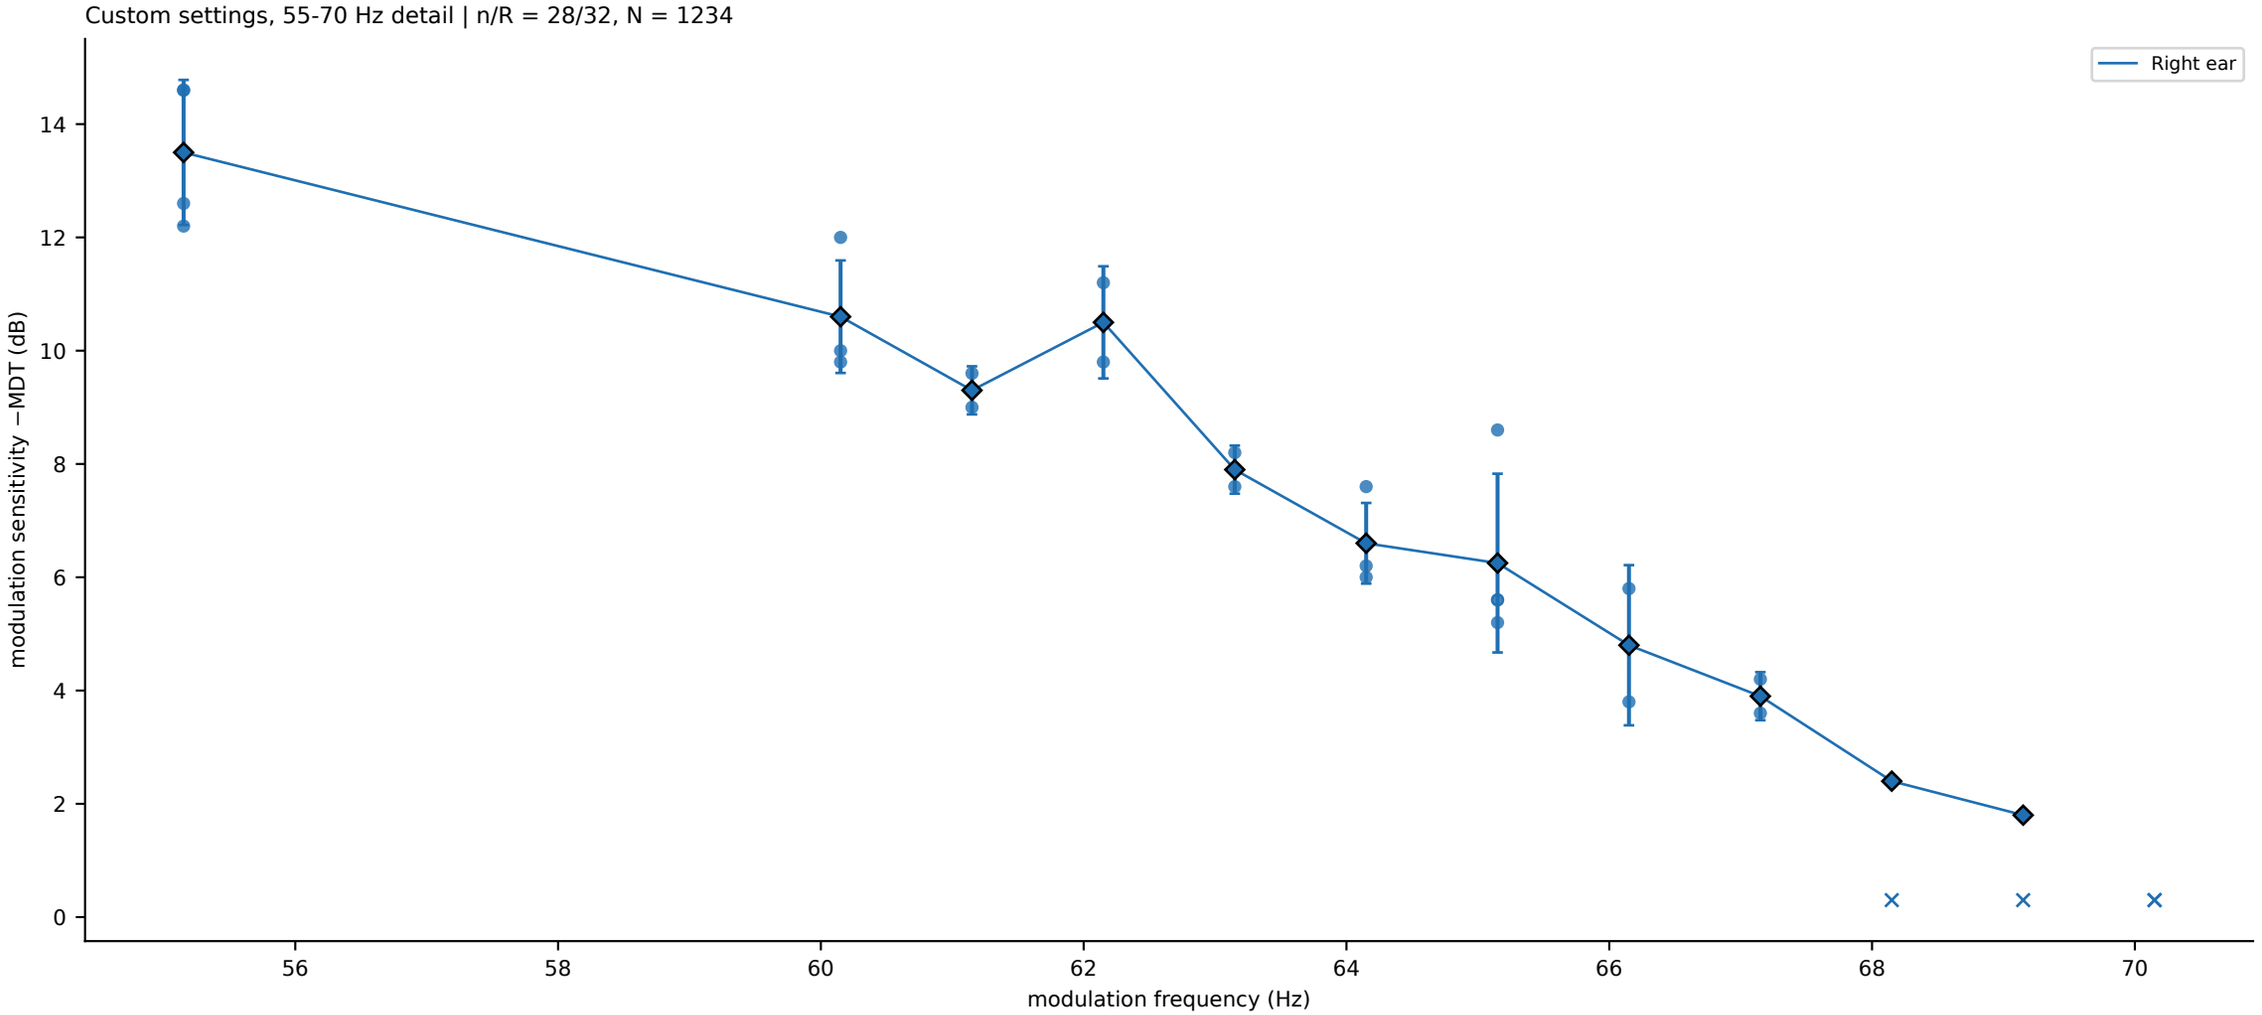


ear	fm(Hz)	mean	SD	n/R	N
R	55	13.50	1.28	4/4	195
R	60	10.60	0.99	4/4	184
R	61	9.30	0.42	2/2	88
R	62	10.50	0.99	2/2	85
R	63	7.90	0.42	2/2	82
R	64	6.60	0.71	4/4	151
R	65	6.25	1.58†	4/4	164
R	66	4.80	1.41	2/2	85
R	67	3.90	0.42	2/2	77
R	68	2.40	–	1/2	57
R	69	1.80	–	1/2	51
R	70	–	–	0/2	15

Dots: numeric run thresholds (sign flipped: −MDT). x: unmeasurable runs (4 cumulative errors at 0 dB), drawn at the bottom, not a threshold.
Diamonds: mean ± sample SD of numeric runs. Open dots / †: app flag at_chance. n numeric thresholds, R retained runs, N response trials. Ticks without labels: see the table.

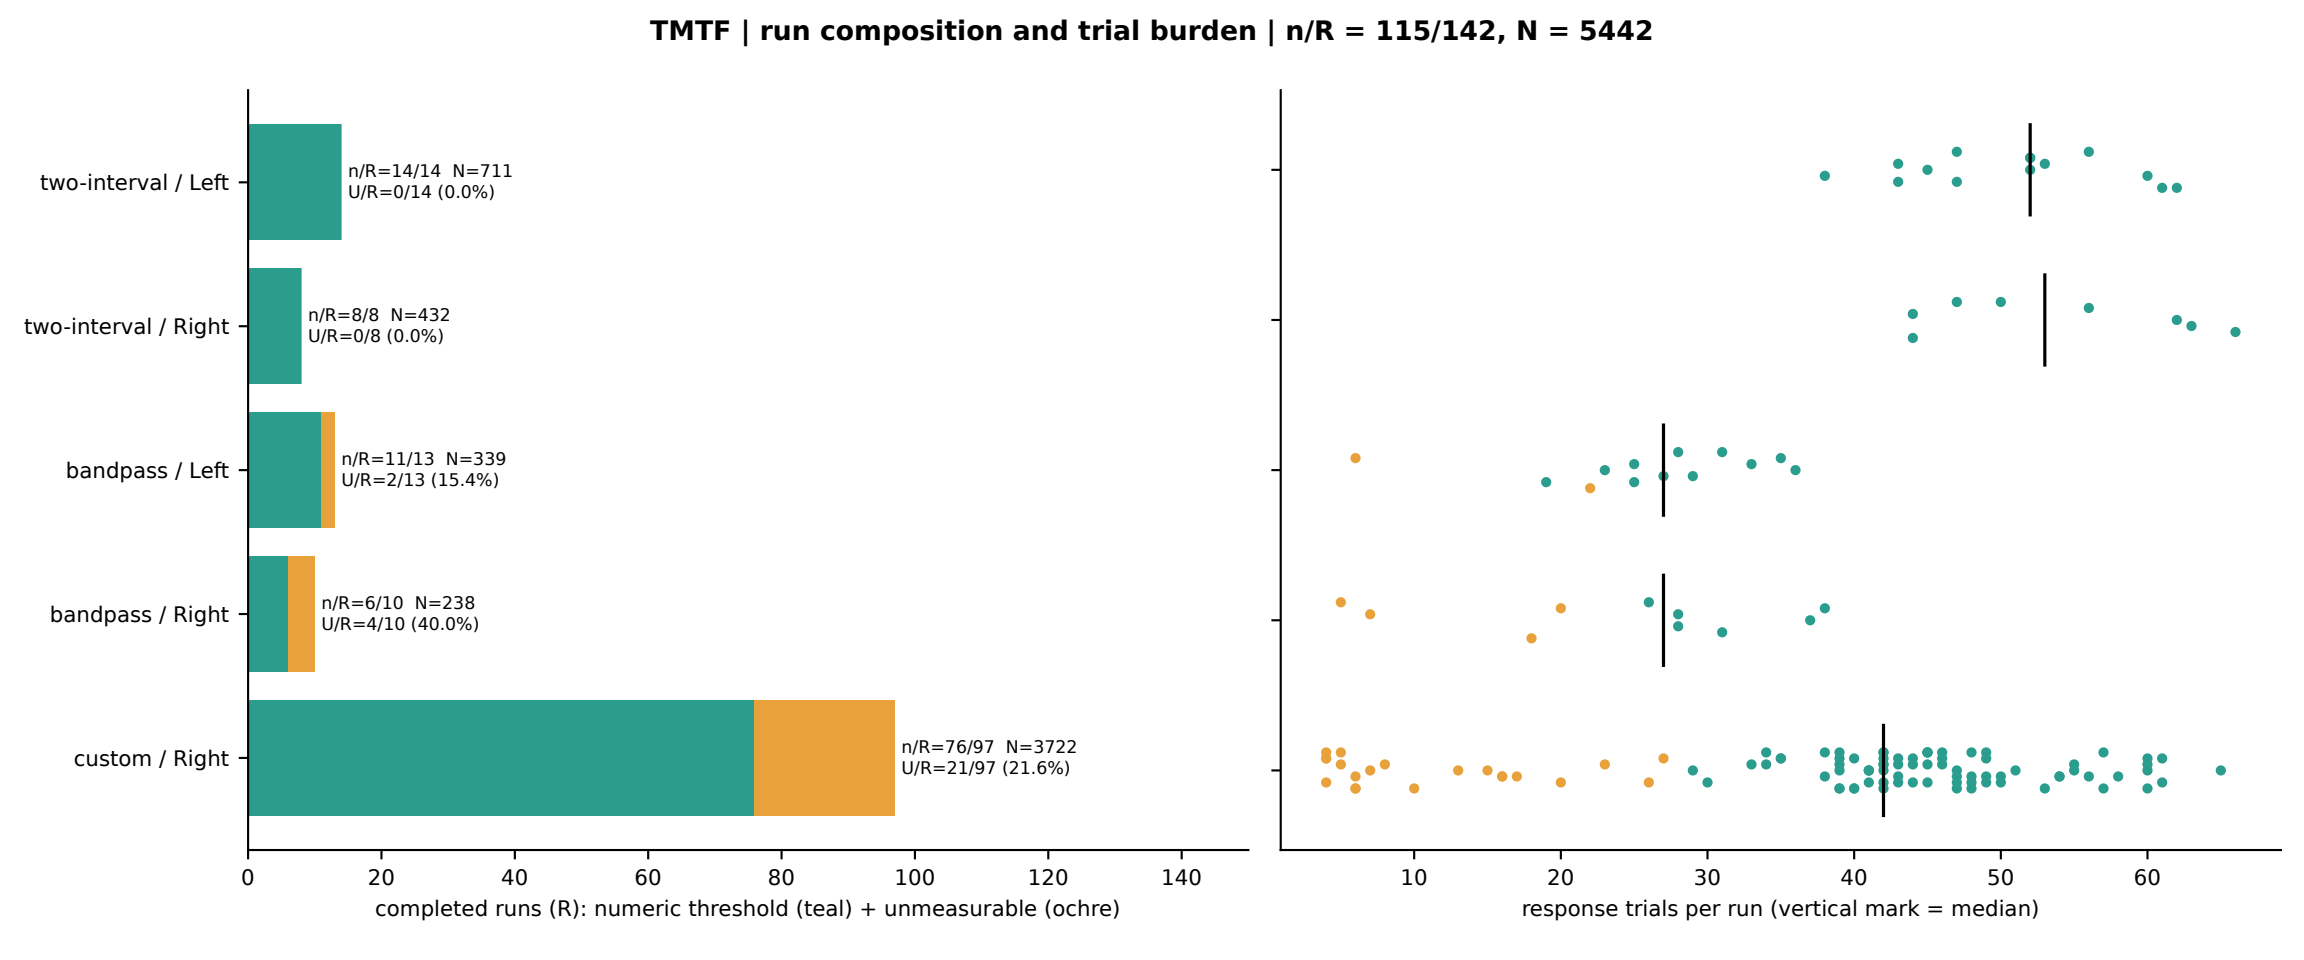
TMTF | run composition and trial burden | n/R = 115/142, N = 5442
two-interval / Left
n/R=14/14 N=711
U/R=0/14 (0.0%)
two-interval / Right
n/R=8/8 N=432
U/R=0/8 (0.0%)
bandpass / Left
n/R=11/13 N=339
U/R=2/13 (15.4%)
bandpass / Right
n/R=6/10 N=238
U/R=4/10 (40.0%)
custom / Right
n/R=76/97 N=3722
U/R=21/97 (21.6%)
0
20
40
60
80
100
120
140
completed runs (R): numeric threshold (teal) + unmeasurable (ochre)
10
20
30
40
50
60
response trials per run (vertical mark = median)

TMTF | recorded adaptive staircases

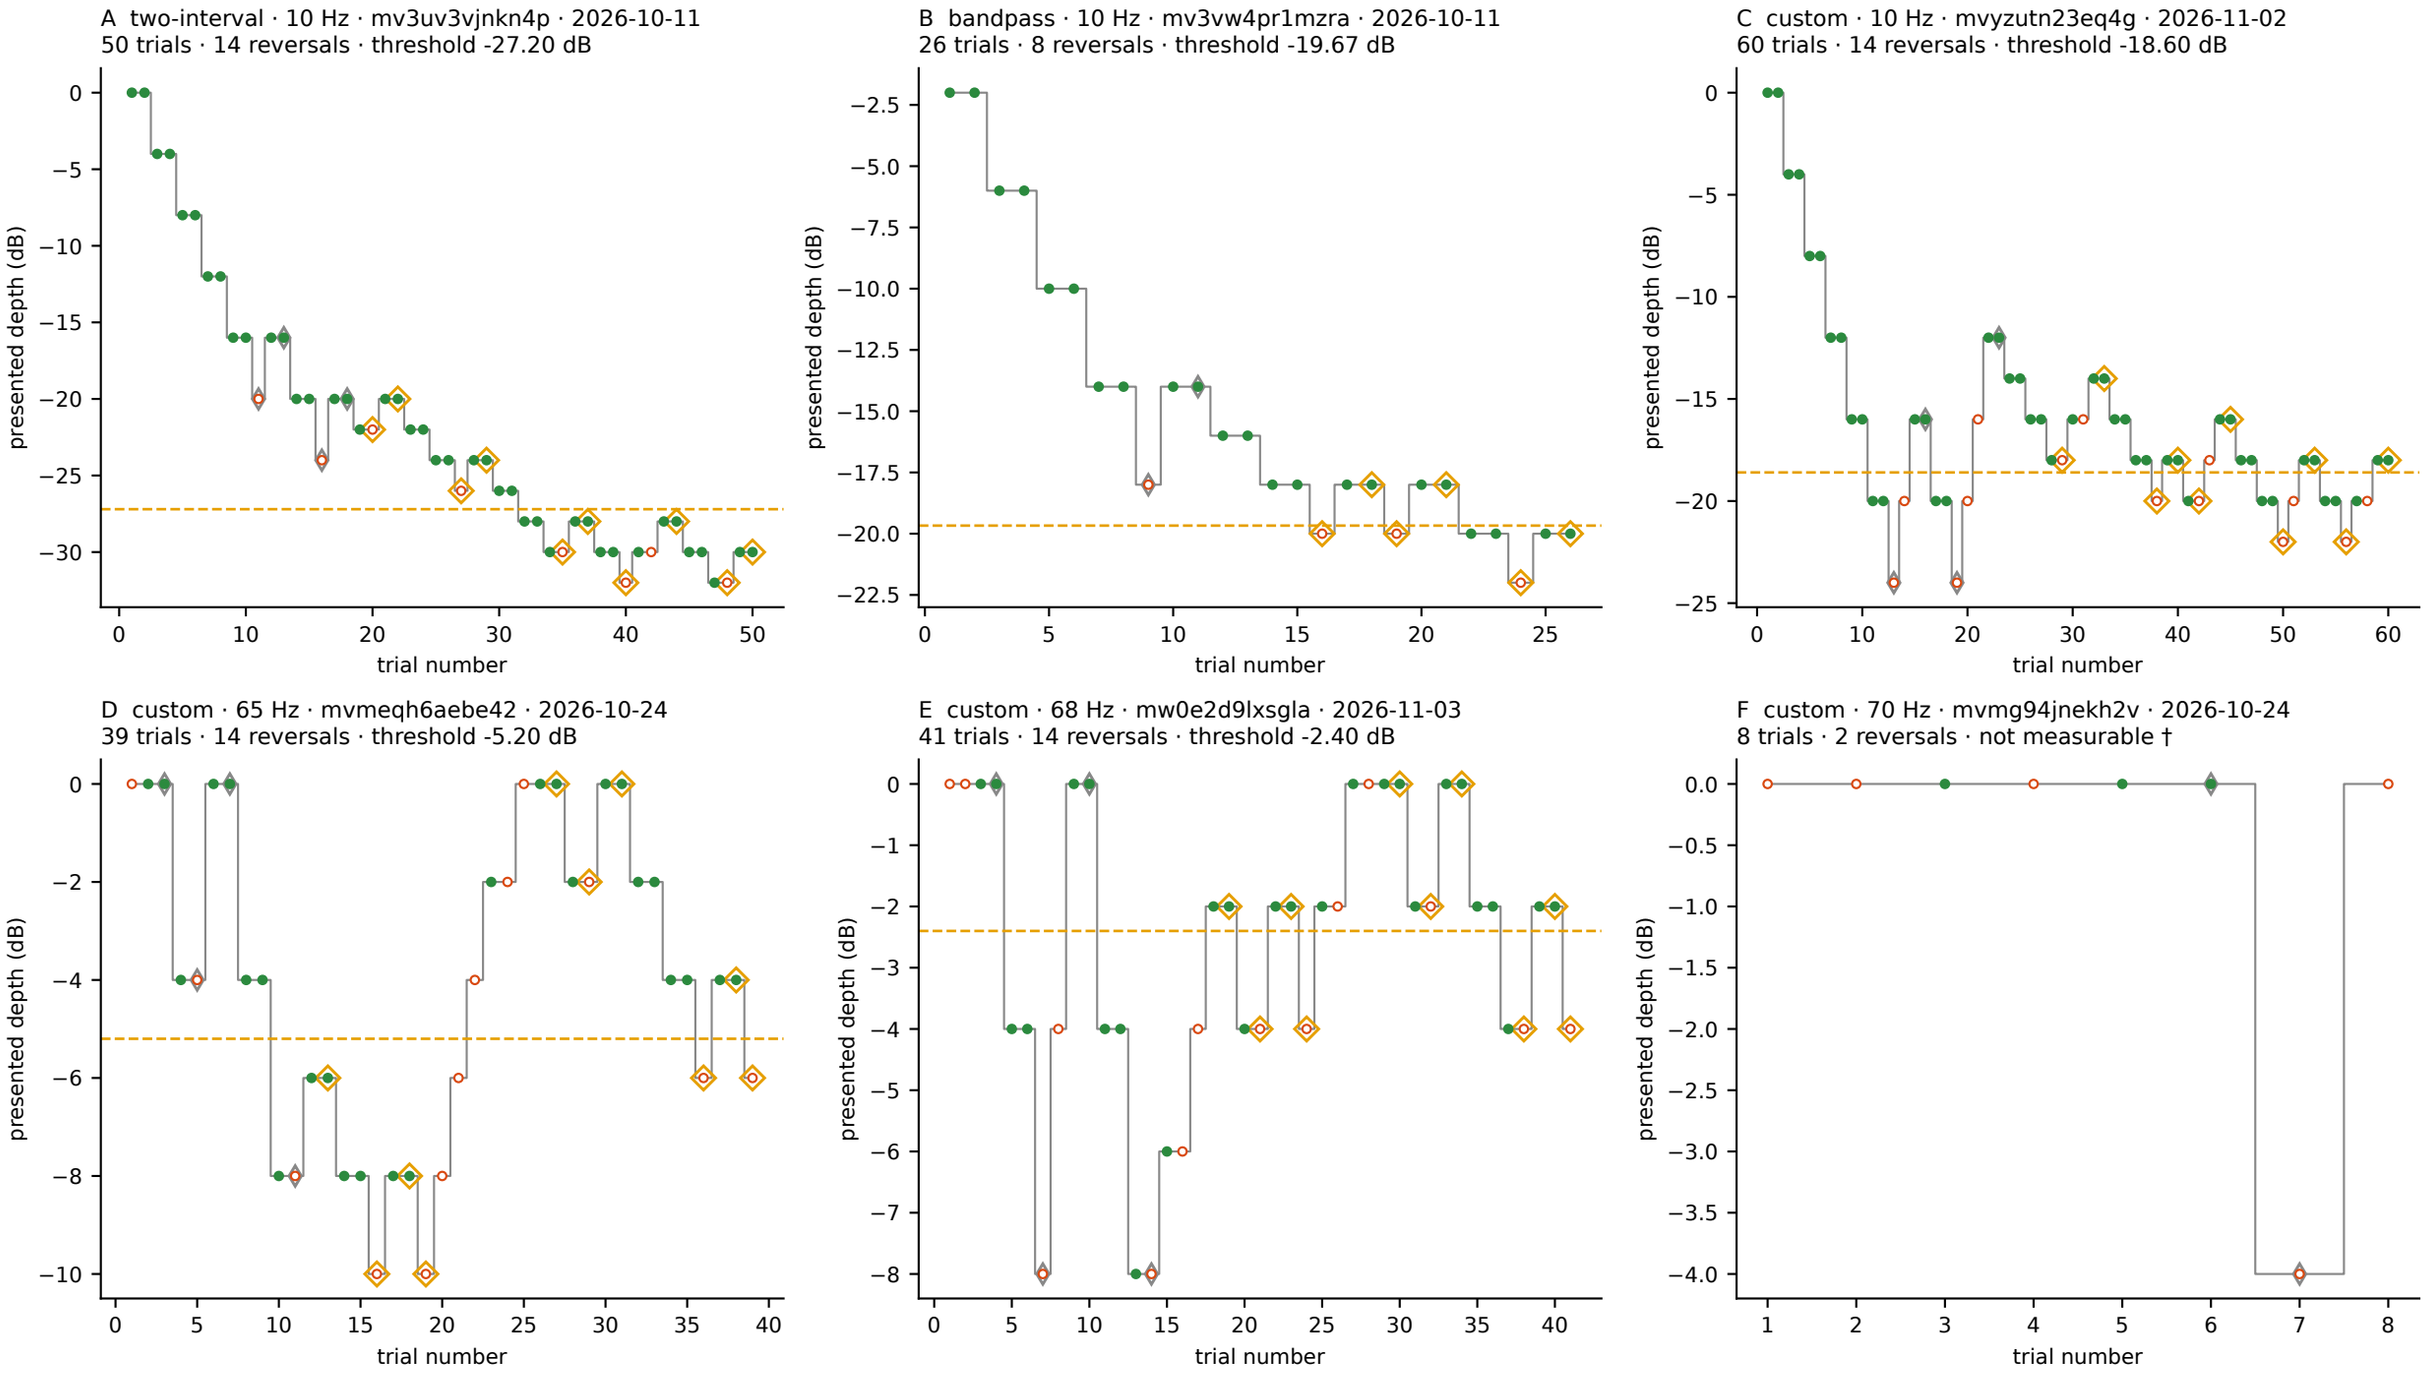

Right ear, earliest record at each protocol/frequency (not selected for good outcomes). Filled = correct, open = incorrect, diamonds = reversals (orange = used for the threshold).