

Melitta Caffeo Solo & Milk

Maintenance Guide

Display Indicators



Power

Ready / Heating



Drip Tray

Empty
required →



Clean

Run cleaning →



Beans

Refill beans →



Steam

Steam pipe →



Descal

Run descaling
→



Water

Fill reservoir →



Filter

Replace filter →



Daily Maintenance

Daily

① Empty drip tray and coffee grounds container

② Refill beans if low

③ Fill water reservoir with fresh water

④ Wipe exterior with soft damp cloth





Steam Pipe Cleaning

After Each Use

Rinse the steam pipe after every use to prevent milk residue buildup.

- ① **Switch on** the appliance
- ② Fill vessel halfway with clear water, immerse steam pipe tip
- ③ Press  button.  flashes while heating, then illuminates.
- ④ Turn valve clockwise (5 sec), close. Wait (30 sec) or press 

Deep Clean (Weekly)

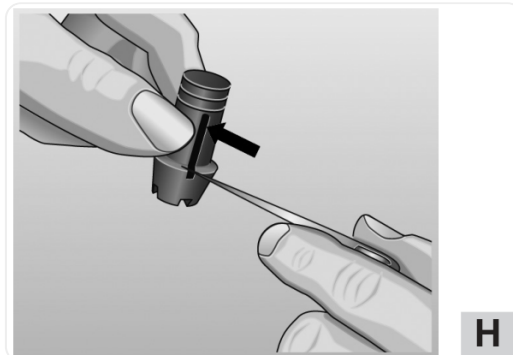
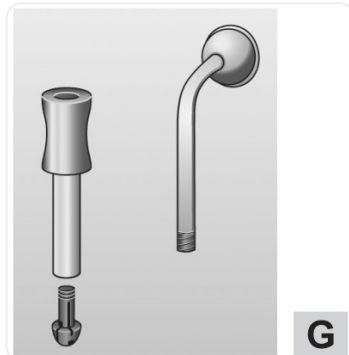


- ① **Let cool down**, wipe steam pipe on outside with damp cloth
- ② **Twist off** steam pipe (turn in arrow direction)
- ③ **Pull nozzle** out of steam pipe
- ④ **Rinse all parts** with water and dishwashing detergent if necessary
- ⑤ **Clean nozzle** with pointed object or brush
- ⑥ **Reassemble:** push nozzle into steam pipe, twist on (opposite direction)

Brewing Unit Cleaning

Weekly

Switch off appliance and unplug before cleaning!

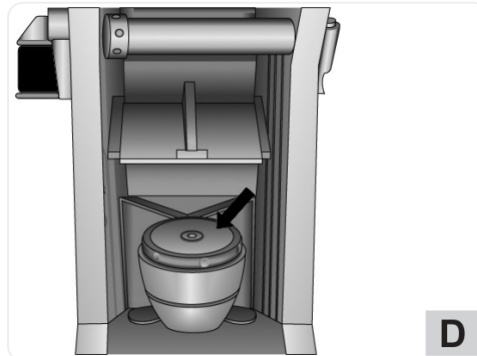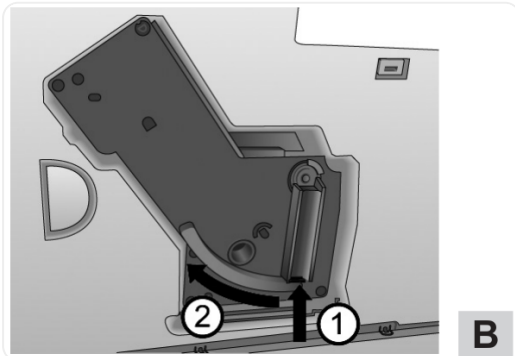

- ① **Remove cover** (pull right side panel off)
- ② **Press and hold red button** on handle, turn clockwise until stop, pull out
- ③ **Rinse thoroughly** with clear water on all sides. Ensure brewing chamber area is free of coffee residues.
- ④ **Let dry**, remove coffee residues from machine interior
- ⑤ **Reinsert:** press and hold red button, turn counterclockwise until stop
- ⑥ **Insert cover** until it clicks in



Cleaning Program

Every 2 months / 200 cups

~15 min

Required: Melitta Cleaning Tabs


Do not interrupt the program.

- ① **Switch off**, fill water reservoir to MAX
- ② Hold ① +   for >2 sec →  flashes,  illuminates
- ③ **Empty drip tray**, reinsert *without* grounds container. Place grounds container under outlet.



Phase 1

- ④ Two rinsing processes will be performed.
When  lights:
Remove brewing unit, clean it, insert cleaning tab, reinstall

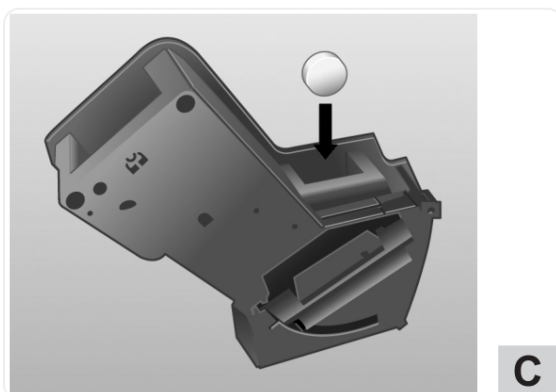



Phase 2

5 When  lights: **Refill water** to MAX

6 Press  to continue (~5 min)



Phase 3

7 When  lights: **Empty drip tray and grounds container**
Reinsert drip tray *without* grounds container. Place grounds container under outlet.

8 Program continues (middle bean flashing) (~5 min)

9 When  lights: **Empty and reinsert** drip tray + grounds container as usual
Done!



Descaling Program

Every 3 months

~30 min

Required: Melitta ANTI CALC descaler + supplied hose

Descaling agent can cause skin irritation. Follow safety instructions on packaging.



- 1 **Switch off.** Pull hose ~1cm over steam pipe. Place grounds container to the right with hose protruding into it.
- 2 **Remove water filter** if installed
- 3 Hold  +  for 3 sec →  flashes,  illuminates

Phase 1

- 4 **Empty and reinsert** drip tray.  illuminates.
- 5 **Completely empty** water reservoir. Add descaler per packaging instructions, fill to MAX.
- 6 Press  to start (~15 min)

Phase 2

- 7 When  lights: Ensure grounds container is under steam pipe with hose
- 8 **Turn valve clockwise** until stop.  flashing. Water flows intermittently into container. (~10 min)
- 9 When  lights: **Empty drip tray and grounds container**
Reinsert drip tray, put grounds container back under steam pipe
- 10 **Rinse reservoir thoroughly**, fill with fresh water to MAX
- 11 Press  to continue.  flashing. Water flows into grounds container.



Phase 3

- ⑫ When  lights: **Turn valve counterclockwise** until stop. Water flows into drip tray.
- ⑬ When  lights: **Empty and reinsert** drip tray + grounds container
- ⑭ When  lights: **Done!** Reinstall water filter if used.



Water Filter Replacement

Every 2 months

Required: Melitta Claris Water Filter

- ① **Soak new filter** in glass of water for several minutes
- ② **Switch off**, hold ① +  for 3 sec →  flashes
- ③ **Empty drip tray**, reinsert without grounds container.  illuminates.
- ④ **Remove & empty** water reservoir, screw filter onto thread at bottom
- ⑤ **Fill reservoir** to MAX, reinsert.  illuminates.
- ⑥ **Place grounds container** under steam pipe, turn valve clockwise.  flashes, water flows.
- ⑦ When  lights: **close valve**. ① +  illuminate. Water hardness auto-set to level 1.
- ⑧ **Empty and reinsert** grounds container. Ready!

Water may be cloudy during first rinse (activated carbon). This is normal.

All Procedures

Quick reference to all procedures in the [original manual](#).

Procedure	Description	Page
First Use Setup	Initial venting and setup before first operation	19
Dispensing Coffee	Preparing one or two cups, adjusting quantity and strength	20
Preparing Milk Froth	Using the steam pipe to froth cold milk	21
Heating Milk	Using the steam pipe to heat milk without frothing	21
Dispensing Hot Water	Getting hot water for tea (max 150ml per cycle)	22
Setting Water Hardness	Configure hardness level using test strip (affects descaling interval)	23
<u>Daily Maintenance</u>	Empty drip tray, refill beans/water, wipe exterior	23
<u>Steam Pipe Cleaning</u>	Rinse after each use, deep clean weekly	23
<u>Brewing Unit Cleaning</u>	Remove, rinse, and dry brewing unit weekly	23-24
<u>Cleaning Program</u>	Integrated cleaning with Melitta tabs (~15 min)	24
<u>Descaling Program</u>	Integrated descaling with Melitta ANTI CALC (~30 min)	25
<u>Water Filter Replacement</u>	Install/replace Melitta Claris water filter	22
Energy-Saving Mode	Adjust time before appliance enters standby (5-30 min or off)	26
Auto-OFF Function	Set automatic shutdown time (30 min to 8 hours)	26
Brewing Temperature	Adjust coffee temperature (low, medium, high)	26
Grinding Fineness	Adjust grinder (only while running, after ~1000 cups)	26-27

Procedure	Description	Page
Venting (for Transport)	Remove water from system before transport or storage	27
Troubleshooting	Common problems, causes, and solutions	28

Based on Melitta Caffeo Solo & Milk Operating Instructions
For complete instructions, refer to the [original manual](#)