



0.625" DIA



BLANK: 3.170"



L: 3.125"

END SQUARED / UPSET




L: 3.080"


CONE FORMED



HEAD: 0.900" DIA
PRE-HEAD / POINT

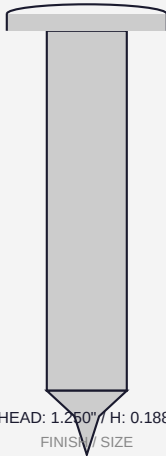

HEAD: 1.250" / H: 0.188"
FINISH / SIZE

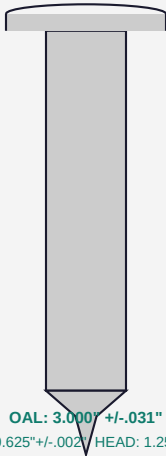

OAL: 3.000" +/- .031"
SHANK: 0.625" +/- .002" HEAD: 1.250" +/- .005"

1. WIRE DIA: 0.625" +/- .002" (AS-RECEIVED FROM COIL)
2. STATION 1 — UPSET END: SQUARE BLANK, INITIATE POINT FORM, WORK-HARDEN TIP ZONE
3. STATION 2 — GATHER MATERIAL: FORM CONE POINT 0.490" TIP DIA, MOVE STEEL TOWARD HEAD END

MIMIR METALS
Warren, Michigan | General Industrial

MACHINE: MM-14 (JBF-30B4SUL)
MATERIAL: SAE 1010 CD
WIRE DIA: 0.625"

PART FAMILY: 5/8" WELD STUD
DRAWING NO: MM-625-WS-PP
PROCESS: UPSET METHOD / STATION

DRAWN BY:

DATE:

REVISION:

MM-625-WS-PP
5/8" WELD STUD PROGRESSION
SCALE: NOT TO SCALE