

The transport layer: Dealing with performance problems

CS 456/656, Fall 2026

Mina Tahmasbi Arashloo

What we have so far

- **One packet at a time:** the sender moves on to the next packet only once it is sure the current one has made it correctly to the receiver
- **Feedback for every packet:** the receiver sends feedback for every packet, positive if the packet was fine, negative if it detects the packet was corrupted using checksums
- **Timers:** the sender uses a timer to detect loss and retransmit. A timer may trigger and cause a retransmission even if the packet is not lost, e.g., if the packet is delayed longer than expected
- **Duplicates:** an unnecessary retransmission can deliver a segment more than once; the receiver uses the segment ID to deal with that

What we have so far


- **One packet at a time:** the sender moves on to the next packet only once it is sure the current one has made it correctly to the receiver
- **Feedback for every packet:** the receiver sends feedback for every packet, positive if the packet was fine, negative if it detects the packet was corrupted using checksums
- **Timers:** the sender uses a timer to detect loss and retransmit. A timer may trigger and cause a retransmission even if the packet is not lost, e.g., if the packet is delayed longer than expected
- **Duplicates:** an unnecessary retransmission can deliver a segment more than once; the receiver uses the segment ID to deal with that

Quick check: what are three scenarios in which an unnecessary retransmission happens?


Is one packet at a time efficient enough?

The protocol we have gets every segment to B. But how efficiently does it do that?


One packet at a time, on a timeline

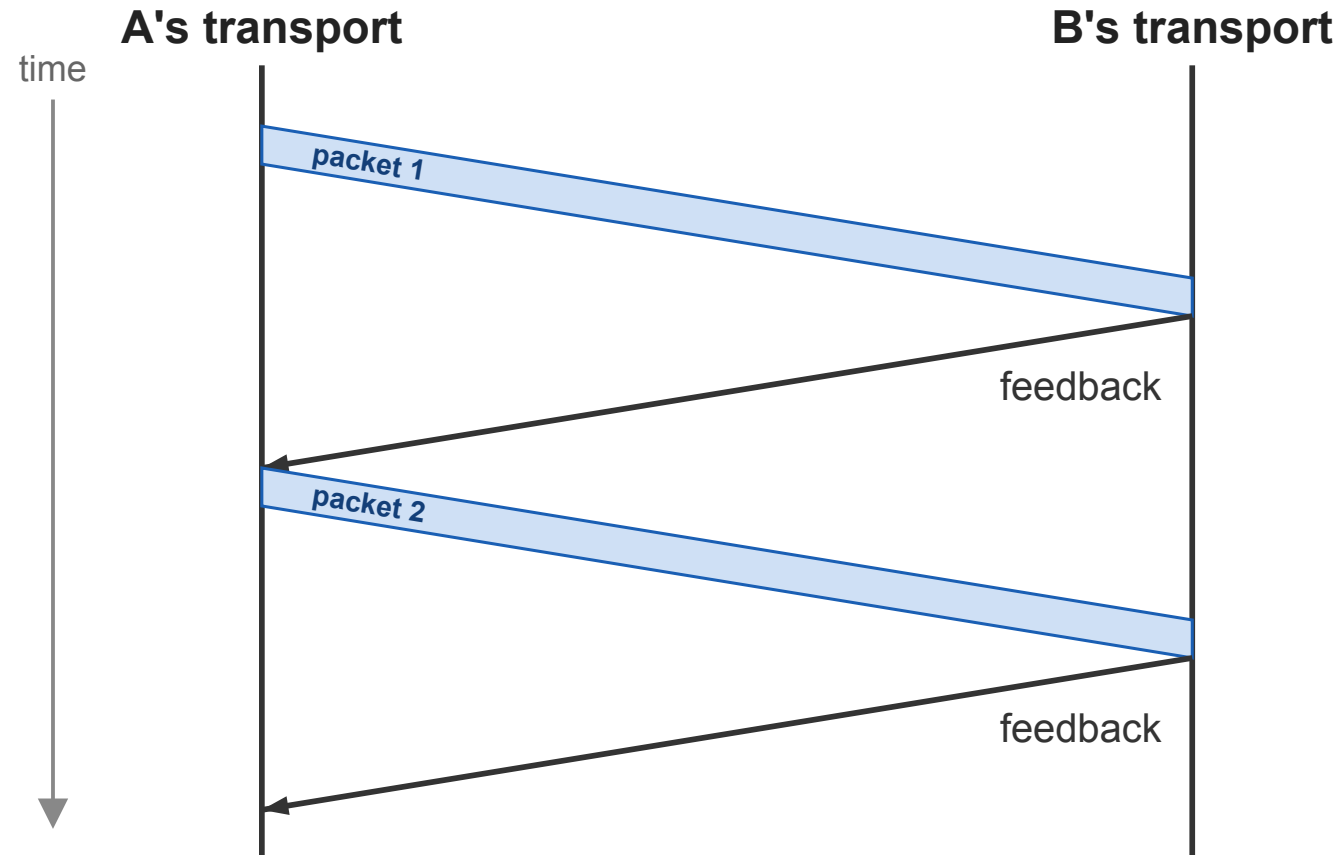


One packet at a time, on a timeline

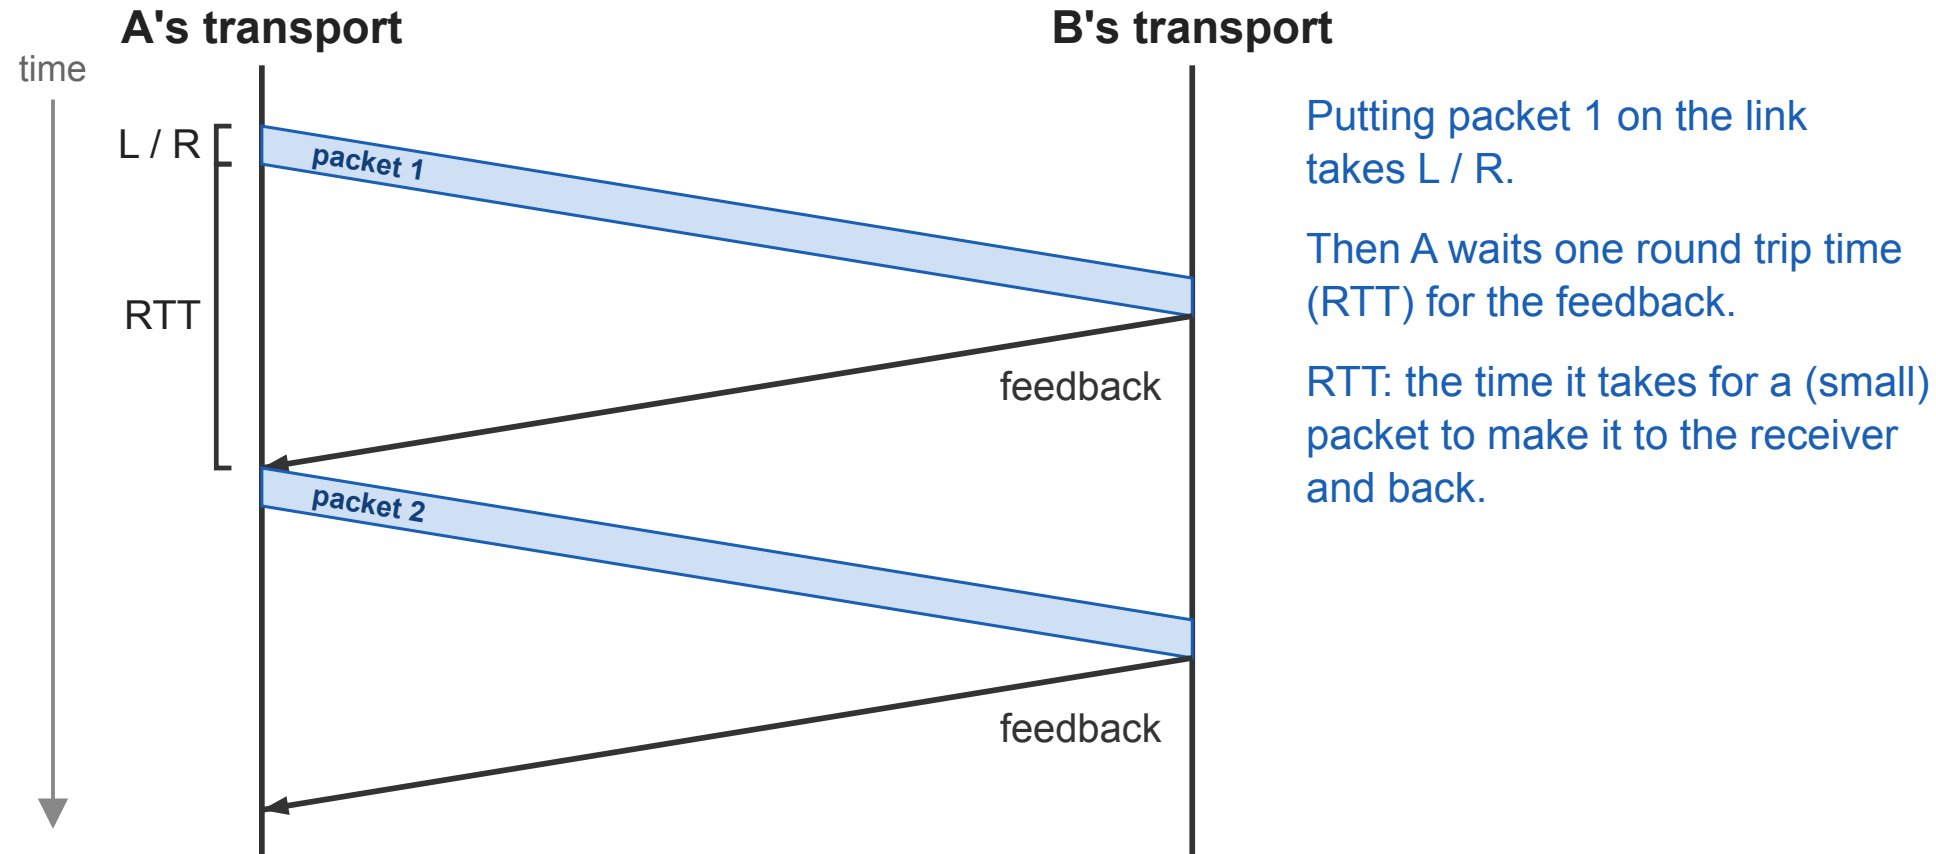

One packet at a time, on a timeline

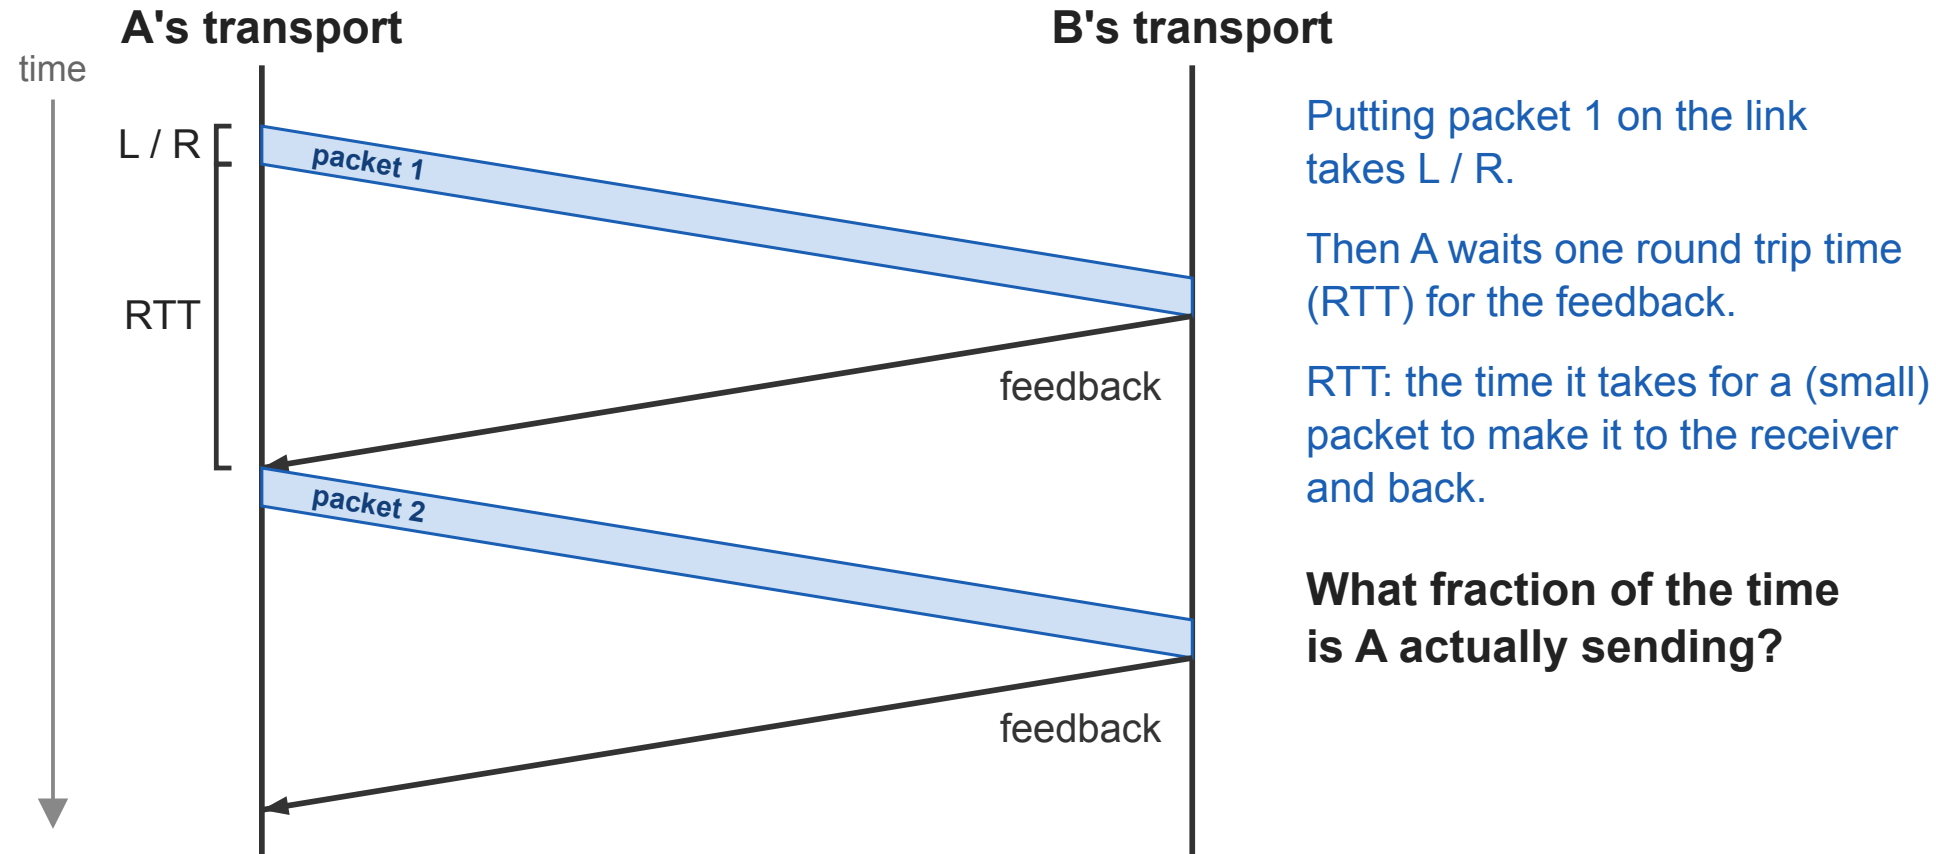

One packet at a time, on a timeline

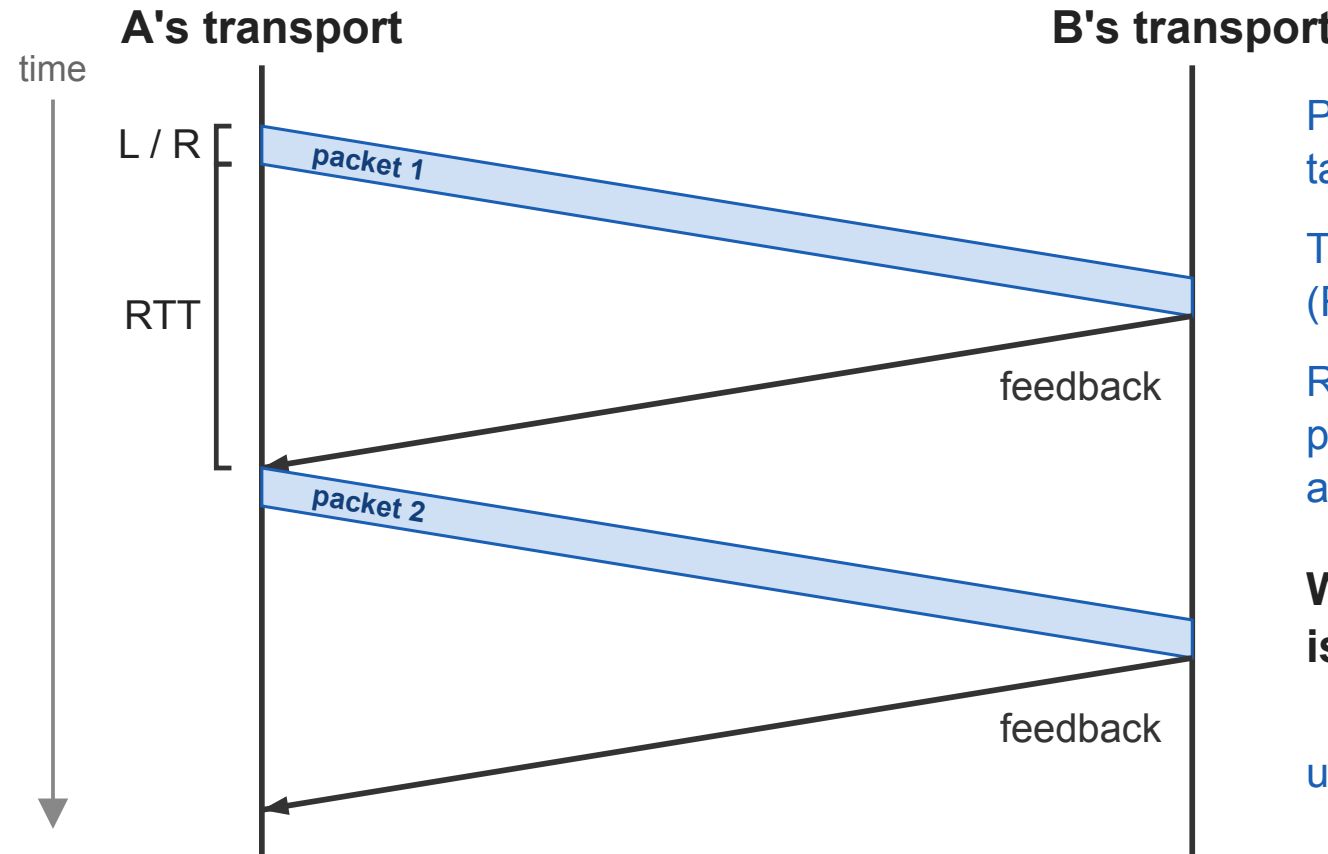

Putting packet 1 on the link takes L/R .

Then A waits one round trip time (RTT) for the feedback.

RTT: the time it takes for a (small) packet to make it to the receiver and back.

What fraction of the time is A actually sending?

$$\text{utilization} = \frac{L/R}{RTT + L/R}$$

How much of the link is A using?

A link of 1 Gbps (10^9 bits per second), 15 ms propagation delay, packets of 8000 bits

How much of the link is A using?

A link of 1 Gbps (10^9 bits per second), 15 ms propagation delay, packets of 8000 bits

putting one packet on the link

$$L / R = 8000 / 10^9 \text{ s} = 0.008 \text{ ms}$$

How much of the link is A using?

A link of 1 Gbps (10^9 bits per second), 15 ms propagation delay, packets of 8000 bits

putting one packet on the link

$$L / R = 8000 / 10^9 \text{ s} = 0.008 \text{ ms}$$

one round trip (assume no waiting delay)

$$\text{RTT} = 2 \times 15 \text{ ms} = 30 \text{ ms}$$

How much of the link is A using?

A link of 1 Gbps (10^9 bits per second), 15 ms propagation delay, packets of 8000 bits

putting one packet on the link

$$L / R = 8000 / 10^9 \text{ s} = 0.008 \text{ ms}$$

one round trip (assume no waiting delay)

$$\text{RTT} = 2 \times 15 \text{ ms} = 30 \text{ ms}$$

fraction of the time A is sending

$$0.008 / (30 + 0.008) = 0.00027$$

How much of the link is A using?

A link of 1 Gbps (10^9 bits per second), 15 ms propagation delay, packets of 8000 bits

putting one packet on the link

$$L / R = 8000 / 10^9 \text{ s} = 0.008 \text{ ms}$$

one round trip (assume no waiting delay)


$$\text{RTT} = 2 \times 15 \text{ ms} = 30 \text{ ms}$$

fraction of the time A is sending


$$0.008 / (30 + 0.008) = 0.00027$$

**The link can carry 10^9 bits per second.
A is only sending about 267K bits per second.**

The link is empty almost all the time

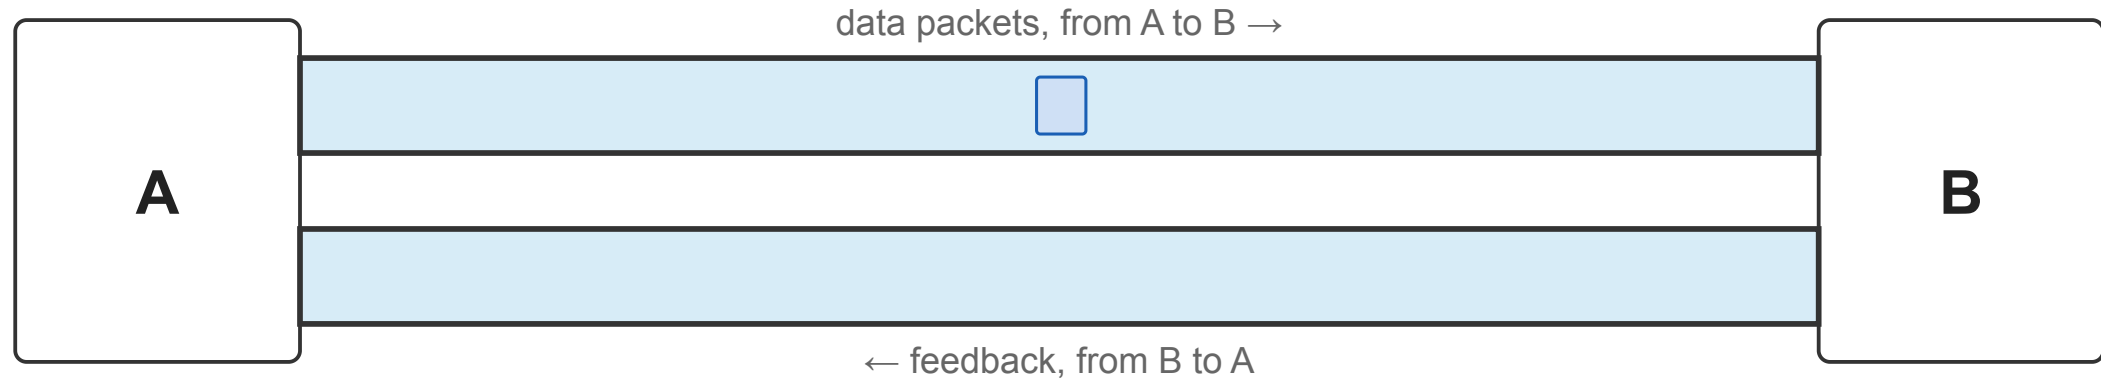


The link is empty almost all the time

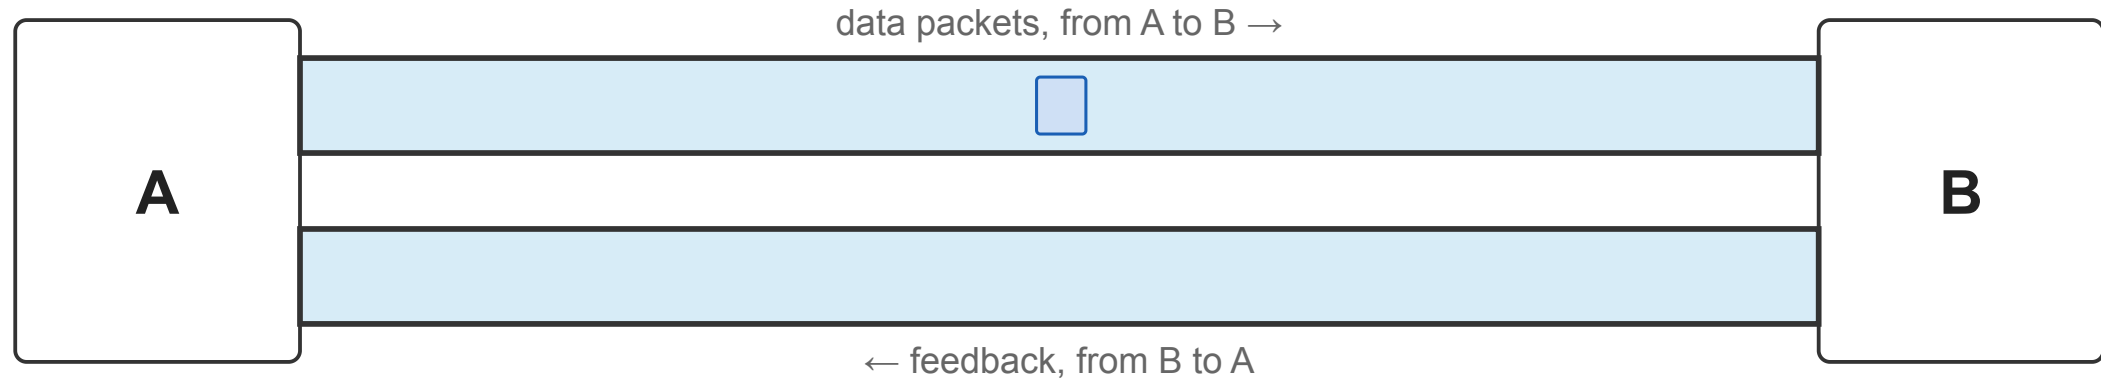

How many packets could A send during one round trip?


The link is empty almost all the time

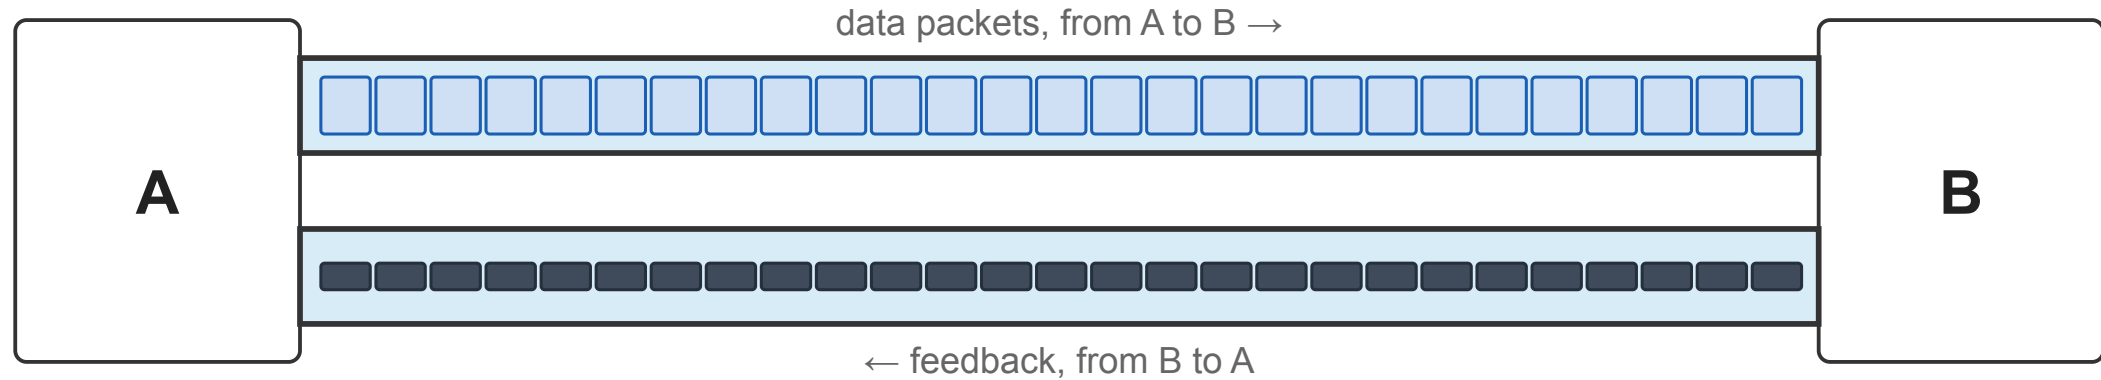

How many packets could A send during one round trip?

$$10^9 \text{ bits per second} \times 0.030 \text{ s} = 30,000,000 \text{ bits} = 3750 \text{ packets}$$

The link is empty almost all the time

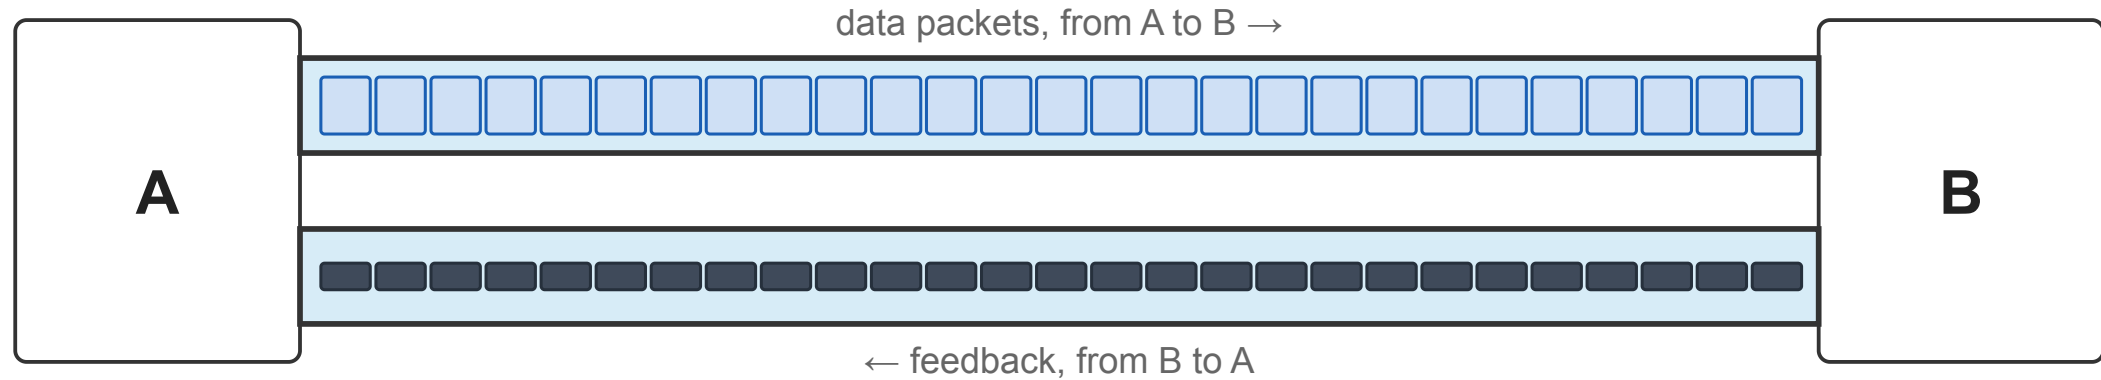


How many packets could A send during one round trip?

10^9 bits per second $\times$ 0.030 s = 30,000,000 bits = 3750 packets

1875 are on their way to B, and the feedback for another 1875 is on its way back

The link is empty almost all the time

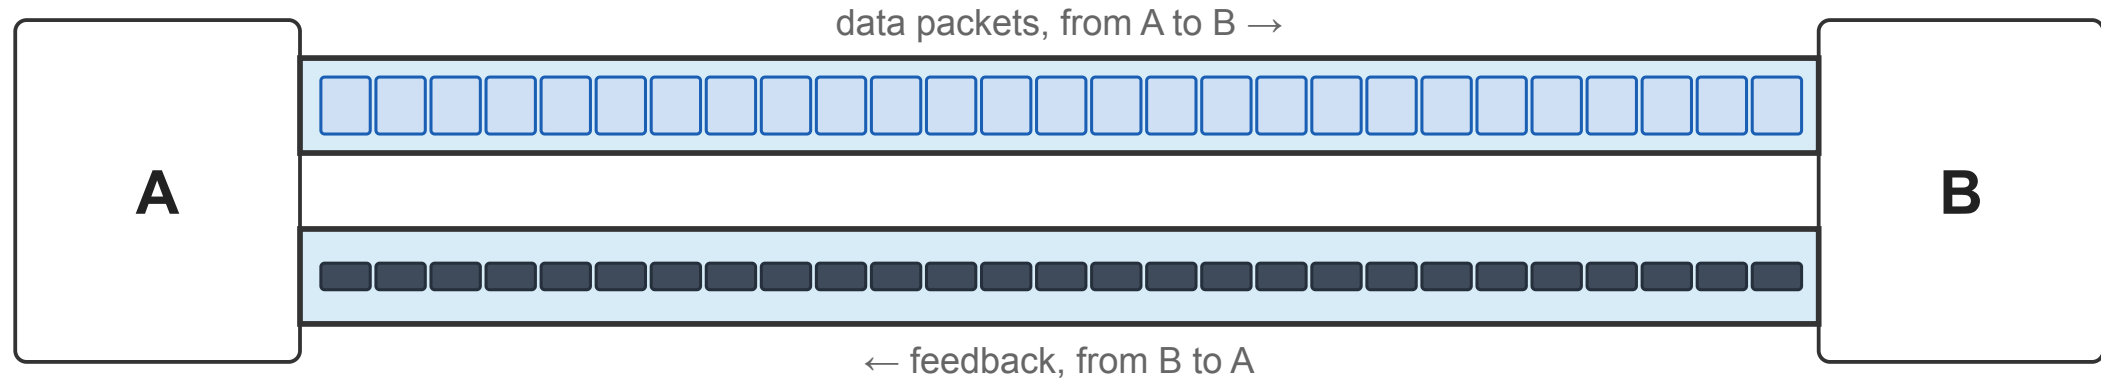

How many packets could A send during one round trip?

10^9 bits per second $\times$ 0.030 s = 30,000,000 bits = 3750 packets

1875 are on their way to B, and the feedback for another 1875 is on its way back


One packet at a time sends 1 of those 3750

What would you change?


A large, empty rectangular box with a thin black border, intended for a user to write their response to the question "What would you change?".

Reset

Example: A batch of three packets at a time

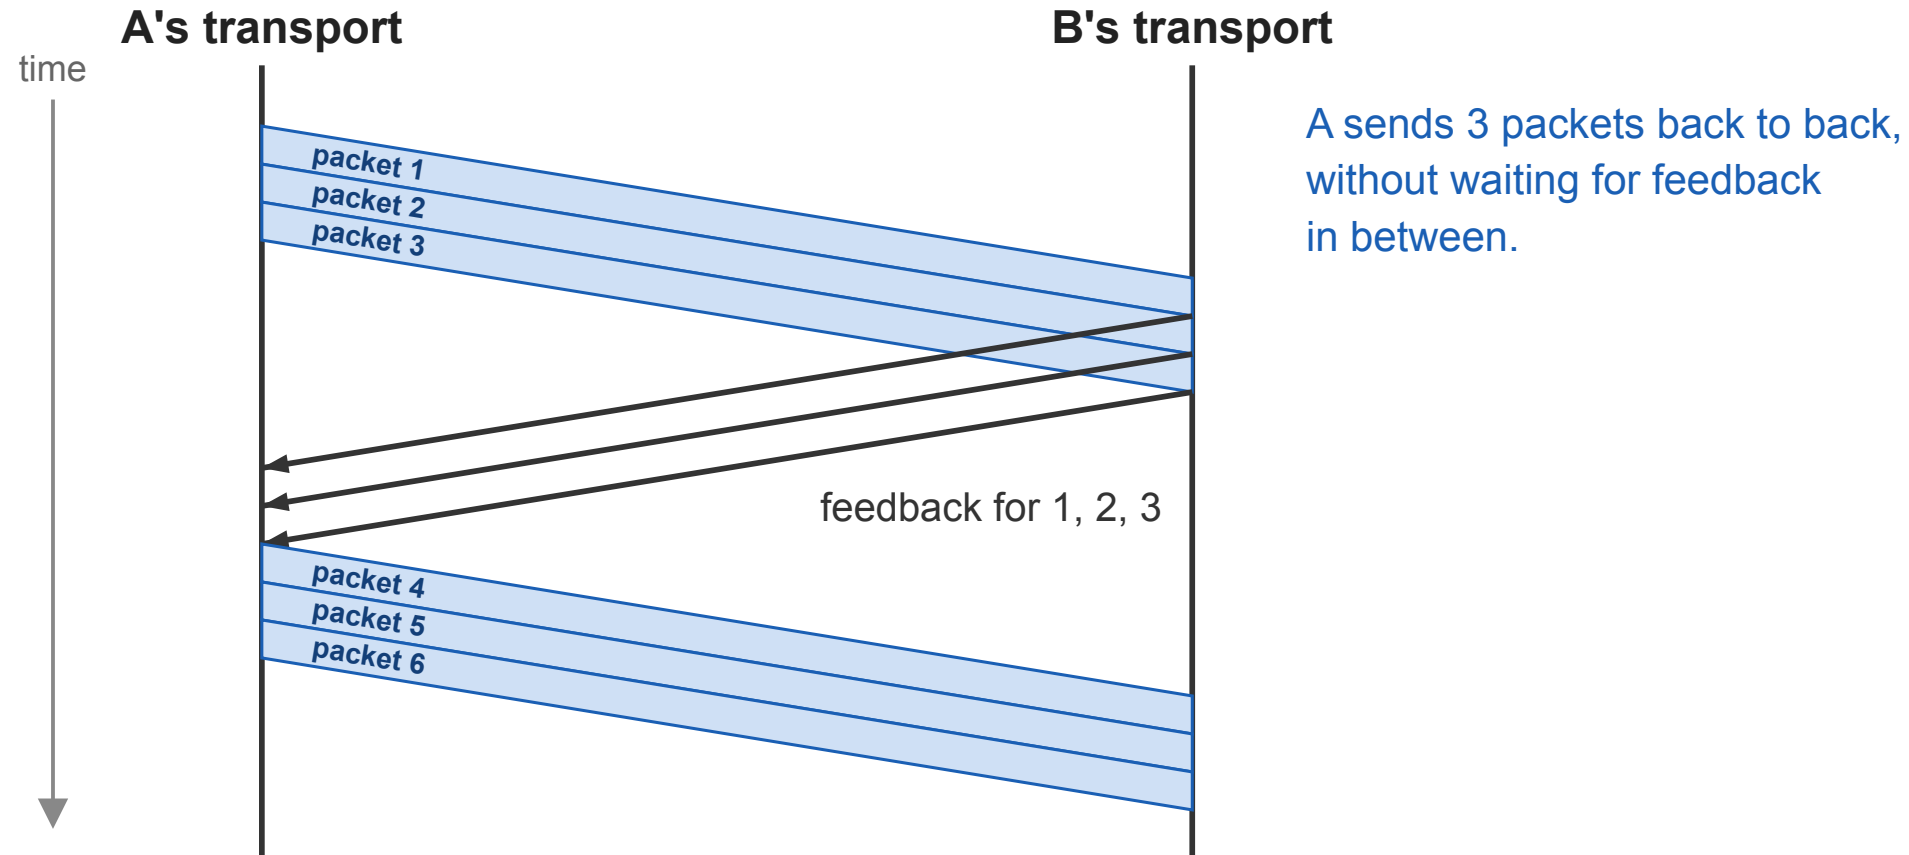


Example: A batch of three packets at a time

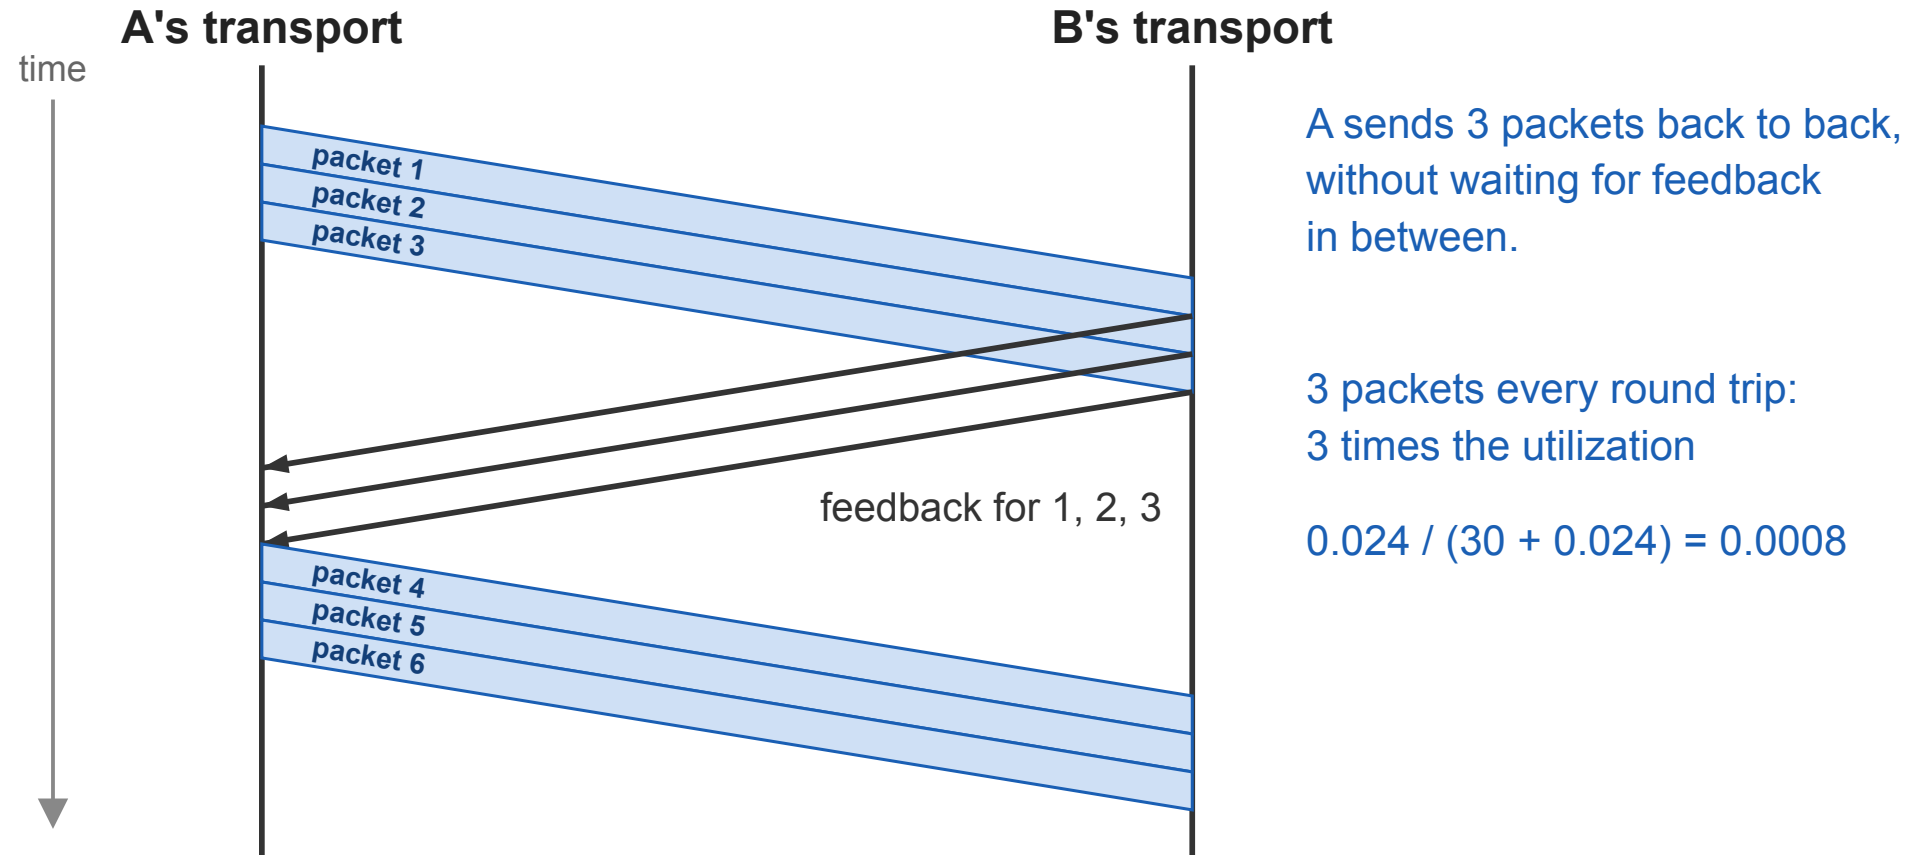


What is a good batch size?

- **Too small:** we are underutilizing the network, and it takes longer to get the data delivered
- **Too big:**
 - The network is shared. If everyone sends everything they have at full speed, it will create congestion that can result in increasing drops and delays (congestion control, Part 2)
 - The sender may “overwhelm” the receiver


“Overwhelming” the receiver

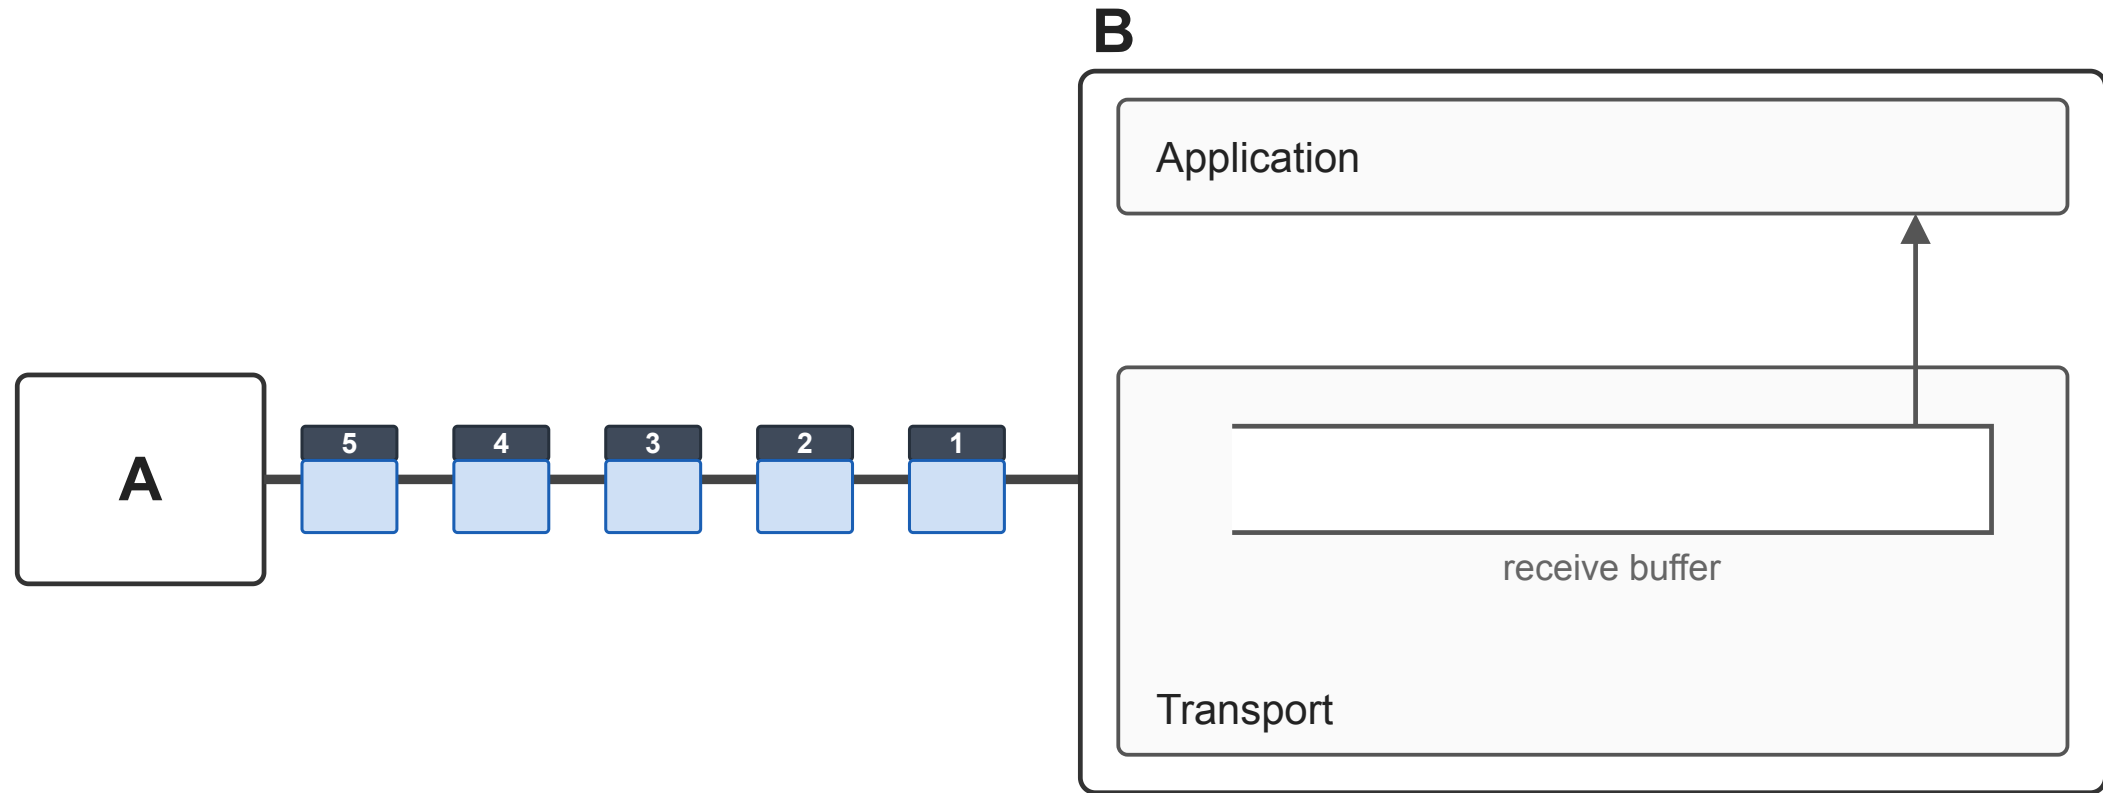


“Overwhelming” the receiver

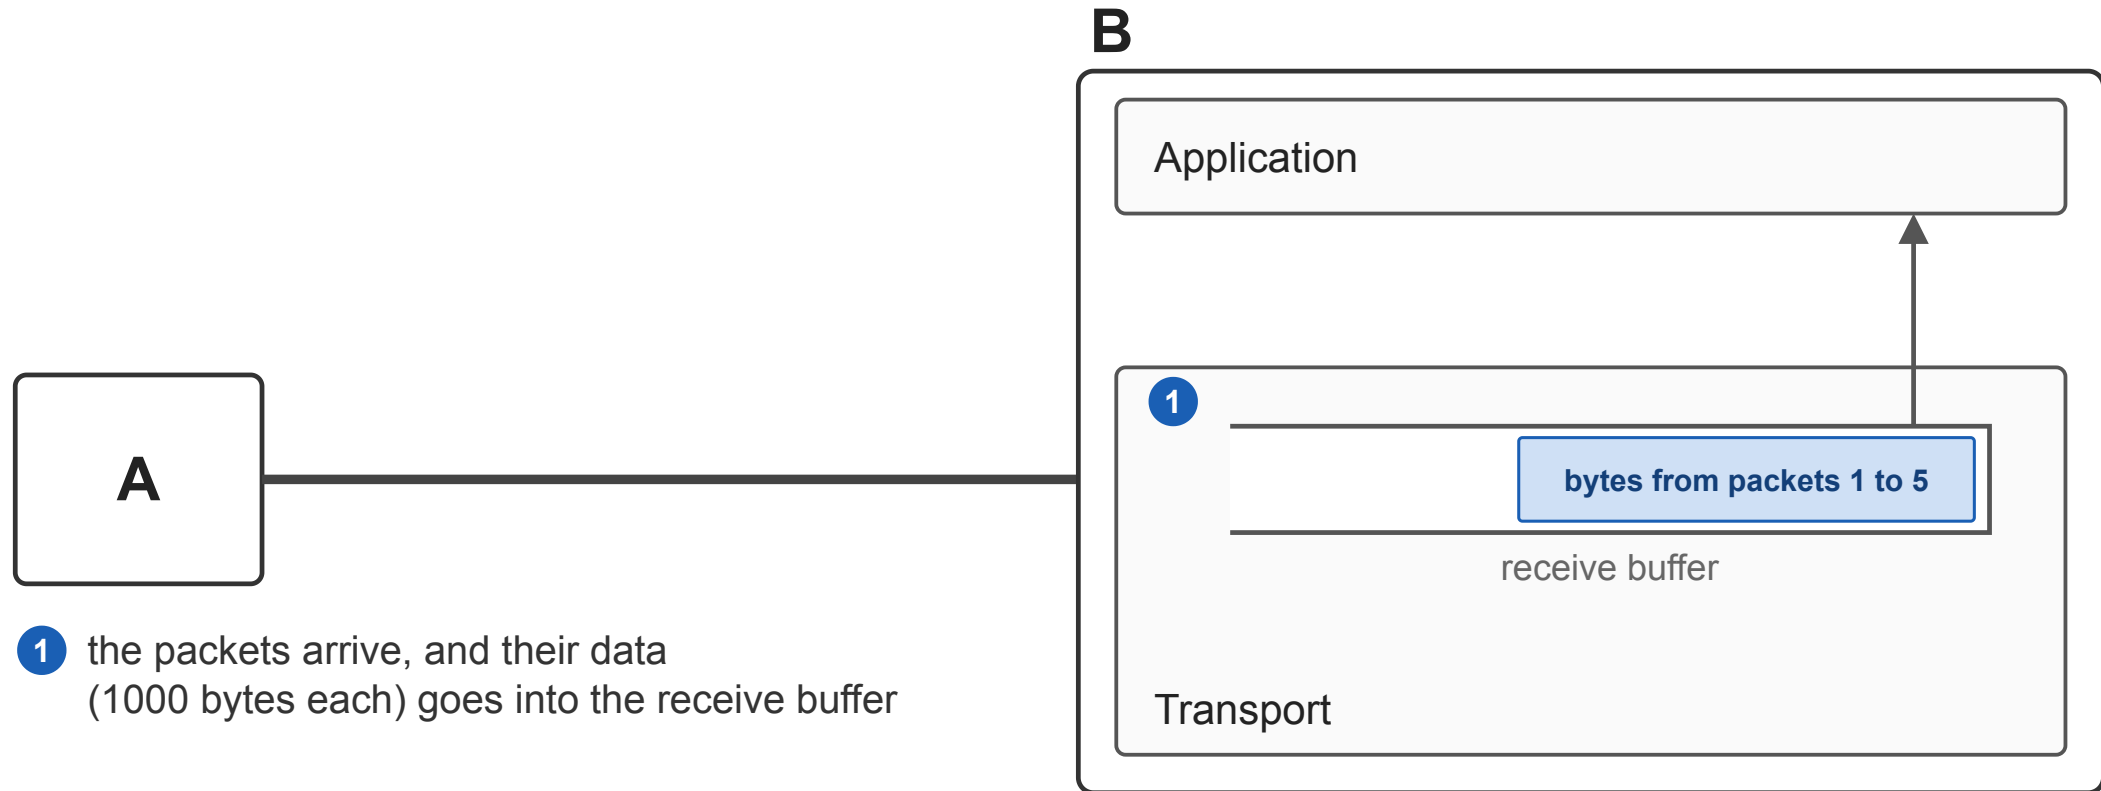


“Overwhelming” the receiver

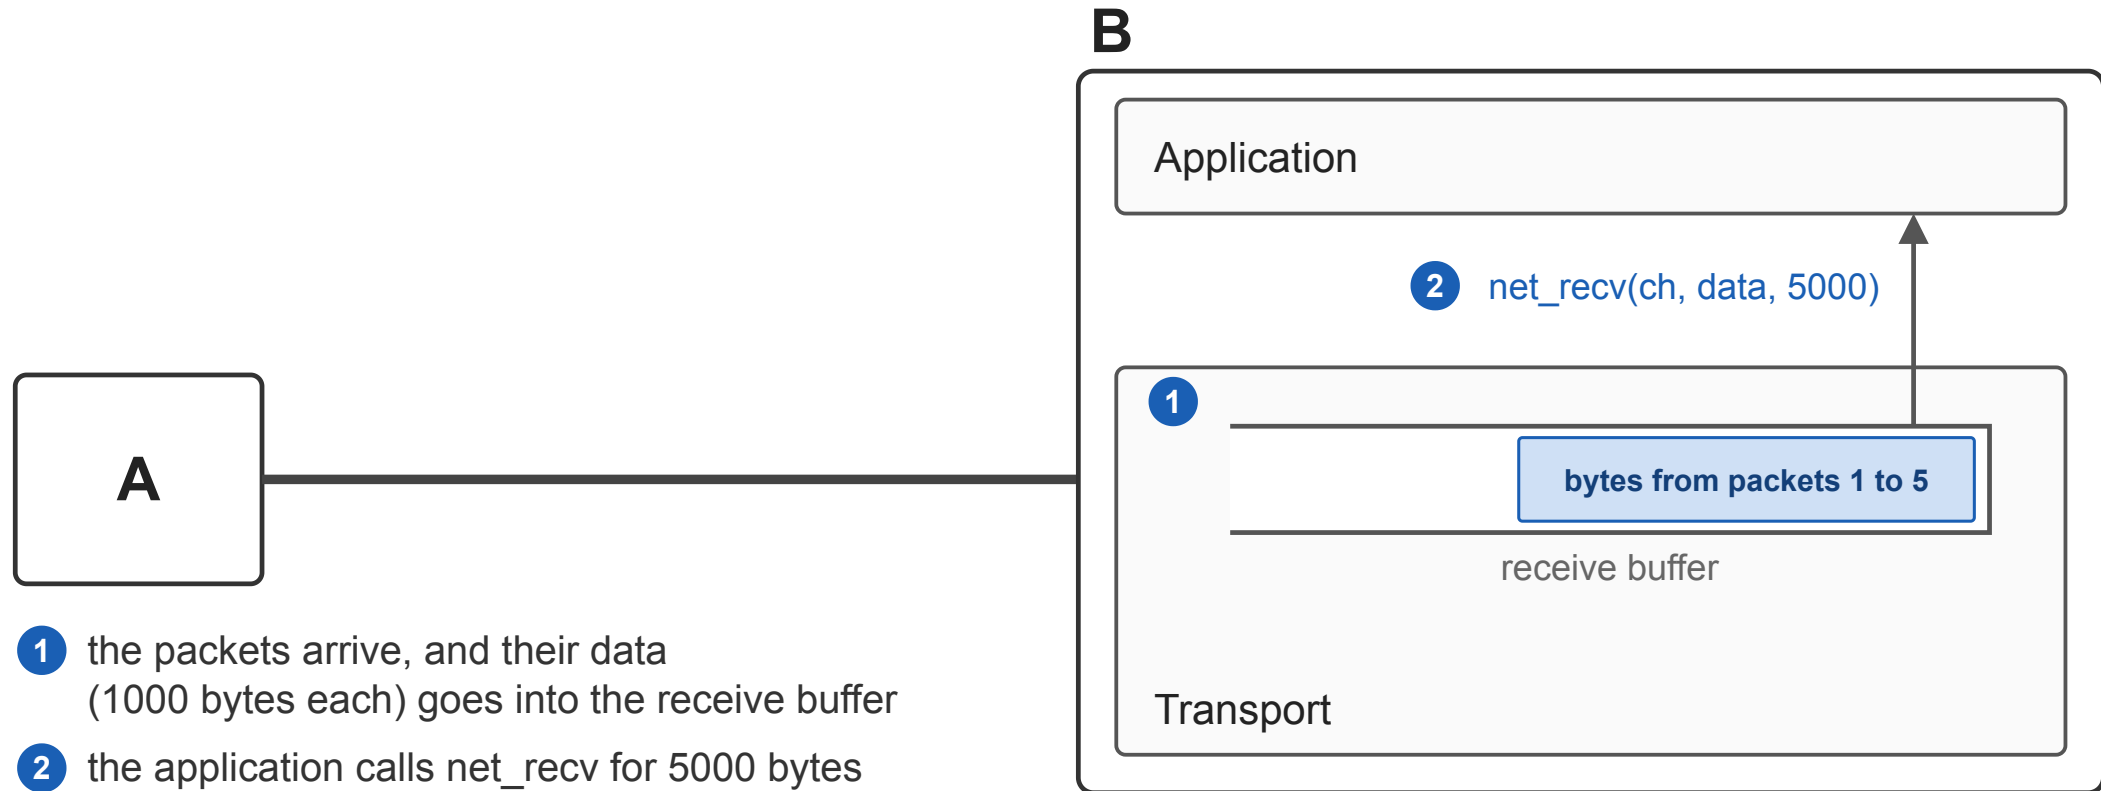


“Overwhelming” the receiver

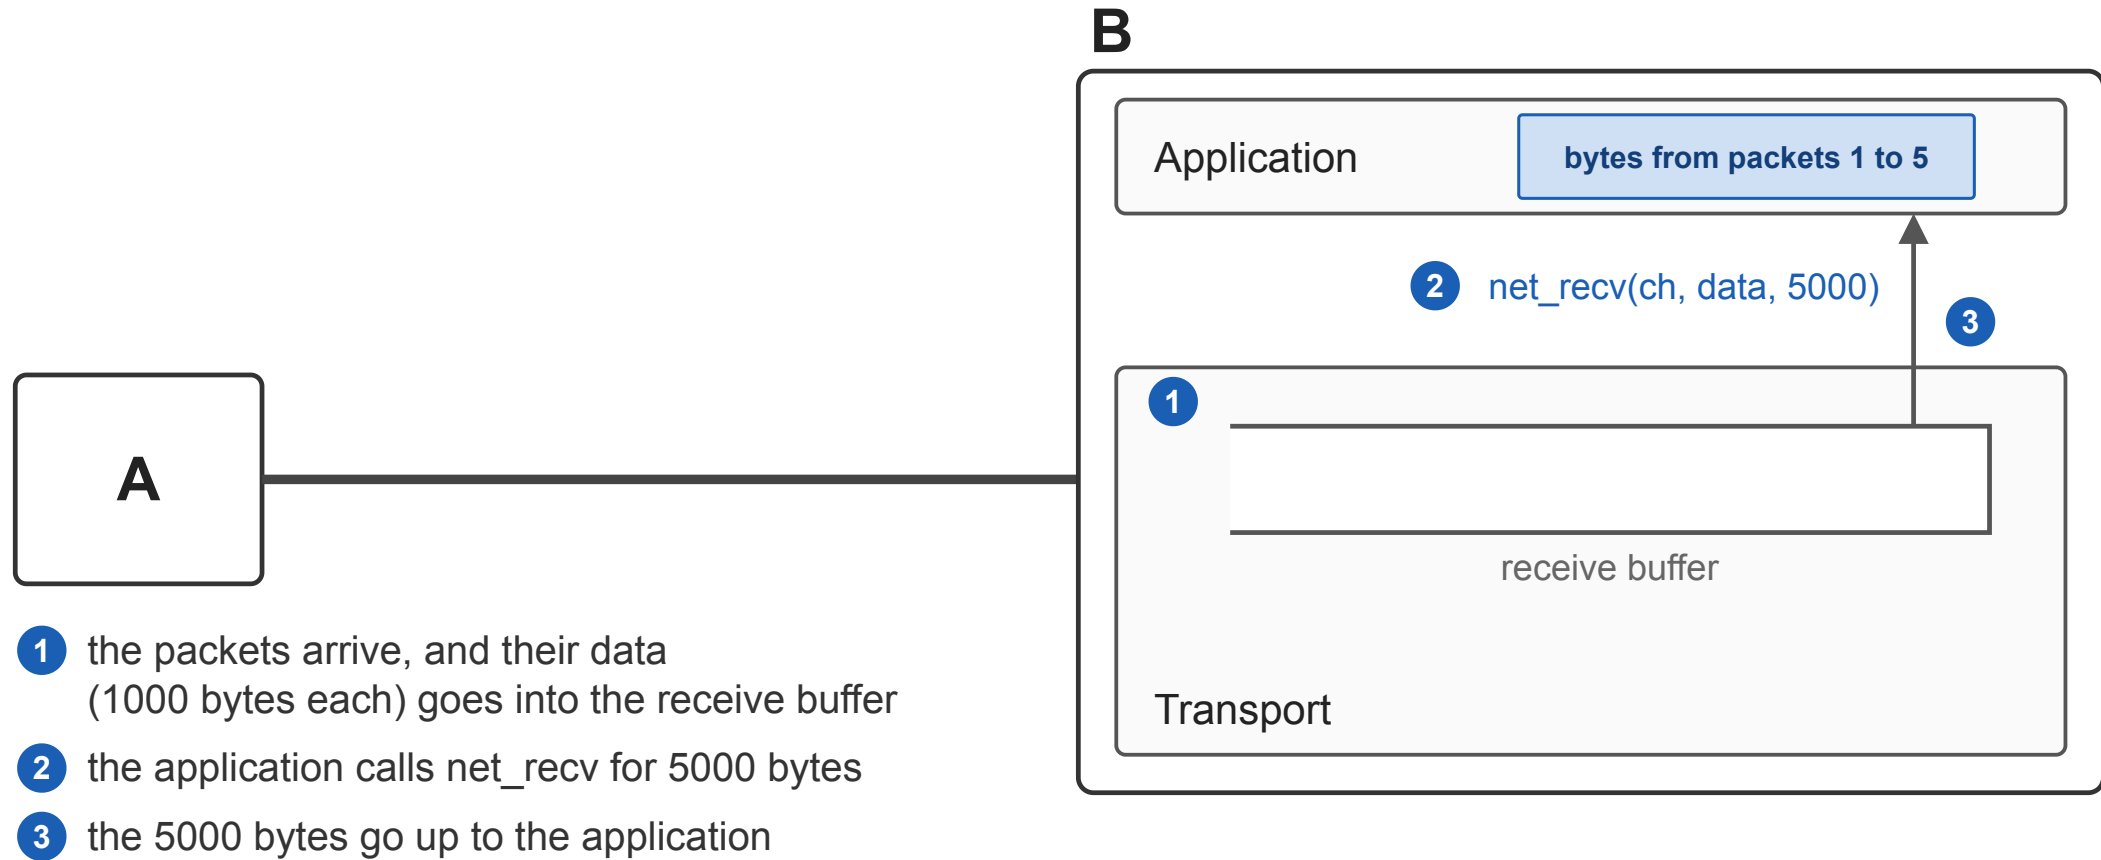

“Overwhelming” the receiver

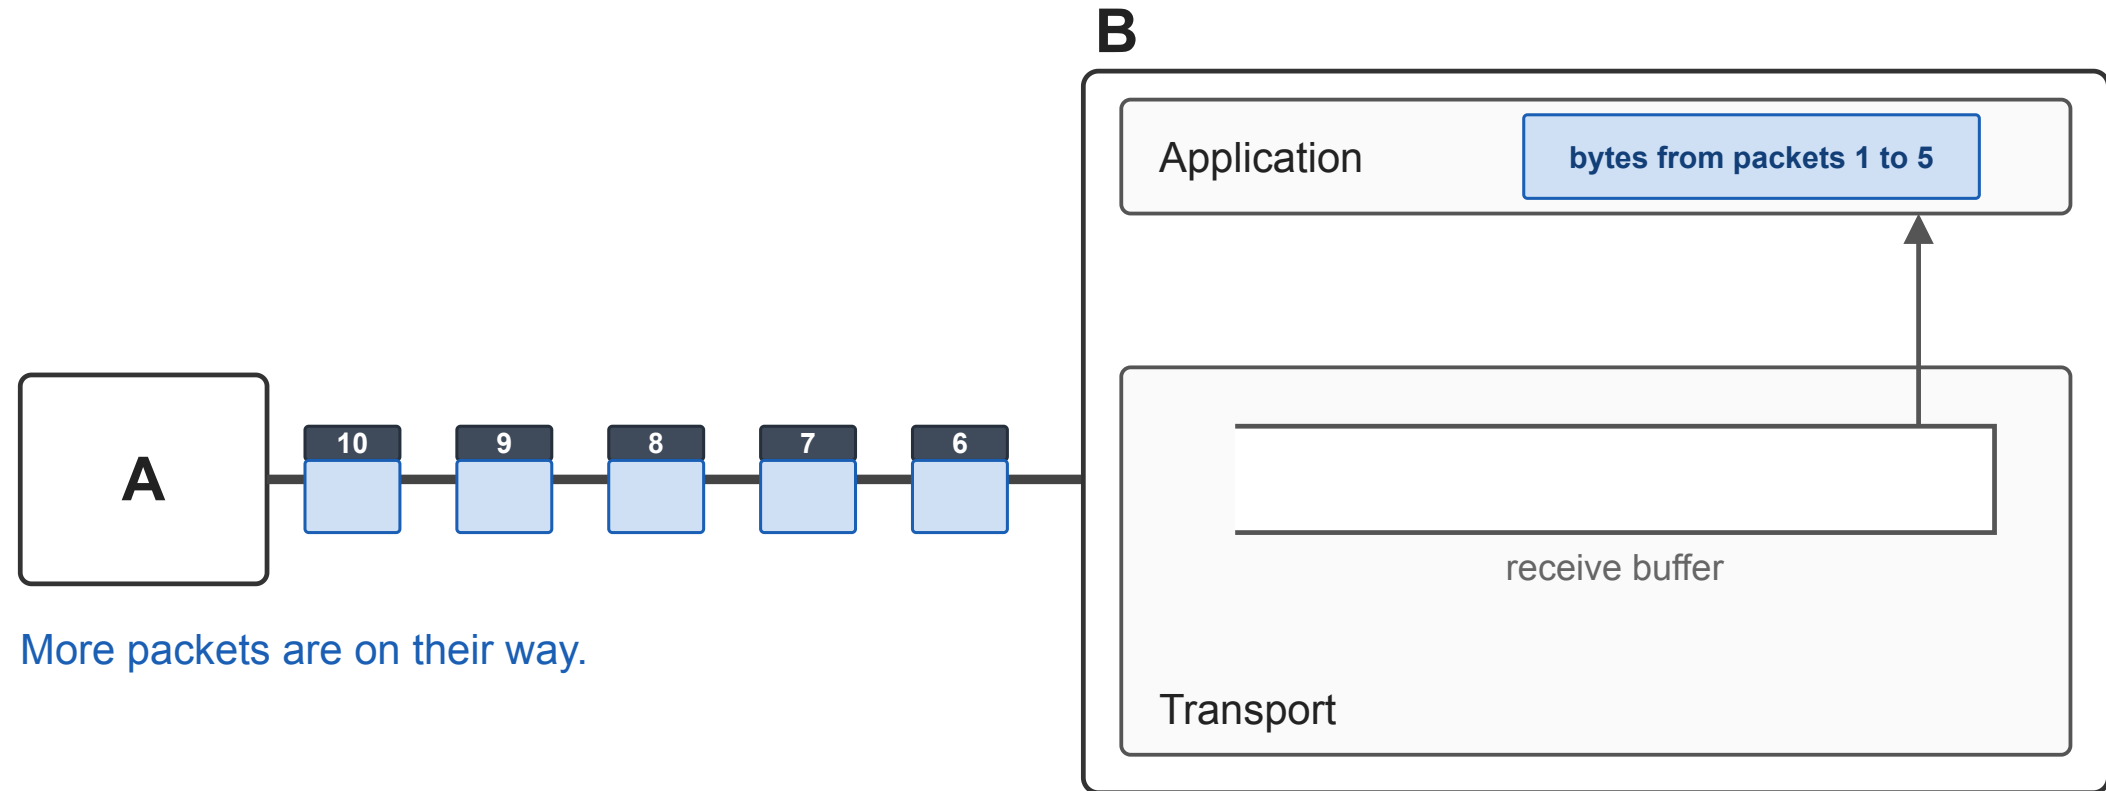


“Overwhelming” the receiver

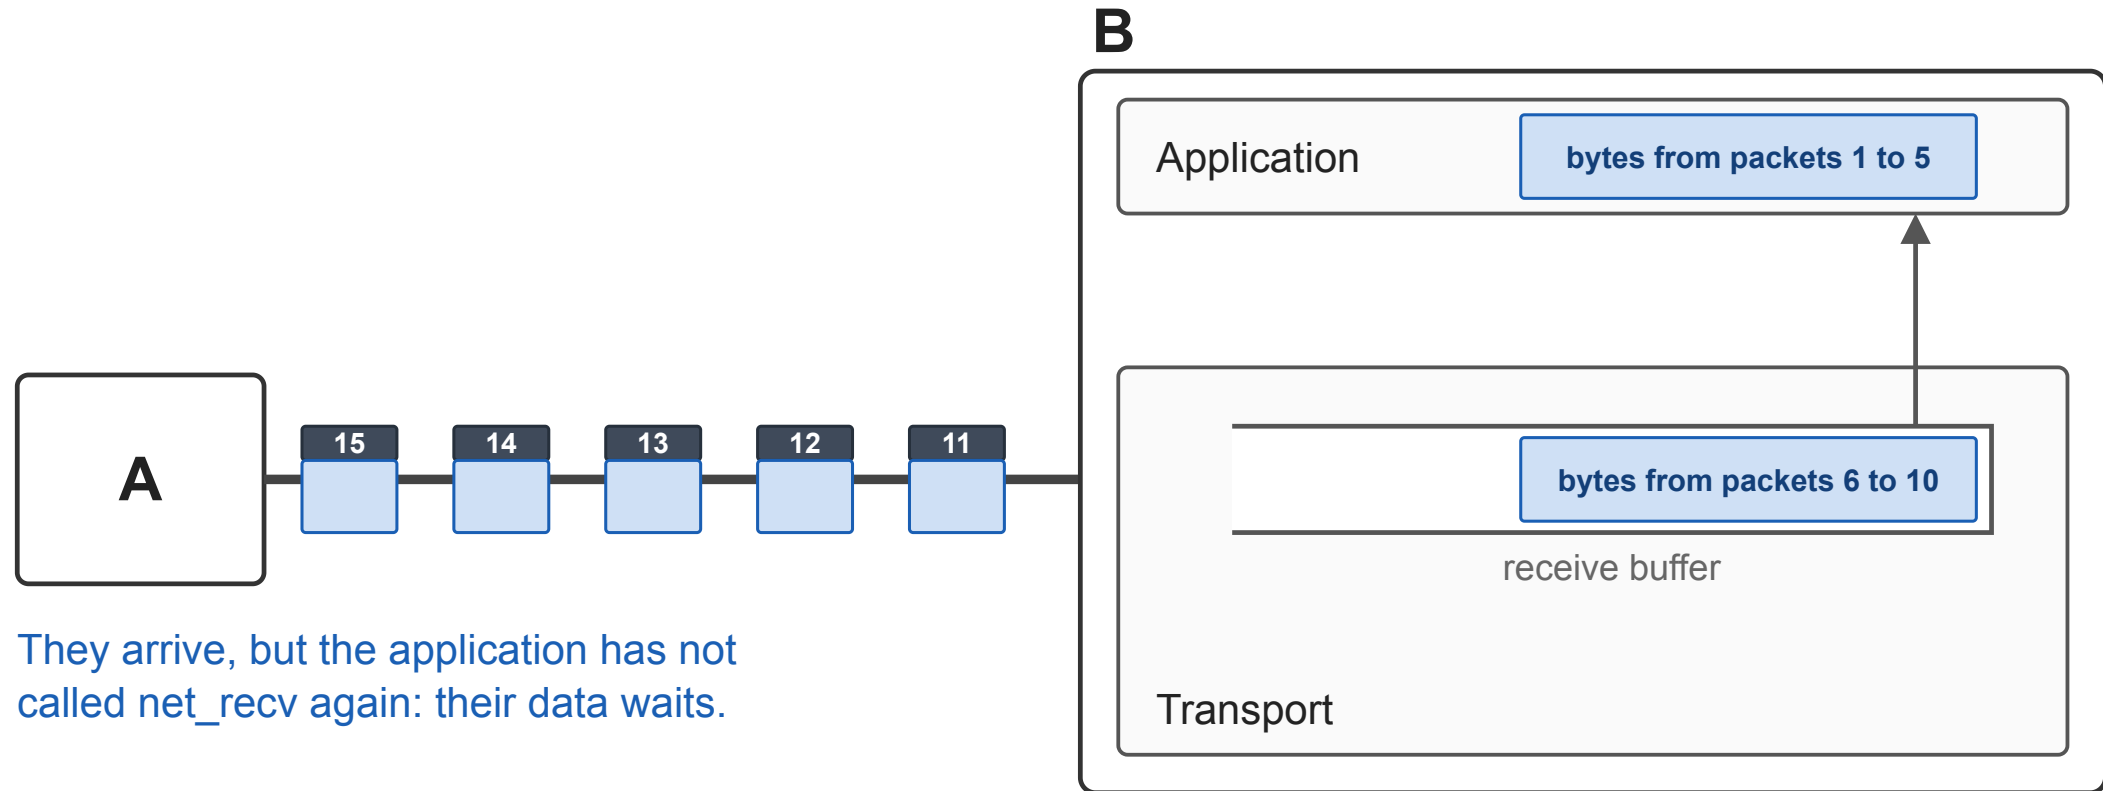


They arrive, but the application has not called `net_recv` again: their data waits.

“Overwhelming” the receiver

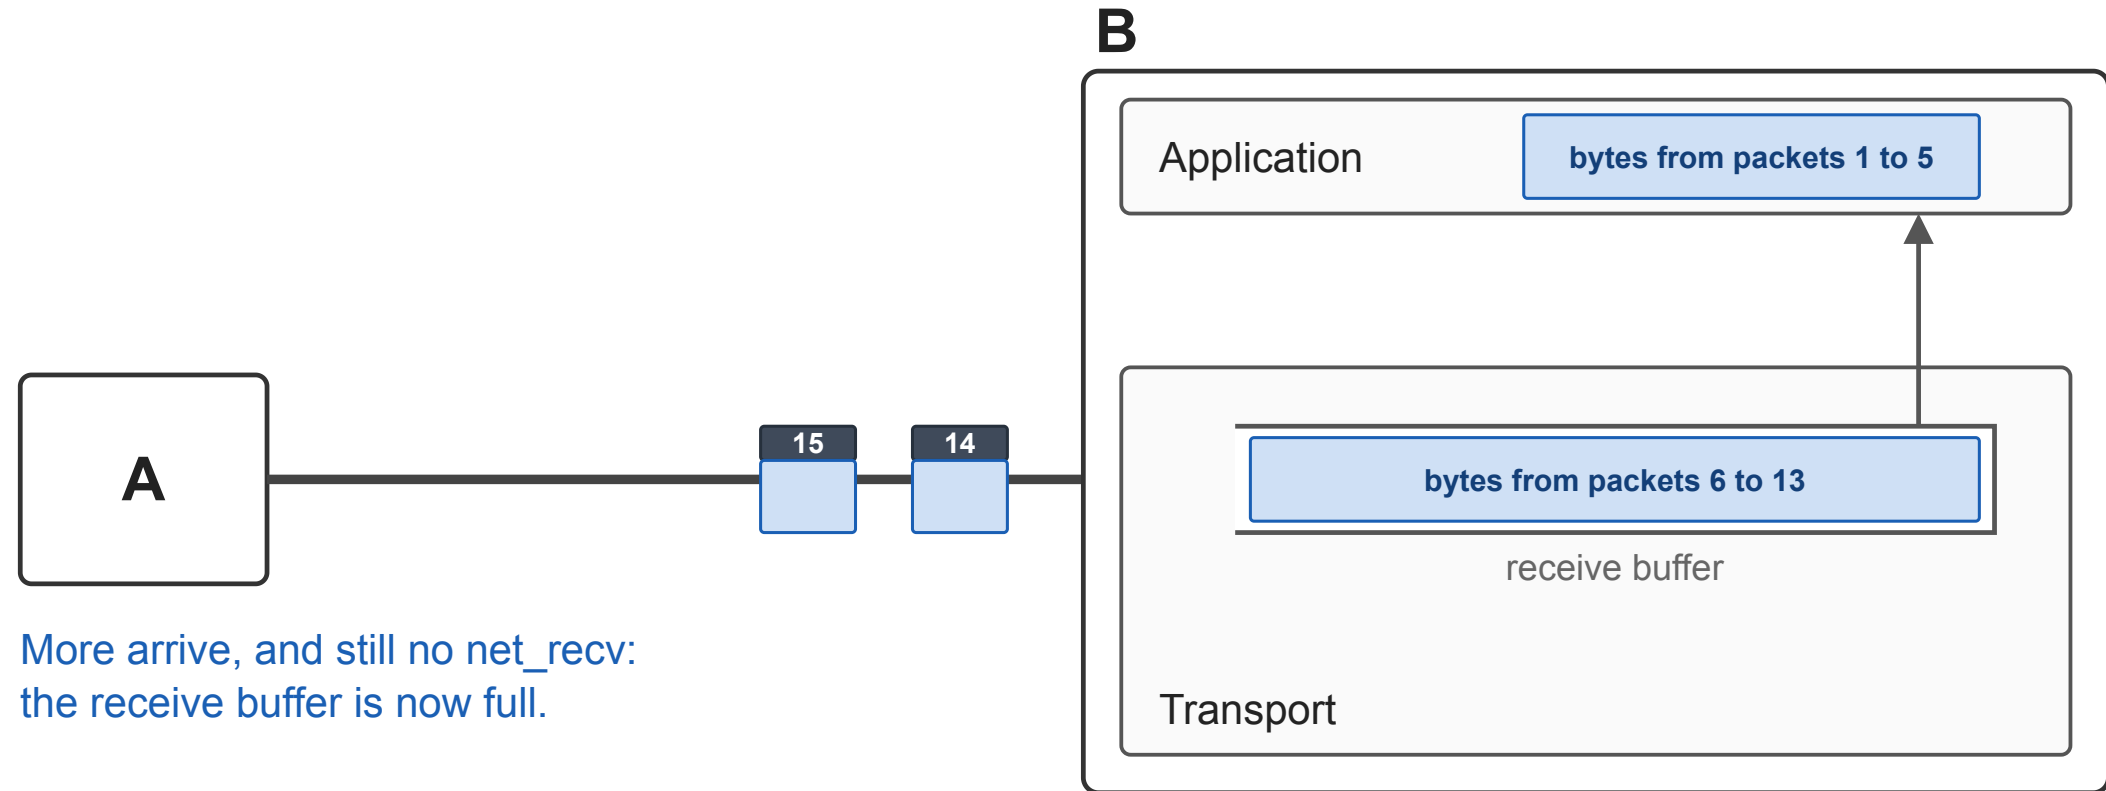

More arrive, and still no `net_rcv`:
the receive buffer is now full.

“Overwhelming” the receiver

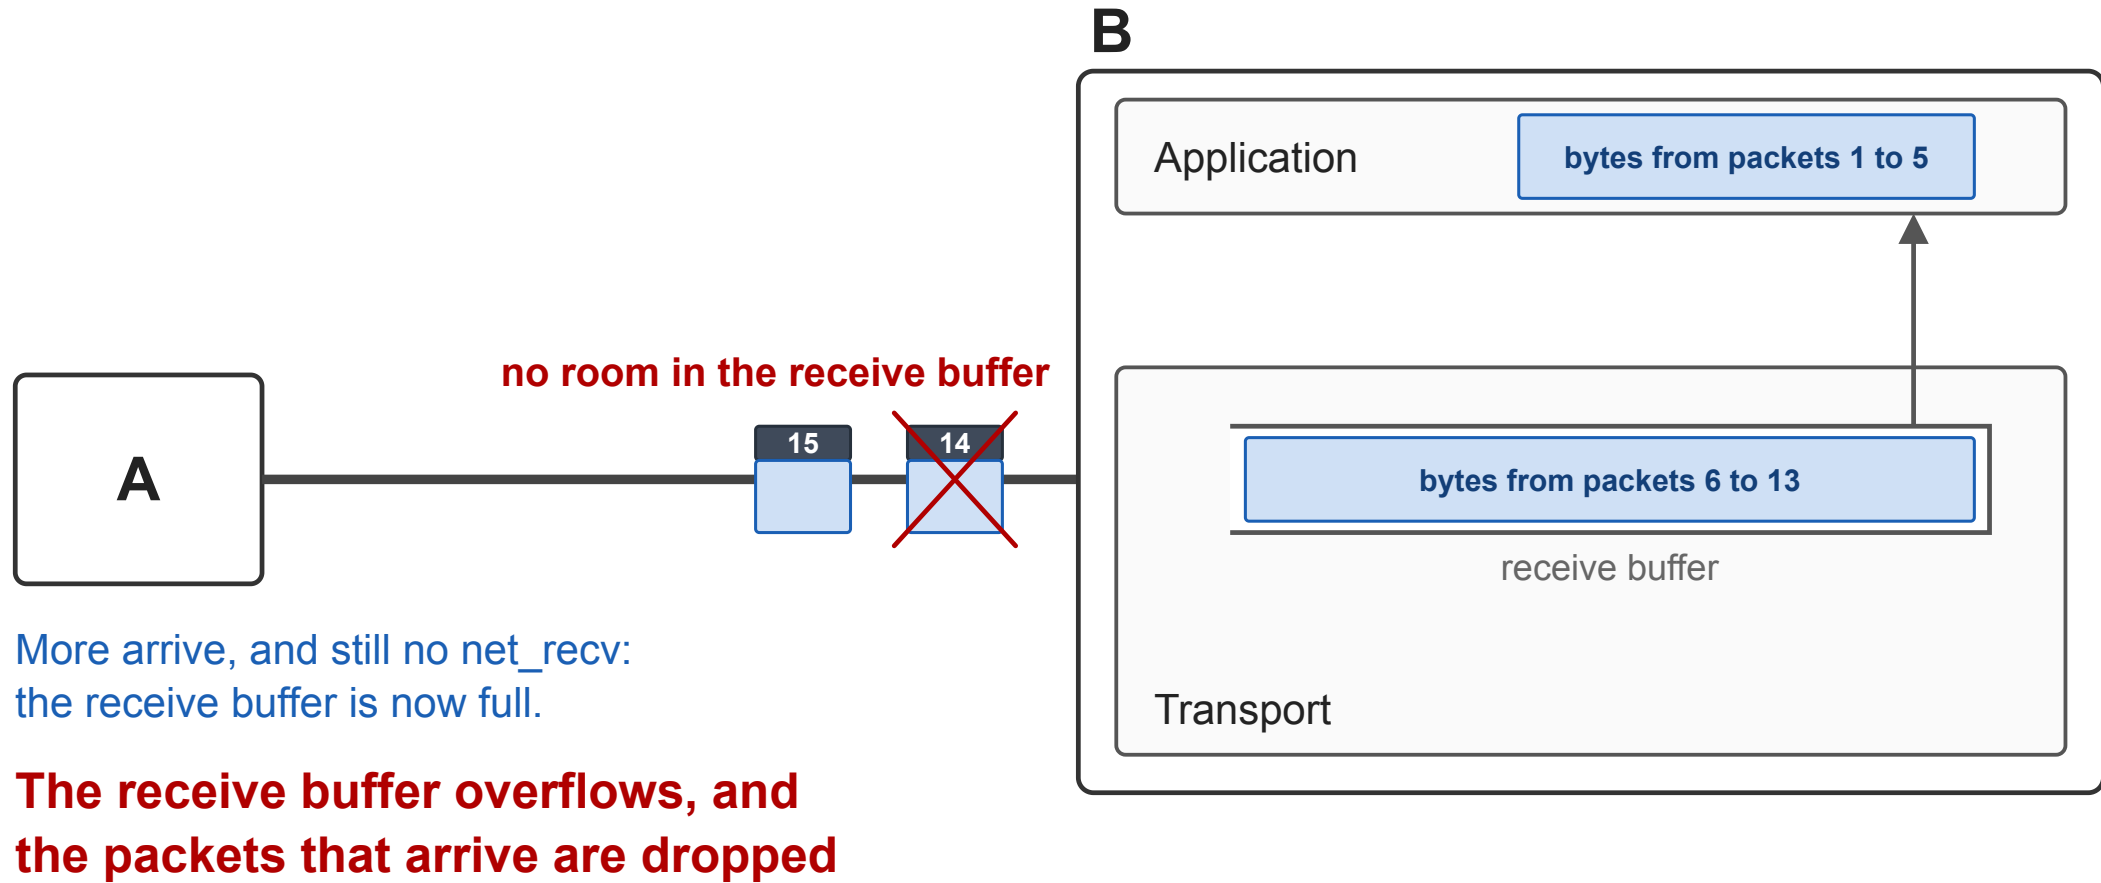


Flow control

Making sure the sender never sends more data than the receiver has room for.


One mechanism to implement flow control in the transport layer is using a sliding window.

A sliding window over the send buffer

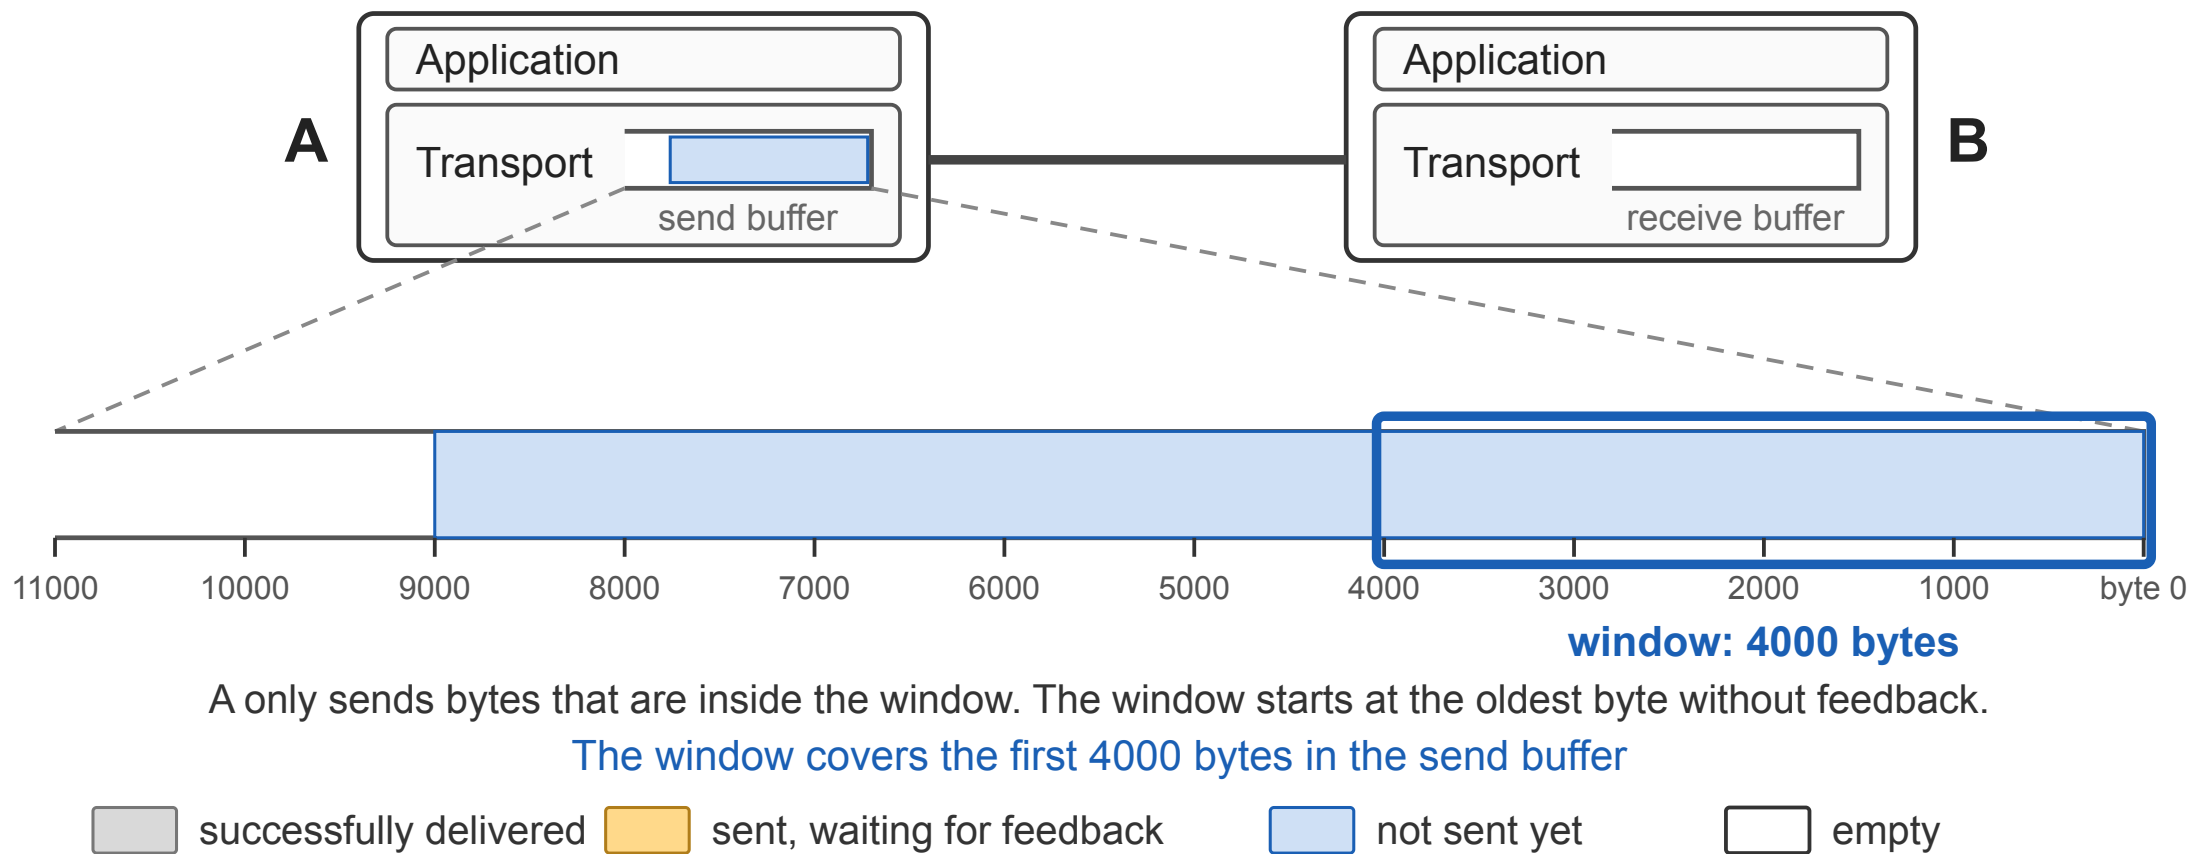

A only sends bytes that are inside the window. The window starts at the oldest byte without feedback.
The window covers the first 4000 bytes in the send buffer

A sliding window over the send buffer

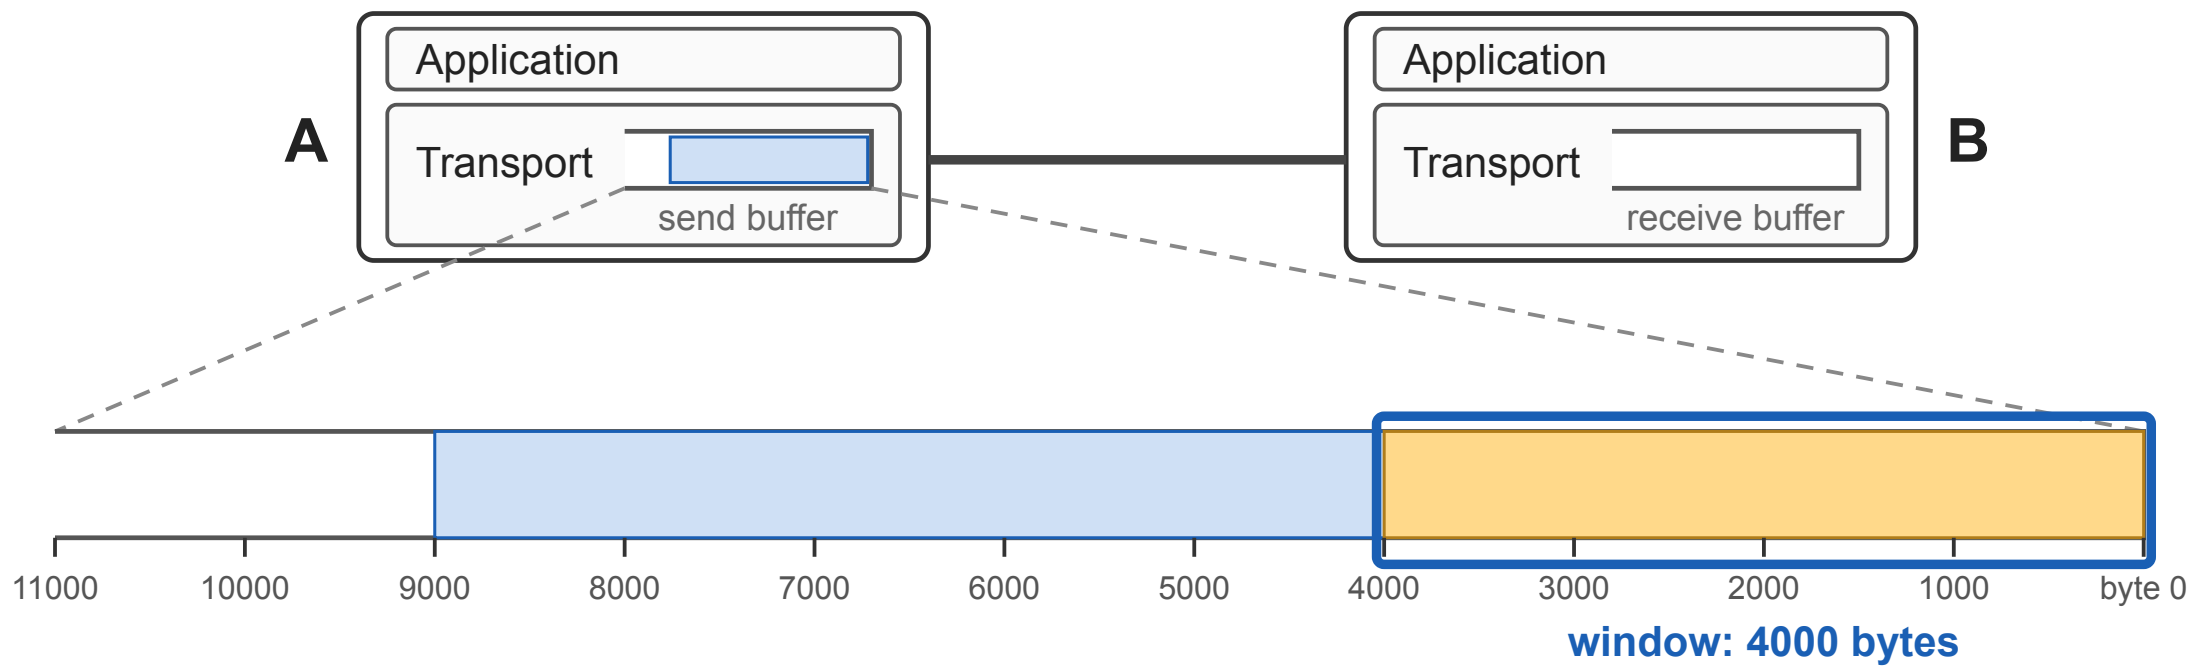


A only sends bytes that are inside the window. The window starts at the oldest byte without feedback.

A sends the bytes in the window, as four packets of 1000 bytes, then has to wait

- successfully delivered
- sent, waiting for feedback
- not sent yet
- empty

A sliding window over the send buffer

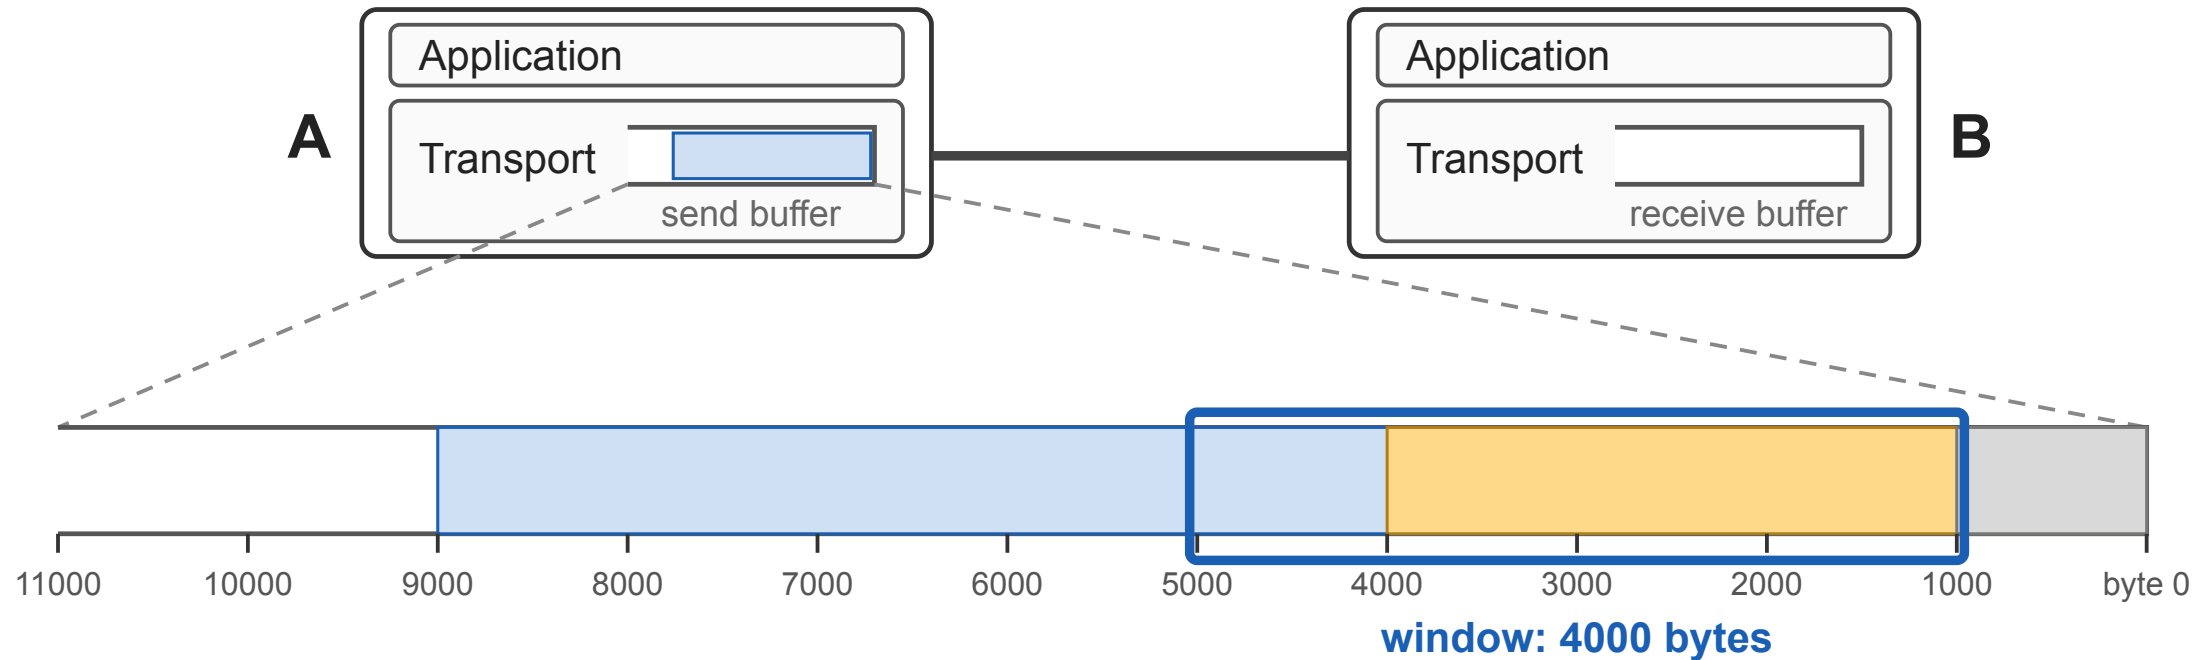


A only sends bytes that are inside the window. The window starts at the oldest byte without feedback.


Feedback for the first packet arrives: the window slides by 1000 bytes

 successfully delivered  sent, waiting for feedback  not sent yet  empty

A sliding window over the send buffer

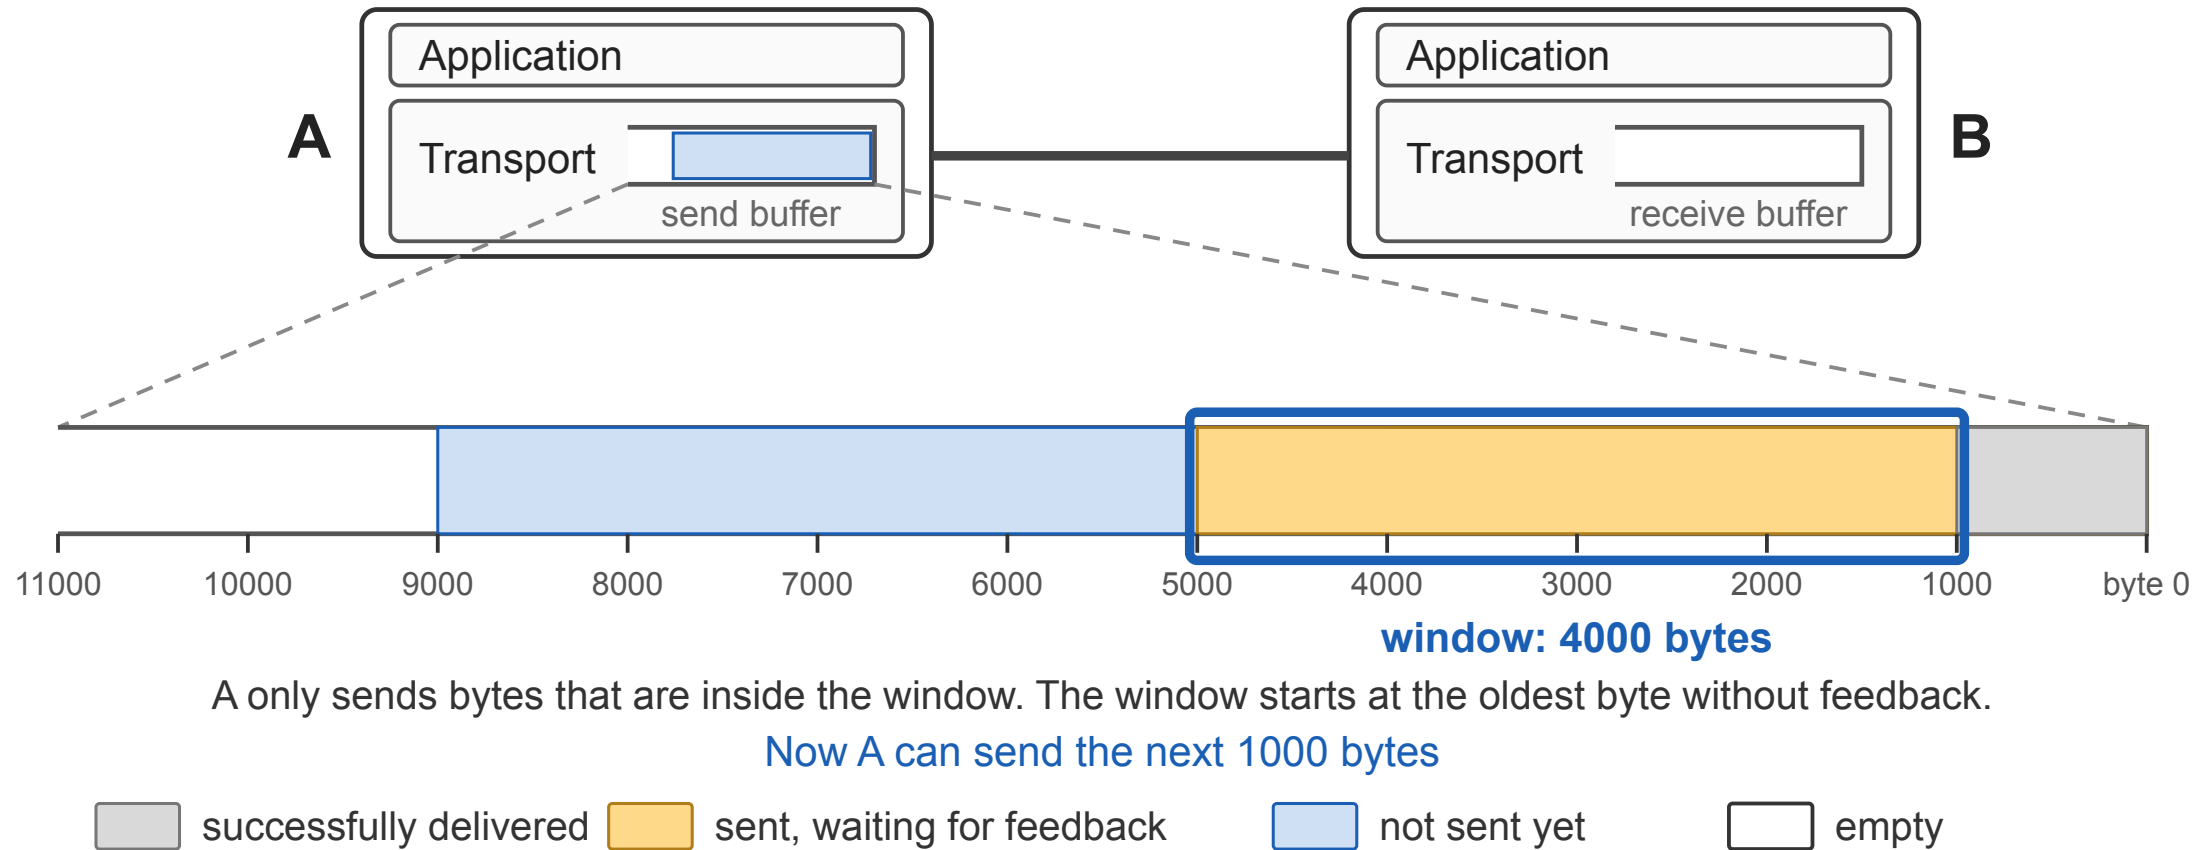

A sliding window over the send buffer

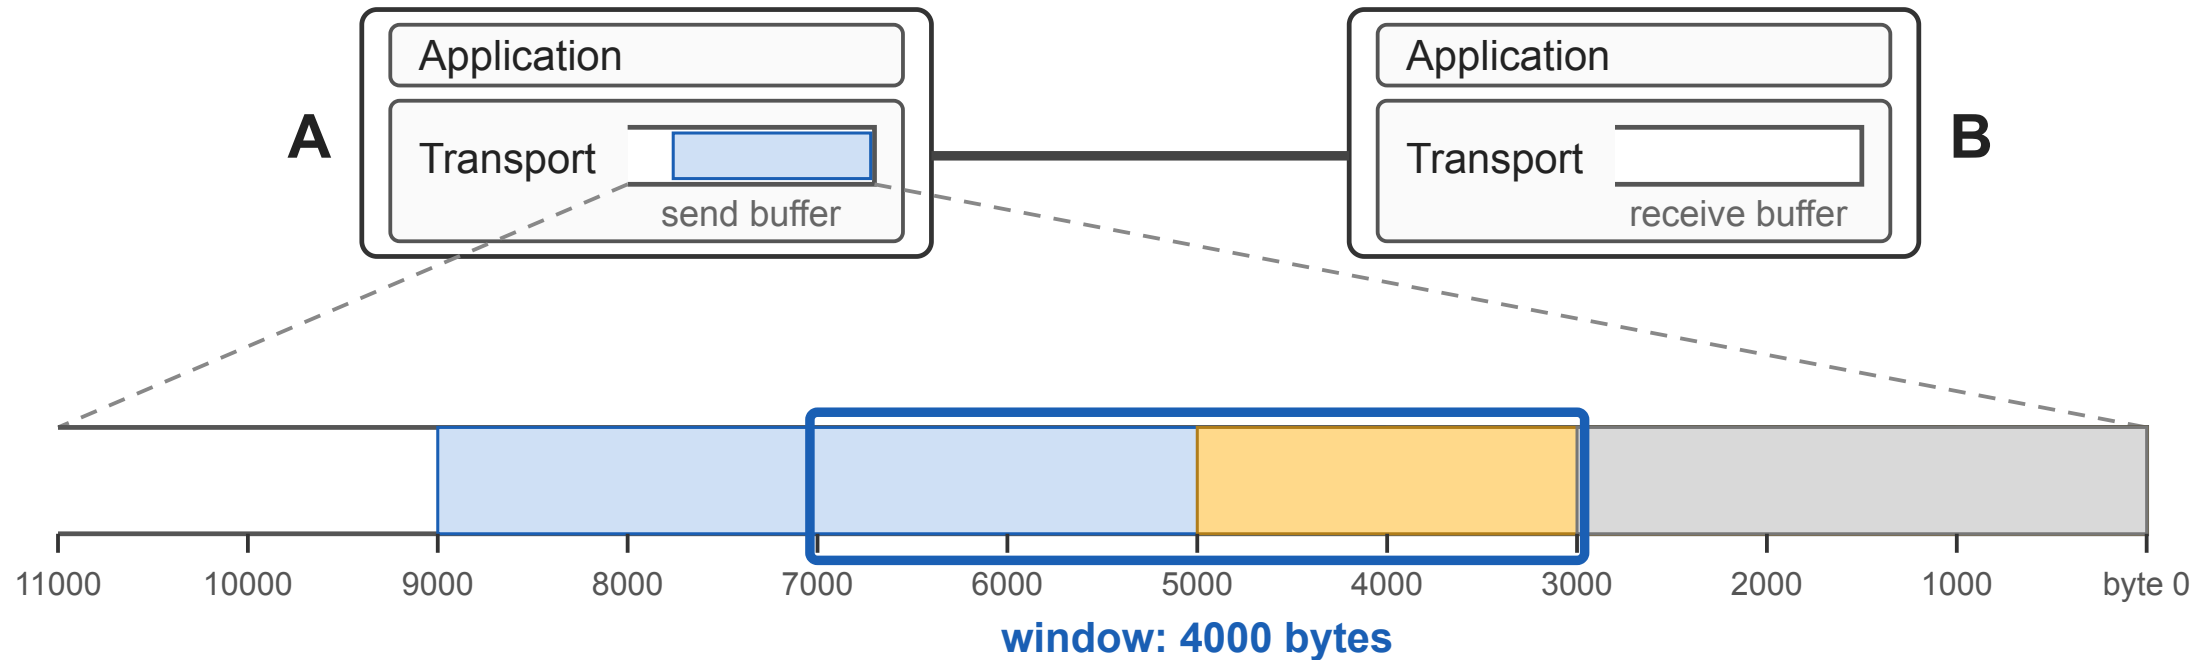


A only sends bytes that are inside the window. The window starts at the oldest byte without feedback.

Feedback for the next two packets arrives: the window slides by 2000 bytes

 successfully delivered  sent, waiting for feedback  not sent yet  empty

A sliding window over the send buffer

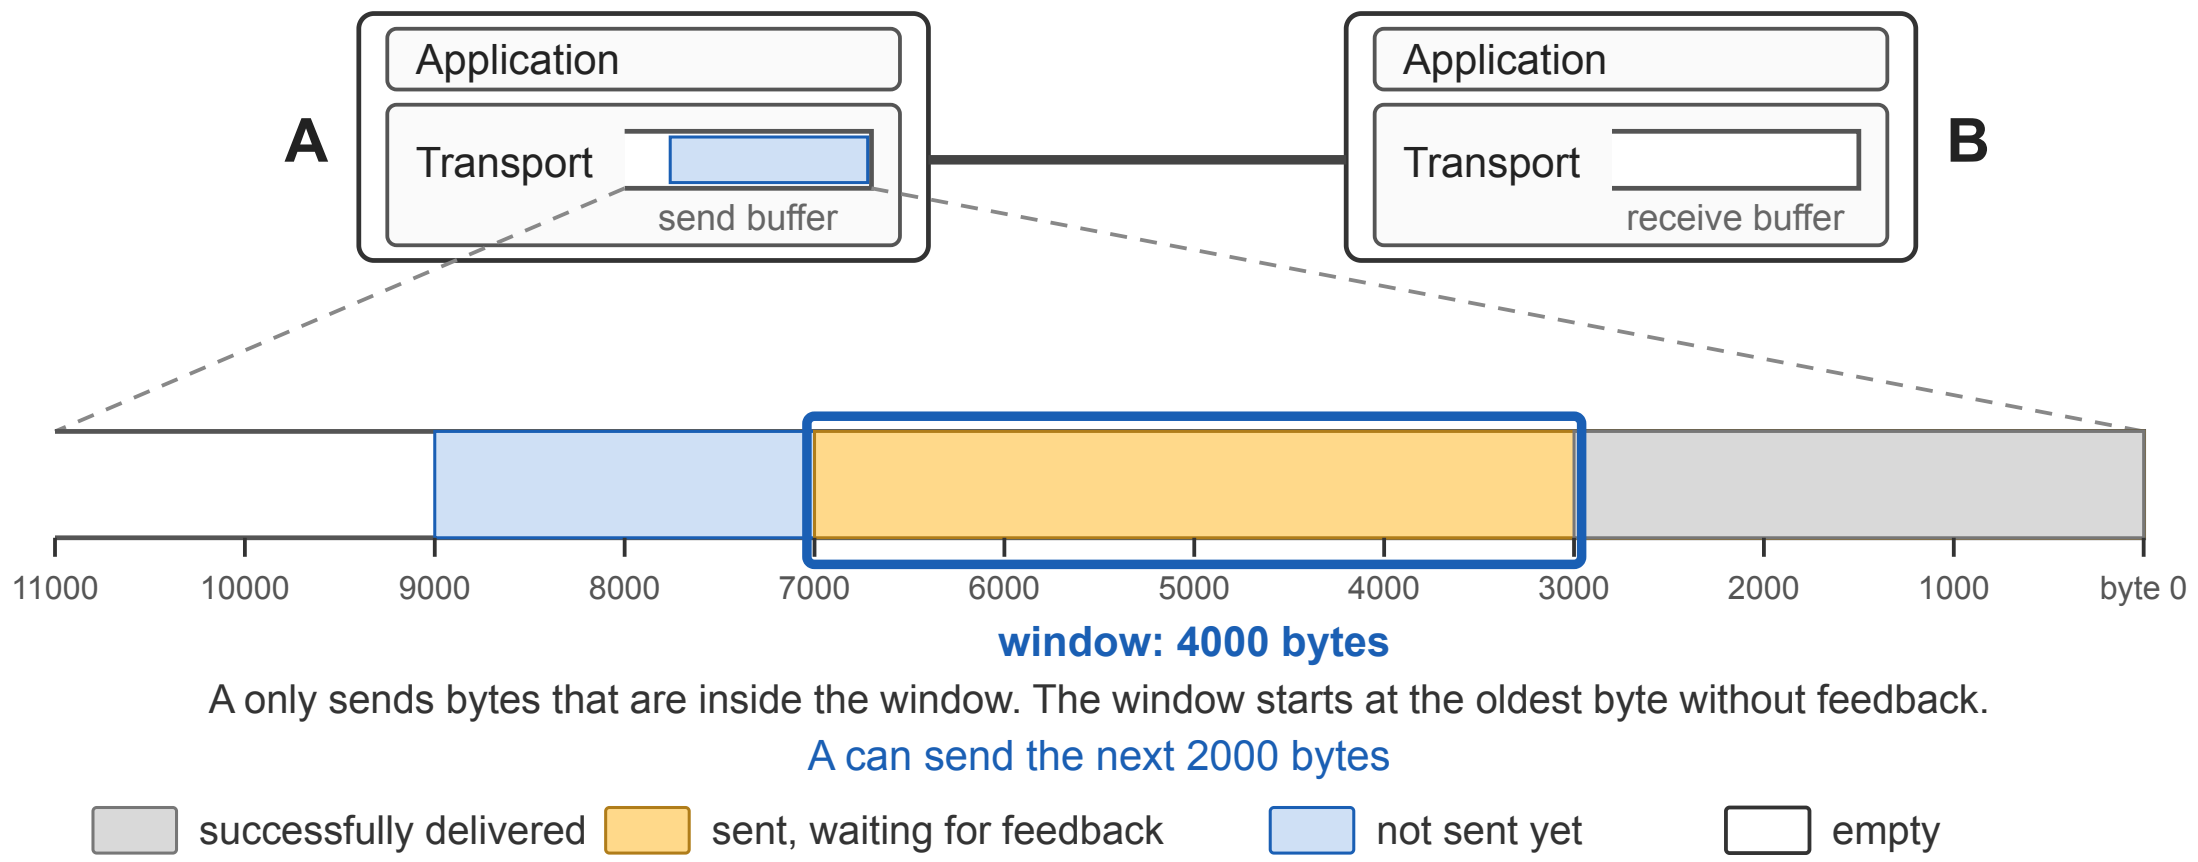

Flow control, with a window

A's window should never be larger than the room left in B's receive buffer.

Flow control, with a window

A's window should never be larger than the room left in B's receive buffer.

How can A find out how much room B has?

The feedback, with a receive window

metadata	Channel ID
	Segment ID
	feedback_bit
	Checksum


The feedback, with a receive window

metadata	Channel ID
	Segment ID
	feedback_bit
	Checksum

The feedback, with a receive window

metadata	Channel ID
	Segment ID
	feedback_bit
	Checksum

Flow control, step by step

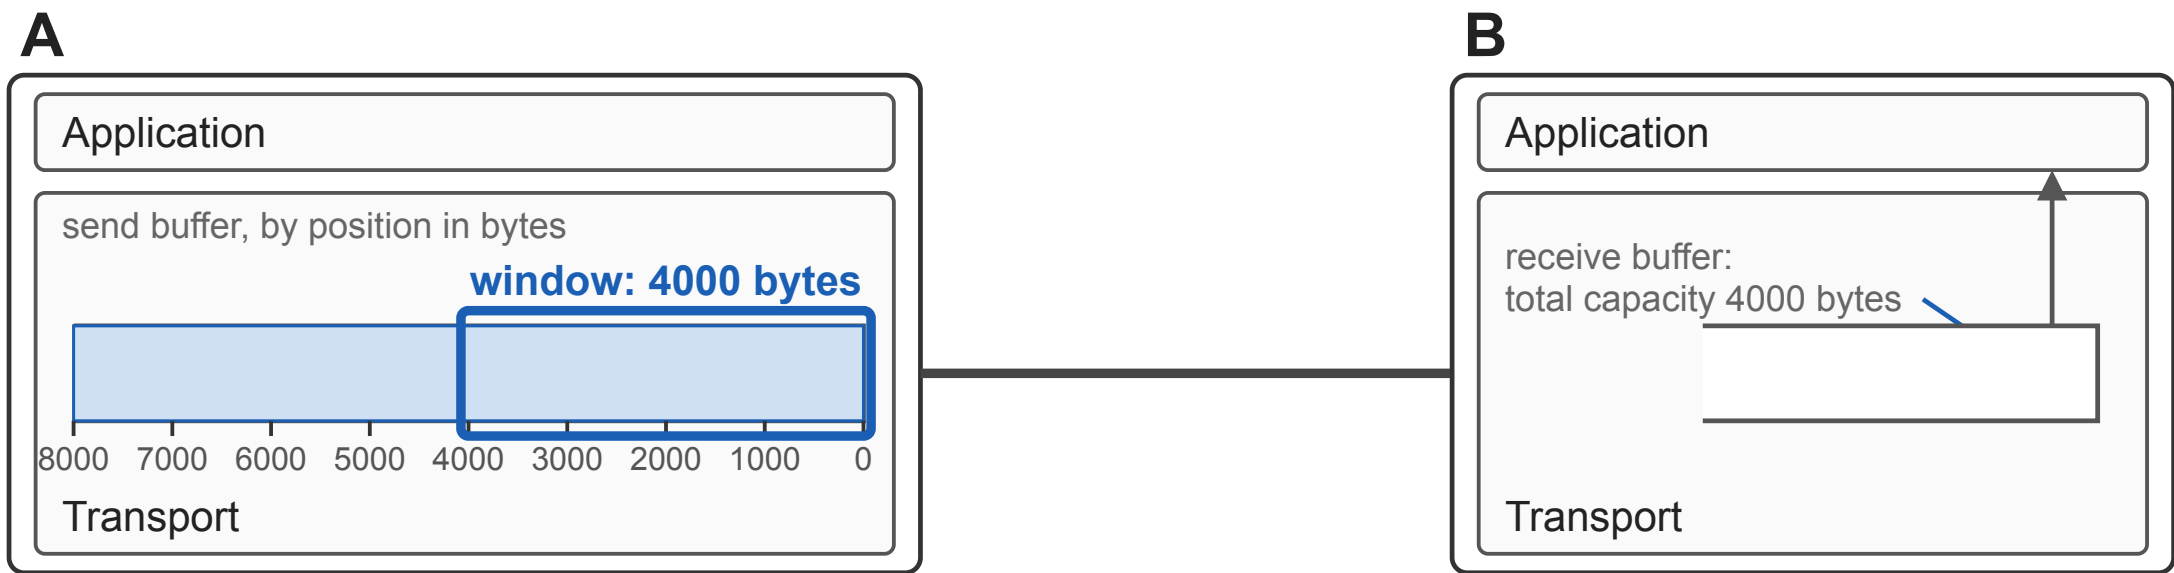

B's receive buffer is empty, and B has told A: receive window = 4000.
A's window is 4000 bytes.



successfully delivered




sent, waiting for feedback



not sent yet


Flow control, step by step

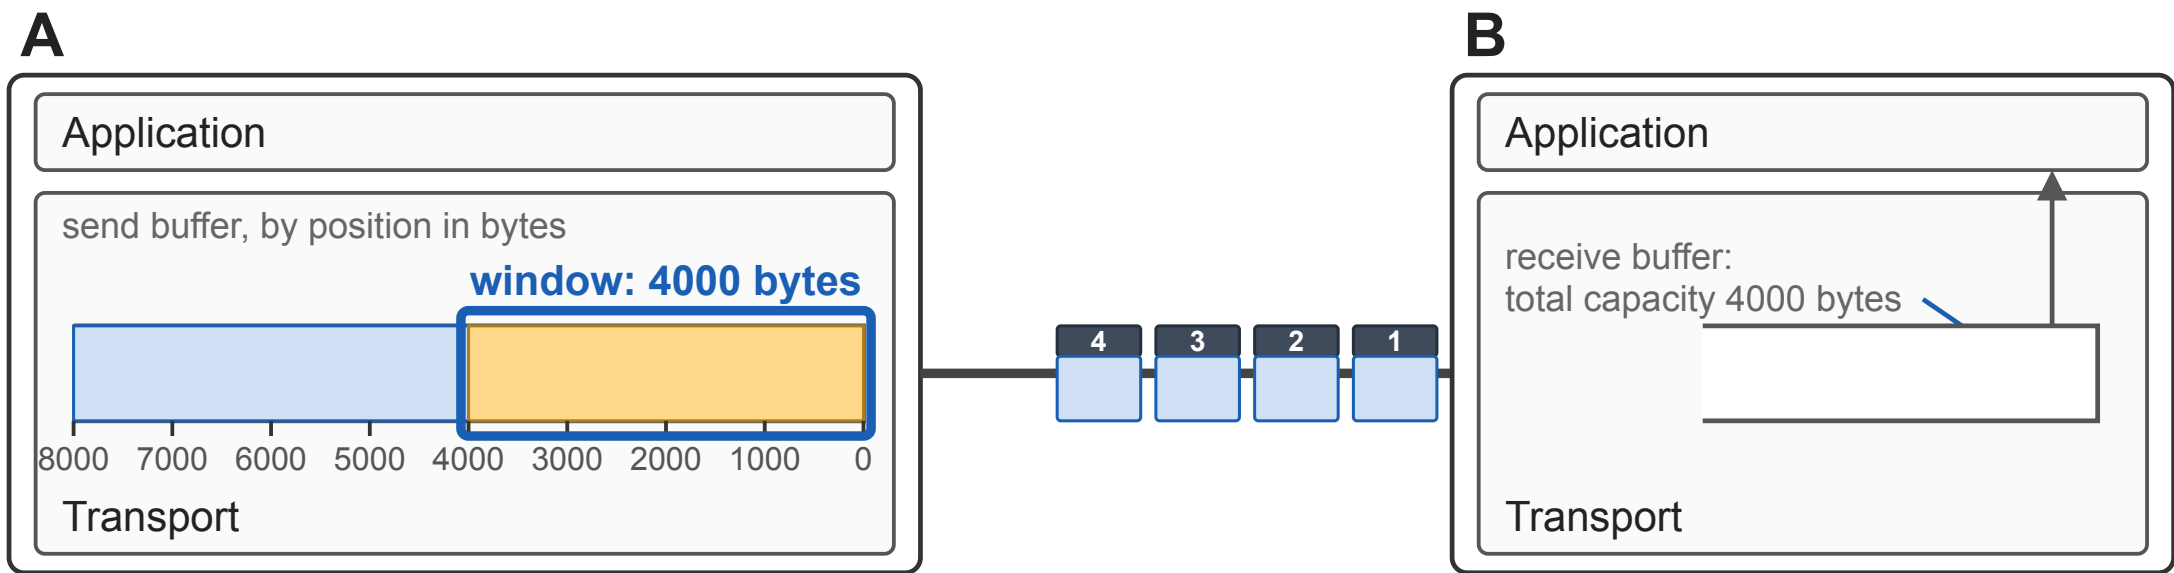

A sends the 4000 bytes in its window, as packets 1 to 4.

 successfully delivered  sent, waiting for feedback  not sent yet


Flow control, step by step

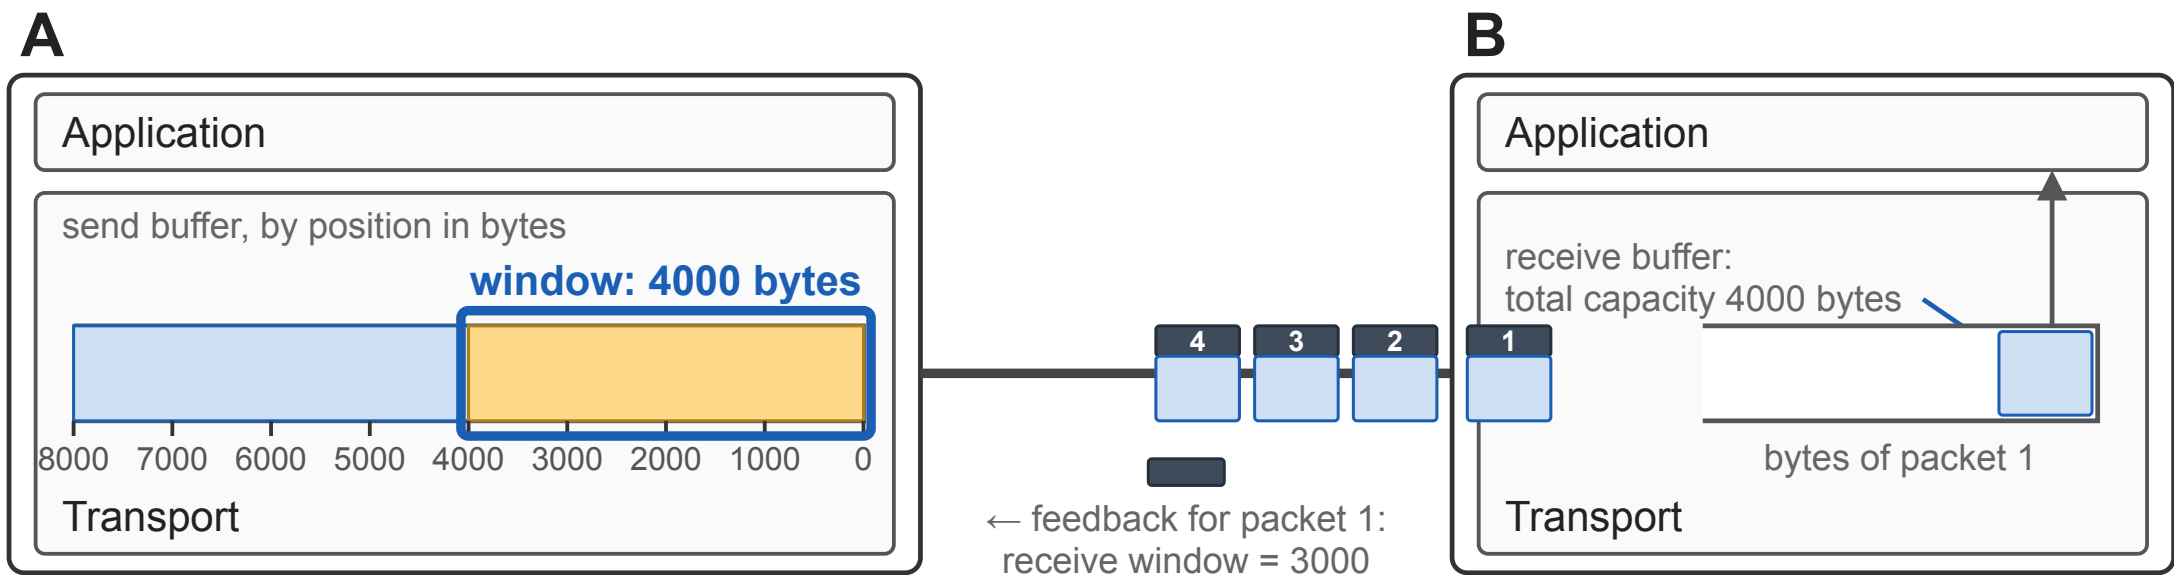

Packet 1 arrives. B has space left for 3000 more bytes.
It specifies that in its feedback for packet 1: receive window = 3000.

successfully delivered sent, waiting for feedback not sent yet


Flow control, step by step

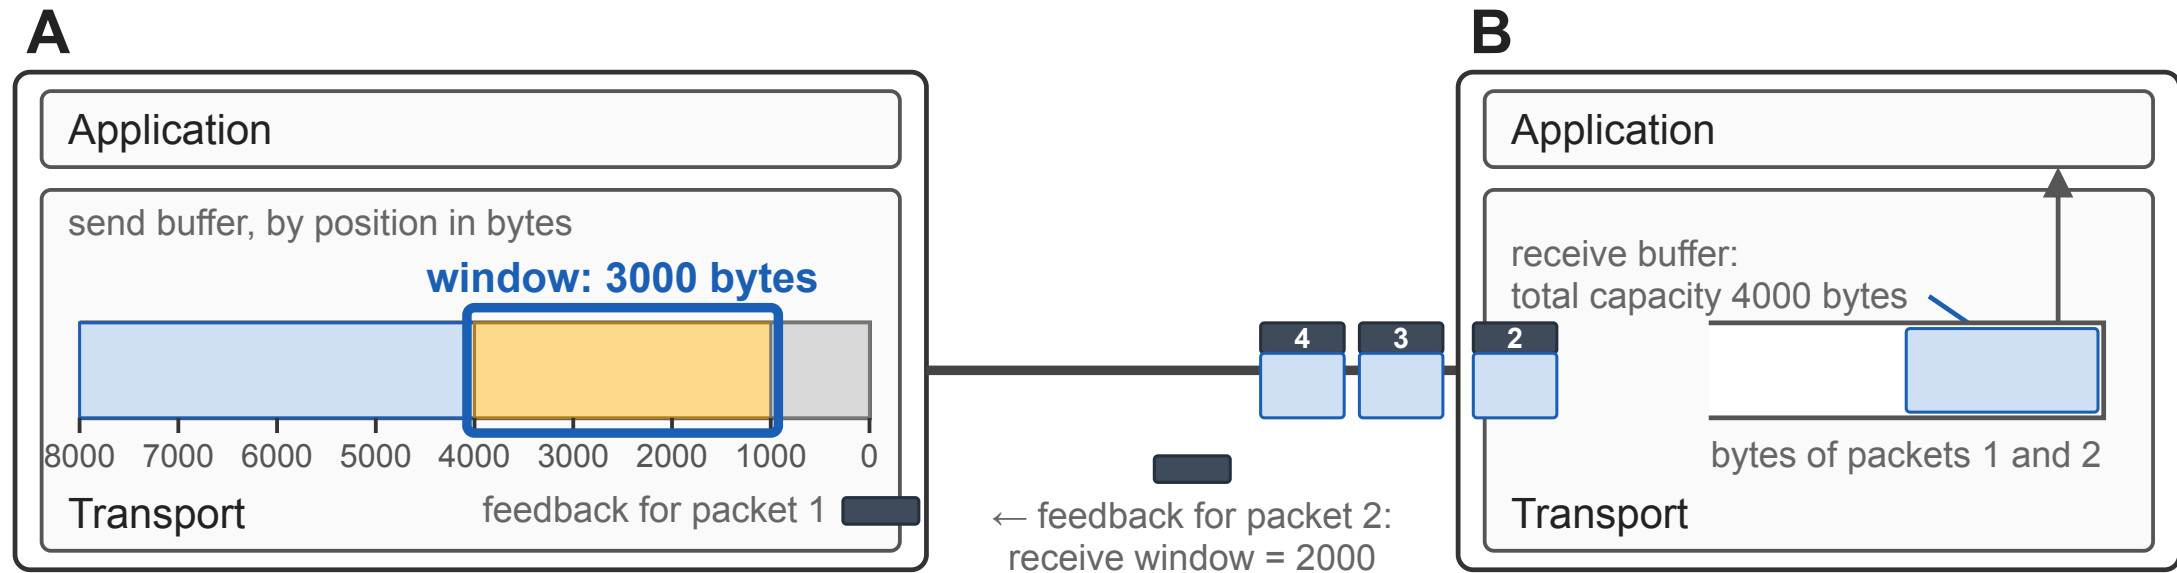

The feedback for packet 1 reaches A. A's window now starts at byte 1000 and is 3000 bytes long. All of it is sent already, so A sends nothing new. Meanwhile packet 2 arrives at B: receive window = 2000.

Grey box: successfully delivered Yellow box: sent, waiting for feedback Blue box: not sent yet

Flow control, step by step

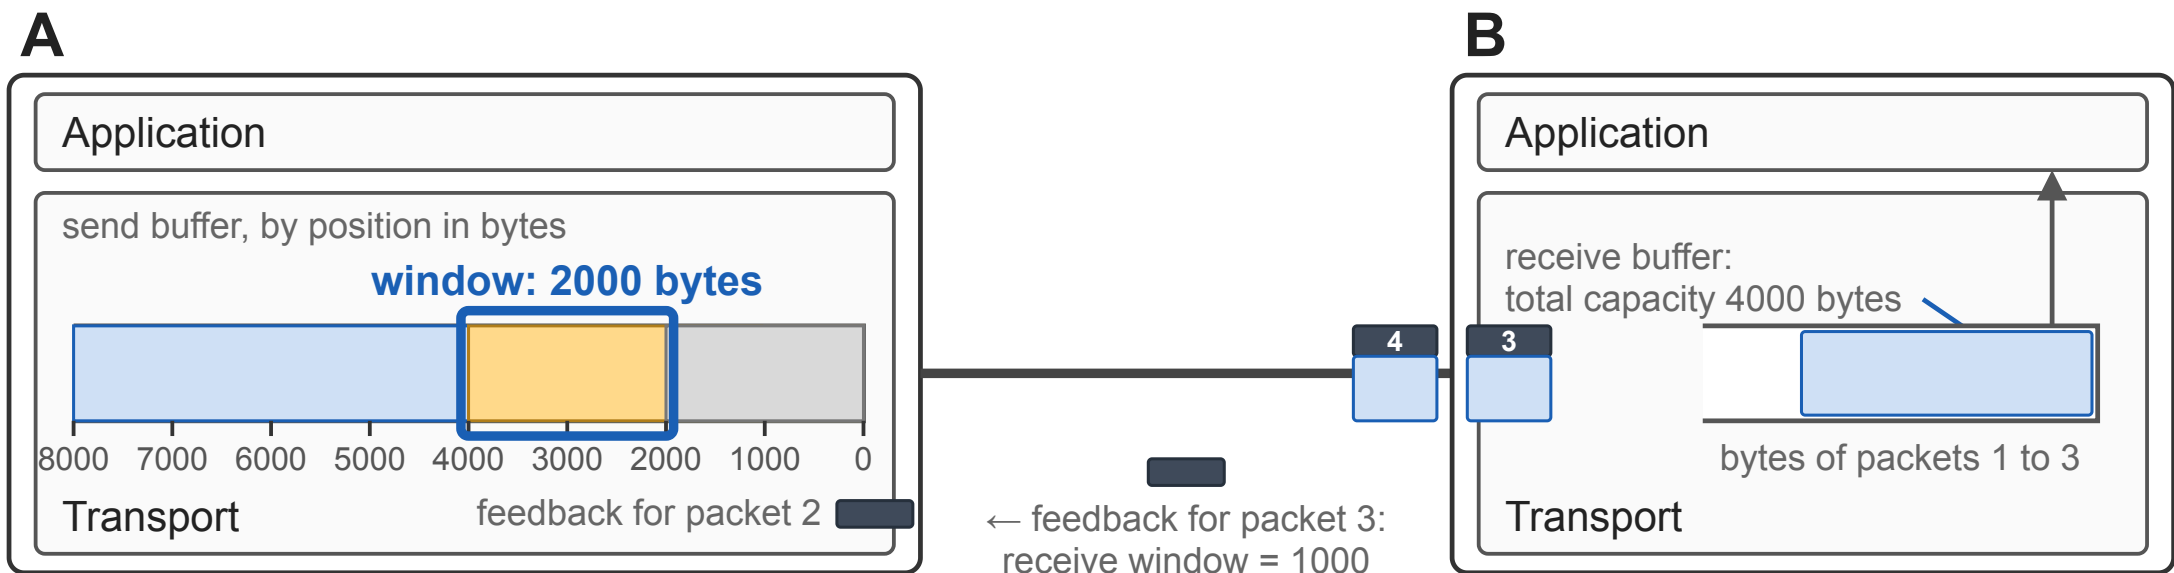

The feedback for packet 2 reaches A: A's window now starts at byte 2000 and is 2000 bytes long.
Packet 3 arrives at B, leaving space for 1000 bytes: receive window = 1000.



successfully delivered




sent, waiting for feedback



not sent yet


Flow control, step by step

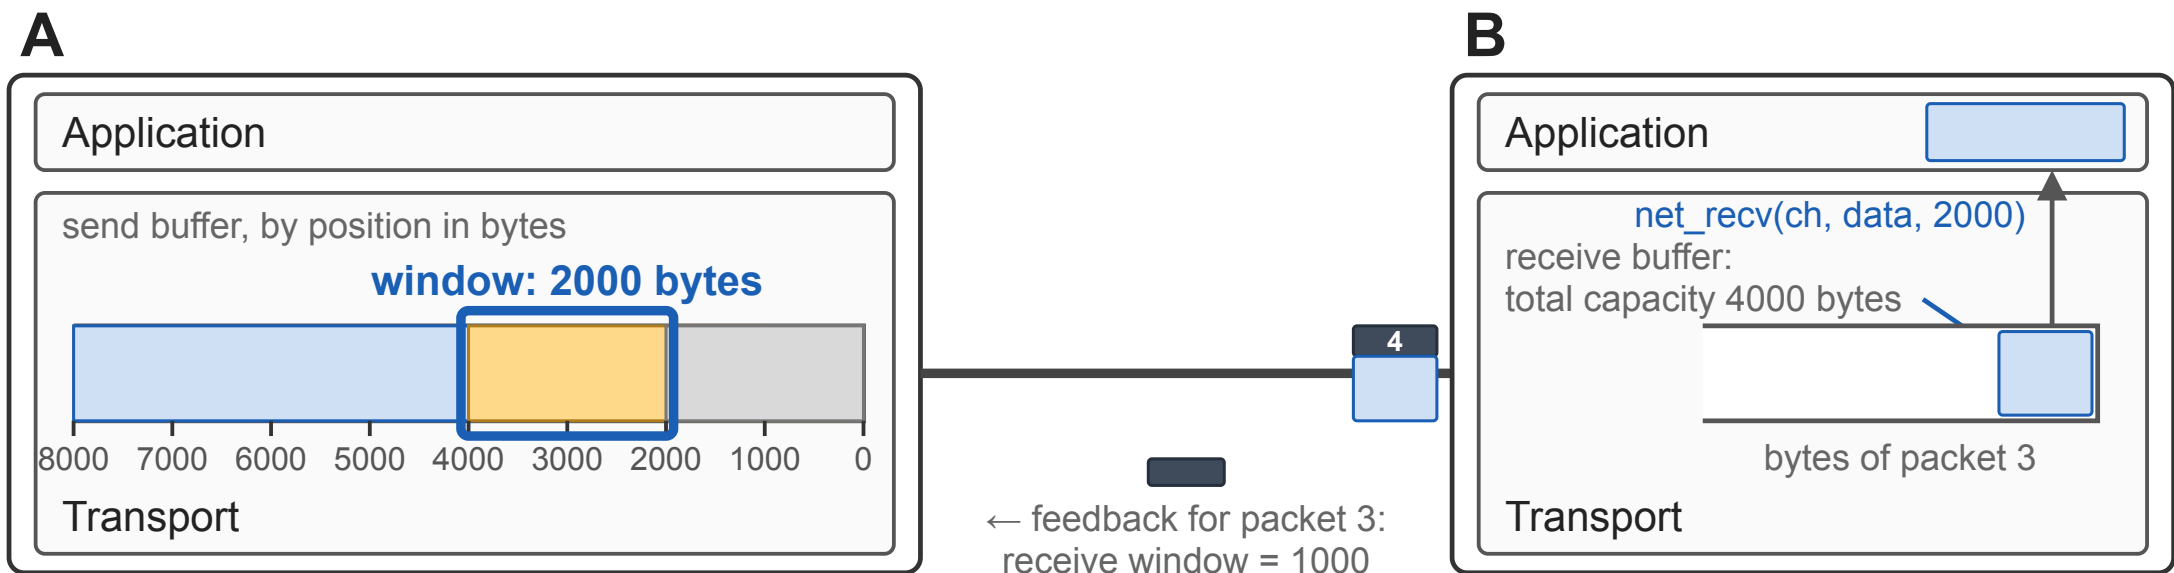

The application at B calls `net_rcv` for 2000 bytes:
the bytes of packets 1 and 2 leave the receive buffer.

 successfully delivered  sent, waiting for feedback  not sent yet

Flow control, step by step

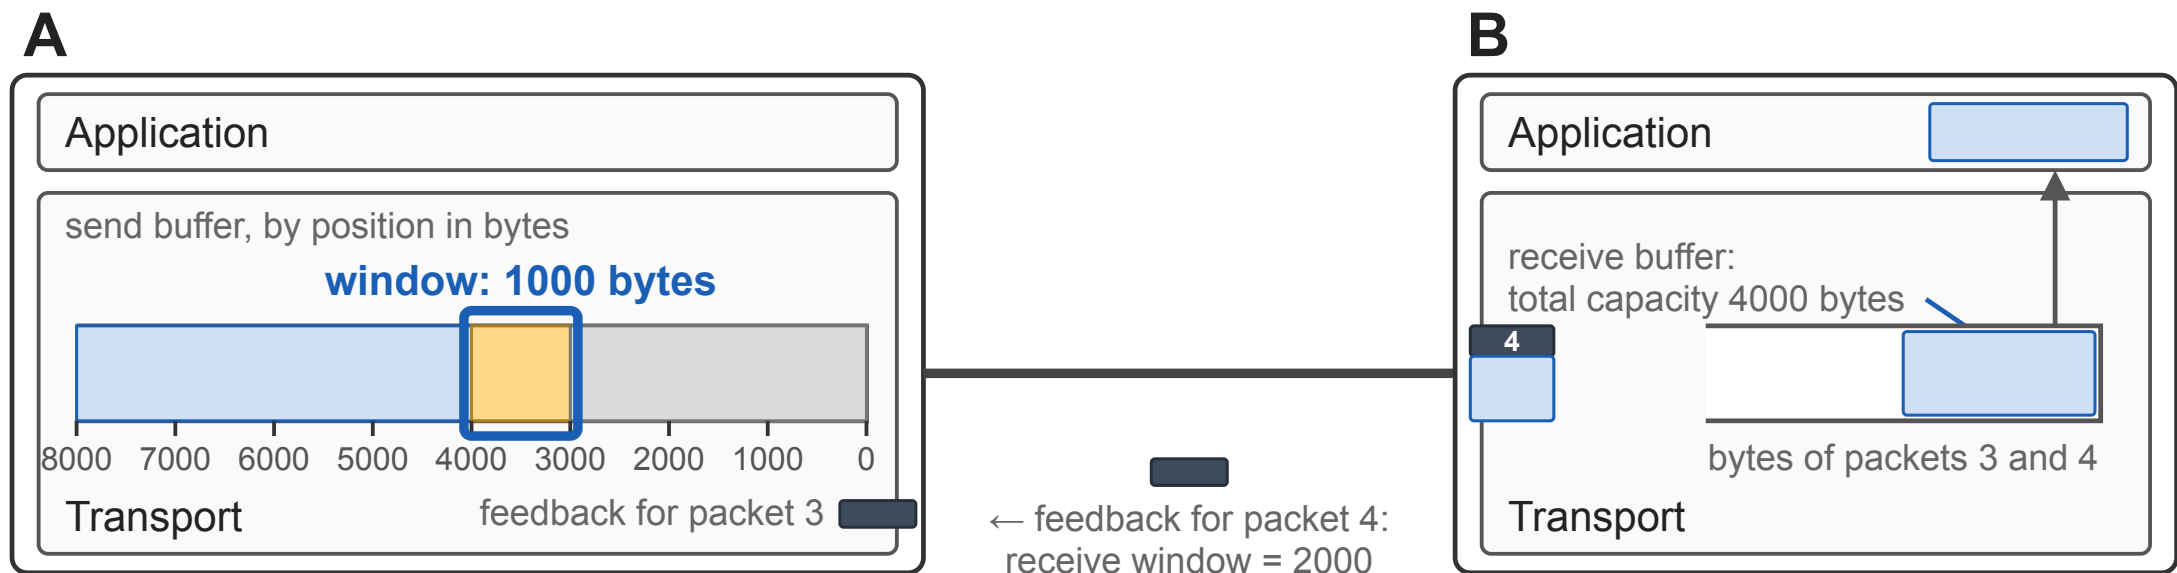

Packet 4 arrives. 2000 bytes are waiting in B's buffer: space left for 2000 bytes, receive window = 2000.
At A, the feedback for packet 3 results in a window of 1000 bytes, starting from byte 3000.



successfully delivered




sent, waiting for feedback



not sent yet


Flow control, step by step

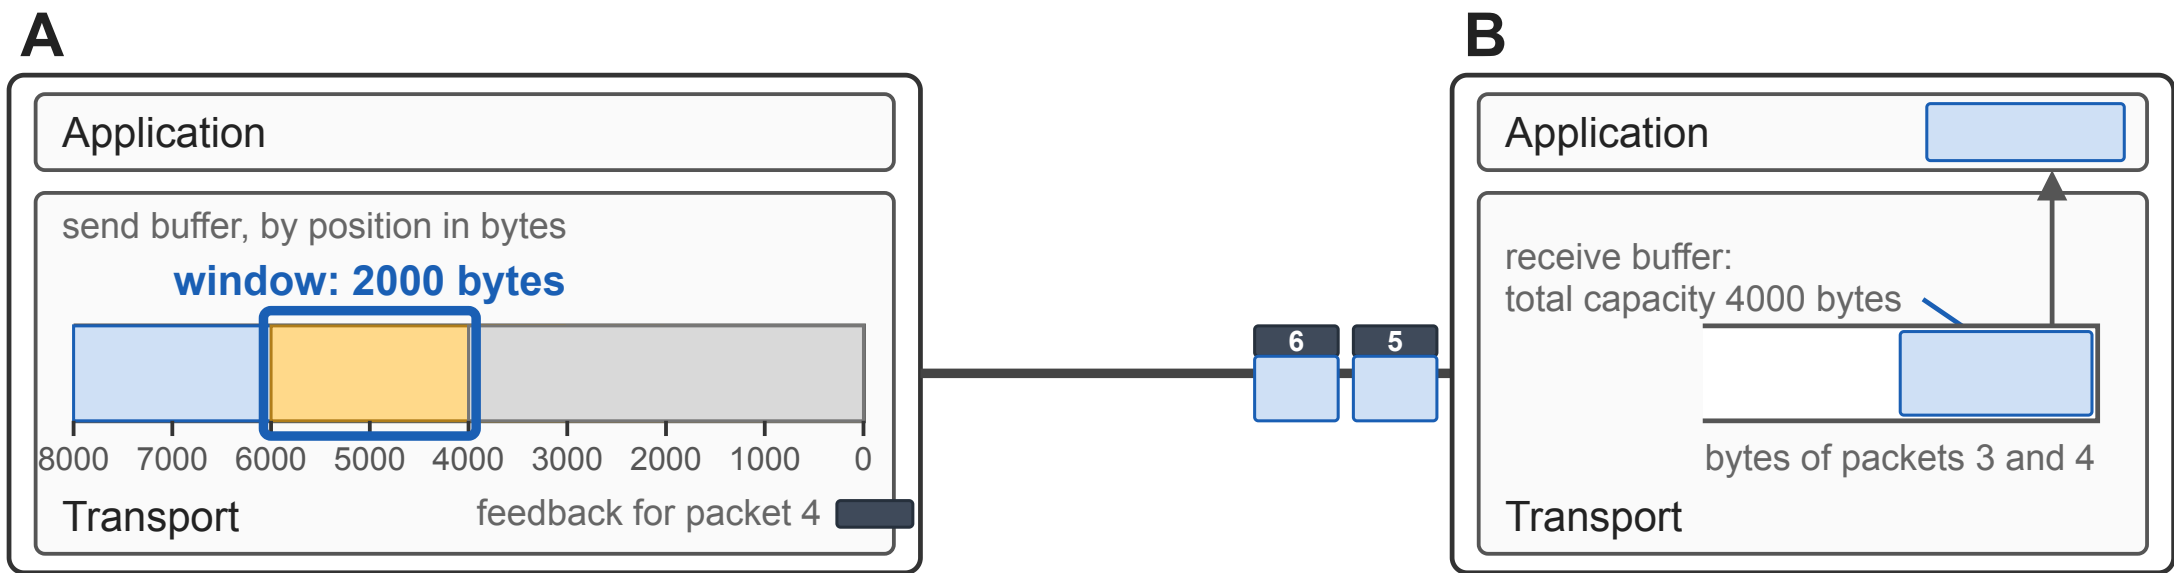

The feedback for packet 4 reaches A. A's window now starts from byte 4000 and is 2000 bytes long:
A sends packets 5 and 6.

 successfully delivered  sent, waiting for feedback  not sent yet


Flow control, step by step

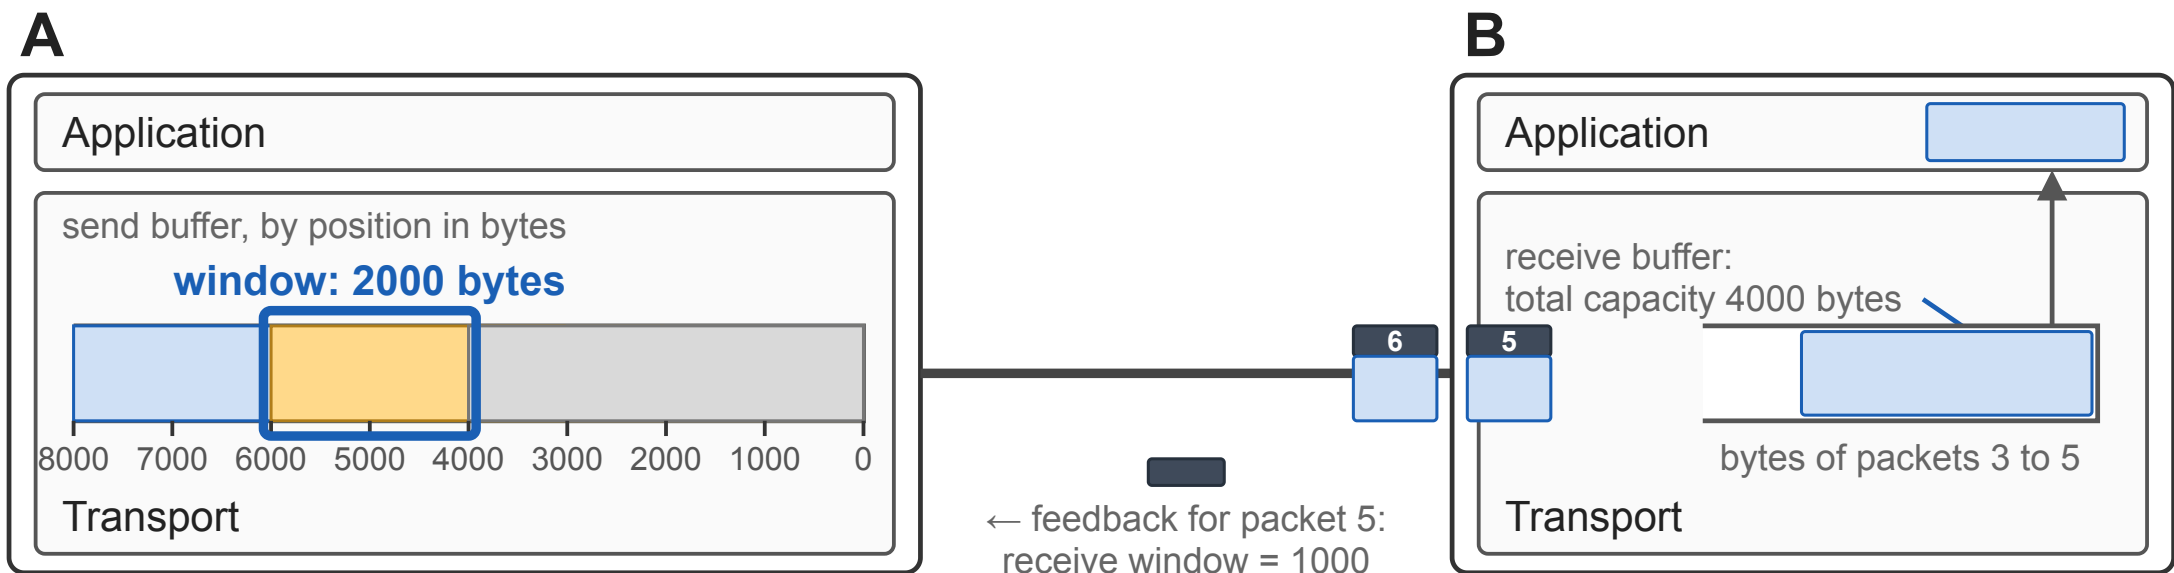

Packet 5 arrives, and the application has not called `net_recv` again:
space left for 1000 bytes, receive window = 1000.

 successfully delivered  sent, waiting for feedback  not sent yet


Flow control, step by step

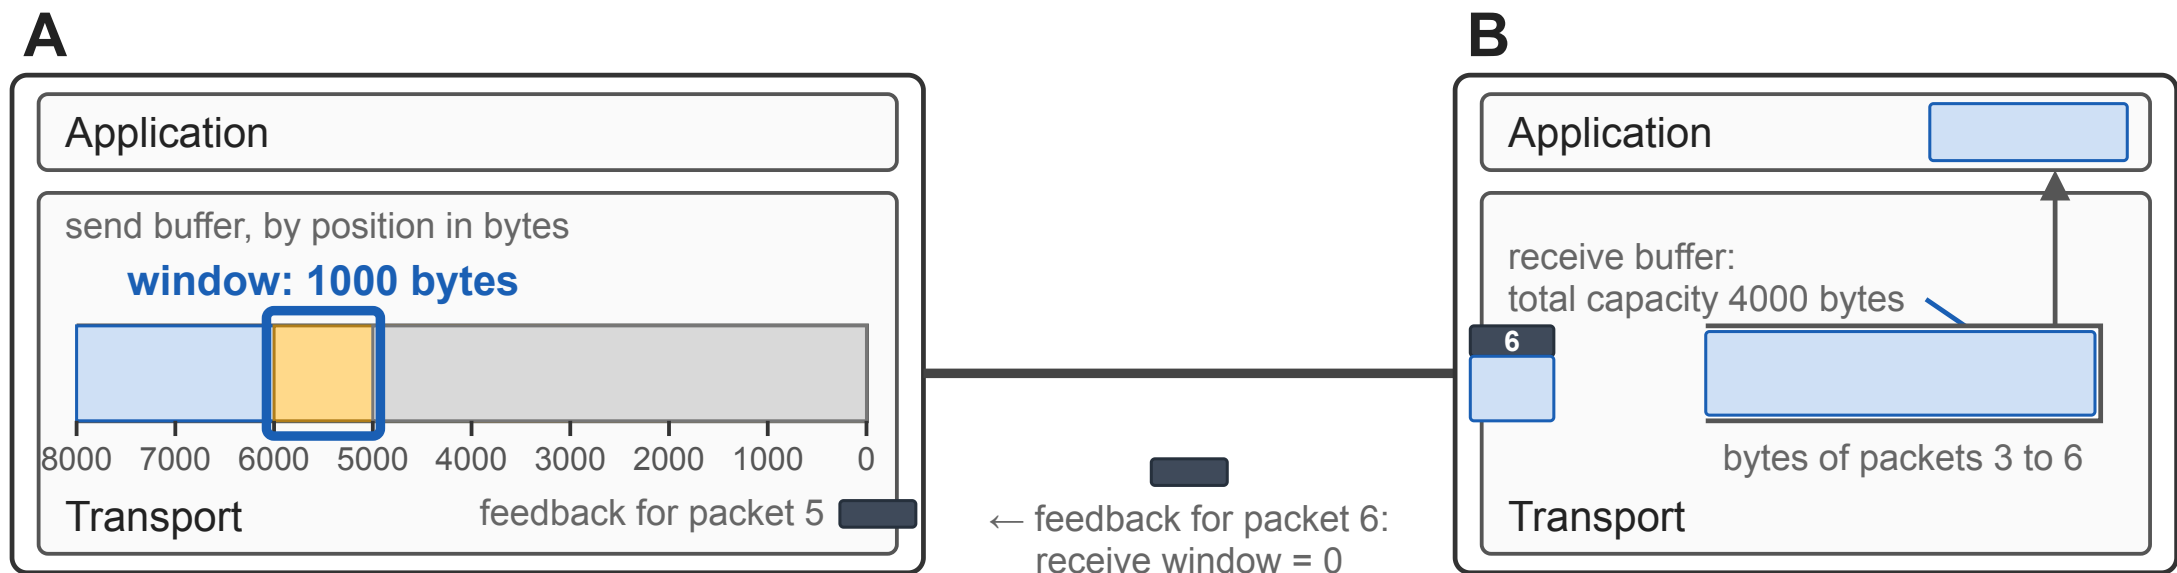

Packet 6 arrives and fills the buffer: no space left, receive window = 0.
At A, the feedback for packet 5 results in a window of 1000 bytes, starting from byte 5000.

 successfully delivered  sent, waiting for feedback  not sent yet

Flow control, step by step

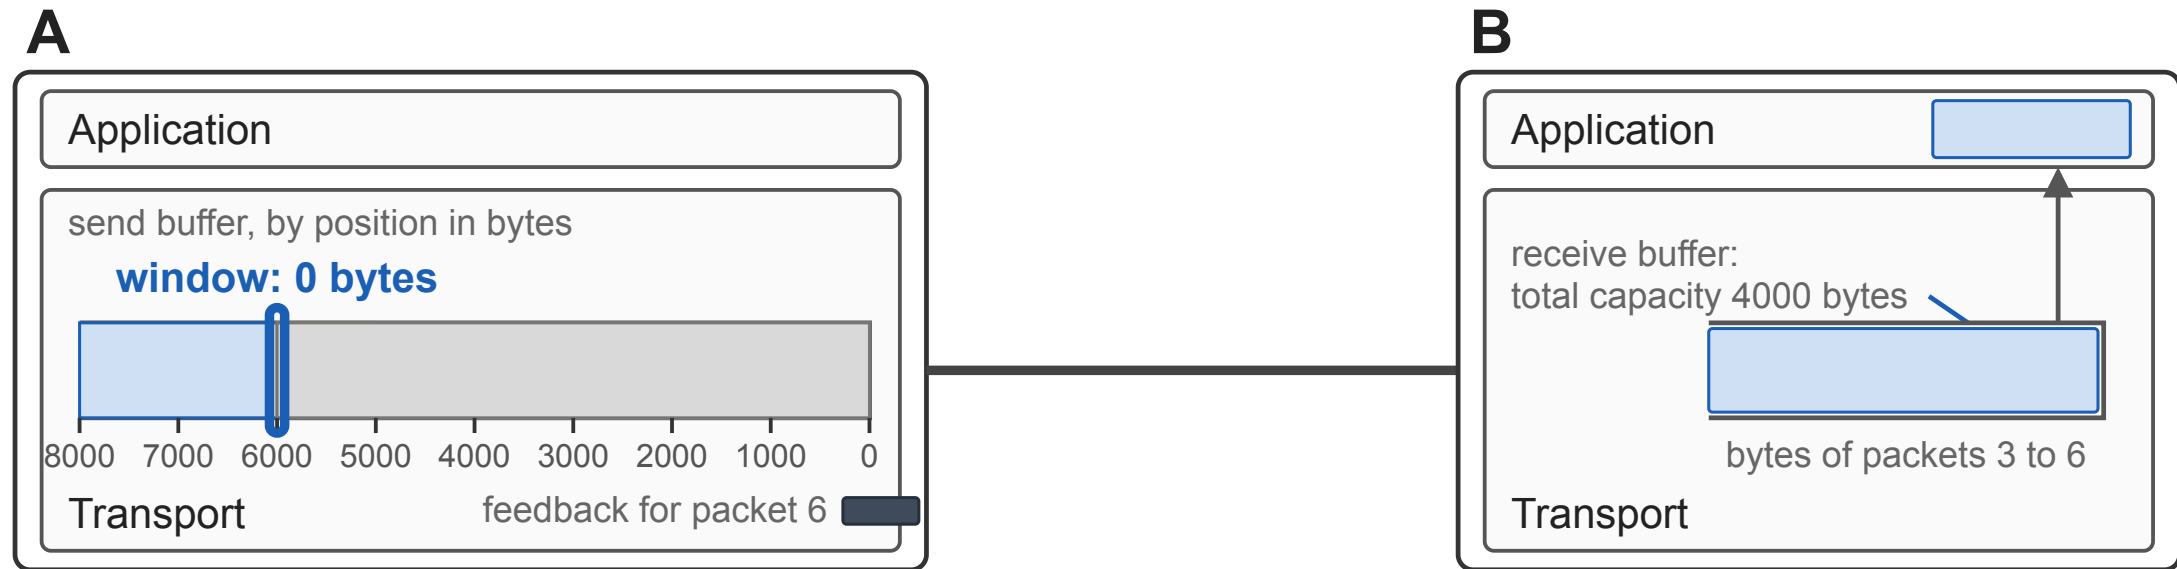

The feedback for packet 6 reaches A. A's window is now 0 bytes: A sends nothing until B has room again.

The receive buffer never overflows, and nothing is dropped.

 successfully delivered  sent, waiting for feedback  not sent yet

What is a good batch size?

- **Too small:** we are underutilizing the network, and it takes longer to get the data delivered
- **Too big:**
 - The network is shared. If everyone sends everything they have at full speed, it will create congestion that can result in increasing drops and delays
 - The sender may “overwhelm” the receiver

What is a good batch size?

- **Too small:** we are underutilizing the network, and it takes longer to get the data delivered
- **Too big:**
 - The network is shared. If everyone sends everything they have at full speed, it will create congestion that can result in increasing drops and delays
 - The sender may “overwhelm” the receiver

✓ flow control with a sliding window

What is a good batch size?

Part 2

- **Too small:** we are underutilizing the network, and it takes longer to get the data delivered
- **Too big:**
 - The network is shared. If everyone sends everything they have at full speed, it will create congestion that can result in increasing drops and delays
 - The sender may “overwhelm” the receiver

✓ flow control with a sliding window