Doc Number: 161310G00000-00	Doc Version: 008	Date: 02-Nov-2026

Super Mushshak Engine Acceleration Manual Test

Prepar3D v5 | Rahwali Airfield (OPRW) | Manual Testing Mode

Super Mushshak Logger - ver. 1.0

Super Mushshak Engine Manual Testing Suite

Flight Test File: Super_Mushak_manual_takeoff_data_2026-11-02_10-25-04_legacy_plot.csv

ONLINE, MANUAL

Test Date: 02-Nov-2026 Test Time: 10:25:04

Initial Recorded Conditions


	Sim
***** Engine Parameters (Piston Engine) *****	
Engine 1	
5.00	Throttle Position (%)
1899	Engine Speed (RPM)
1899	Propeller Speed (RPM)
4.97	Manifold Pressure (inHg)
2.44	Fuel Flow (lb/h)


	Sim
***** Flight Parameters *****	
80.1	Indicated Airspeed (kt)
1996	Altitude MSL (ft)
1251	Height AGL (ft)
***** Environment Parameters *****	
1013	Baro Press (hPa)
14.4	OAT (deg C)
0.00	Wind Dir (mag,deg)
0.00	Wind Spd (kt)
***** Sim Systems *****	
Off	Primary Motion (-)
Off	Secondary Motion (-)
-	Sound Level (-)
50	Vibration Level (%)


Time zero: measured throttle movement in each run.

Source: Super_Mushak_manual_takeoff_data_2026-11-02_10-25-04_legacy_plot.csv


1st Quadrant Combined Group 1 - Airspeed and Altitude

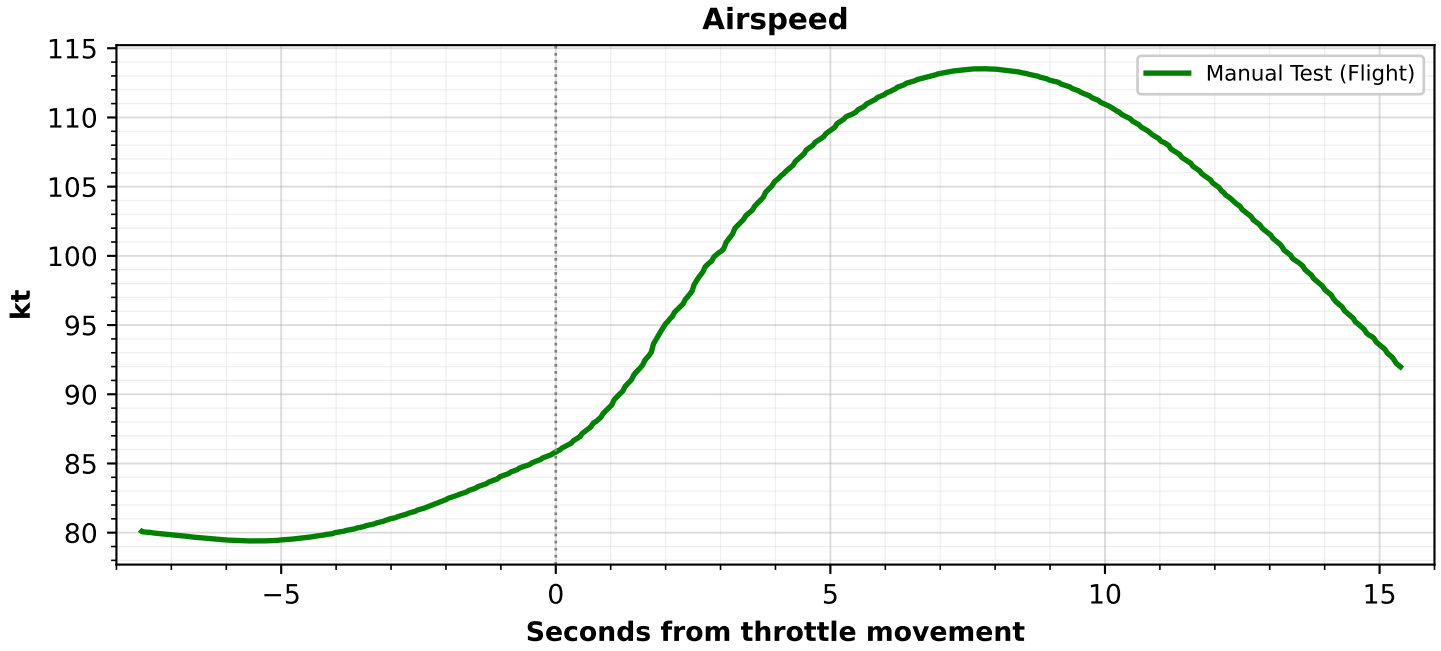


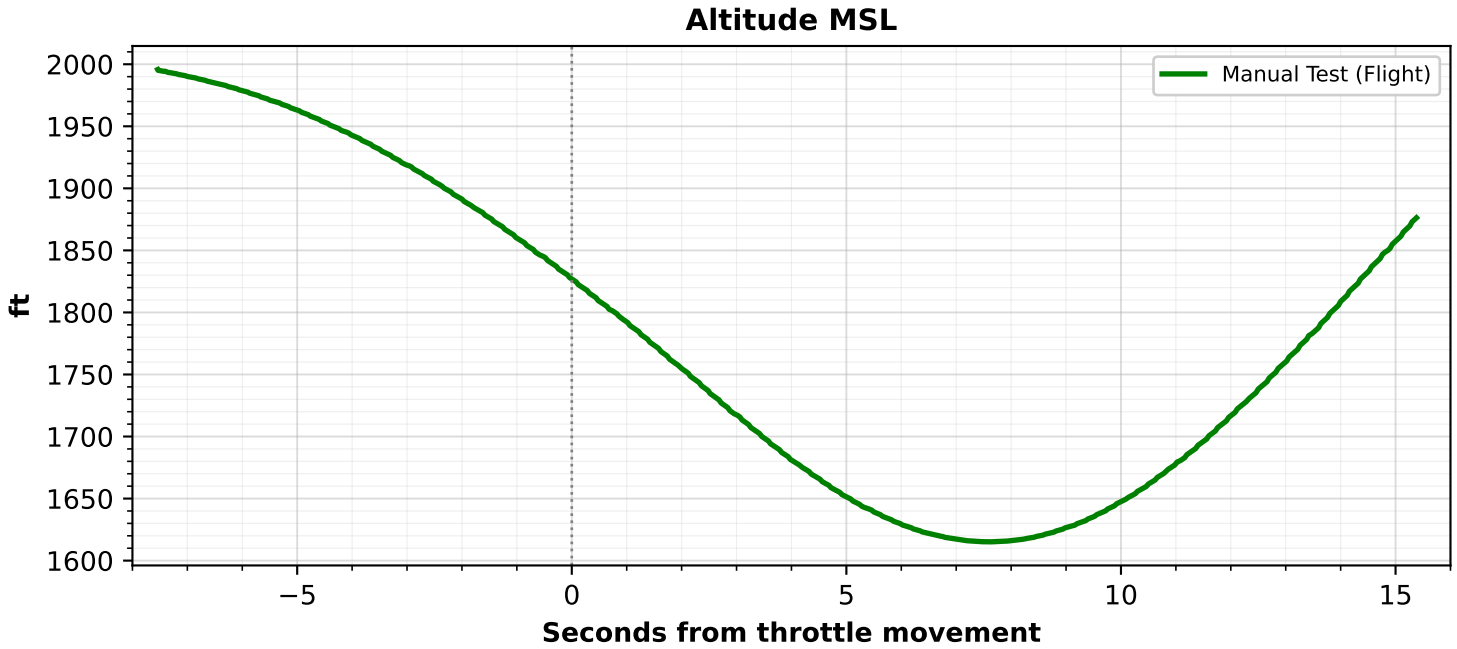


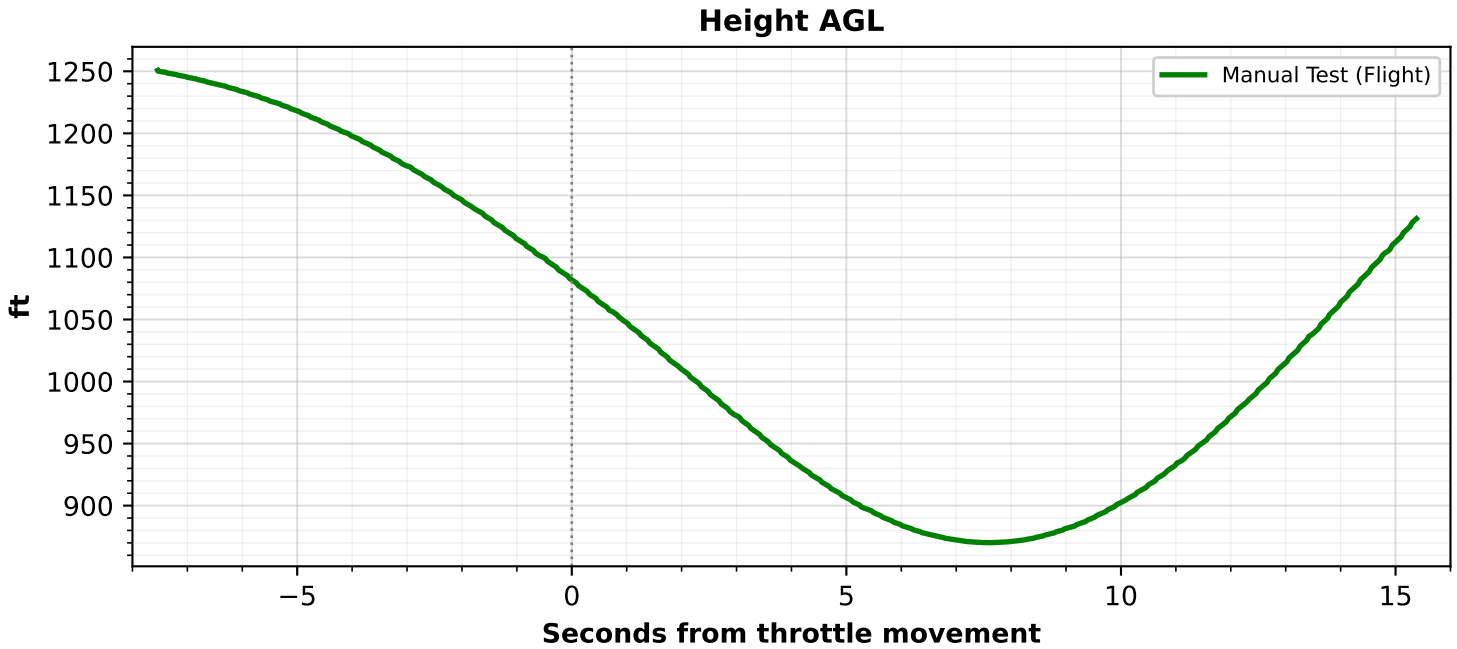


1st Quadrant Combined Group 2 - Throttle and Engine Response

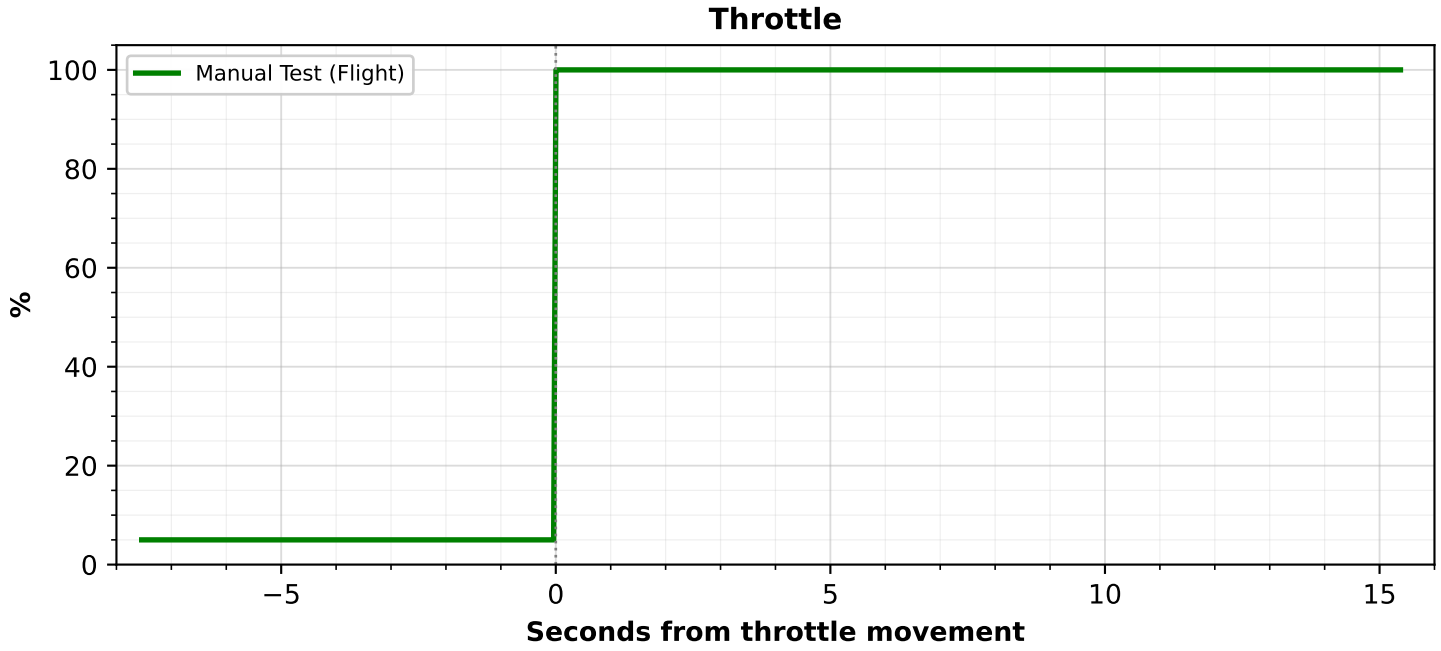


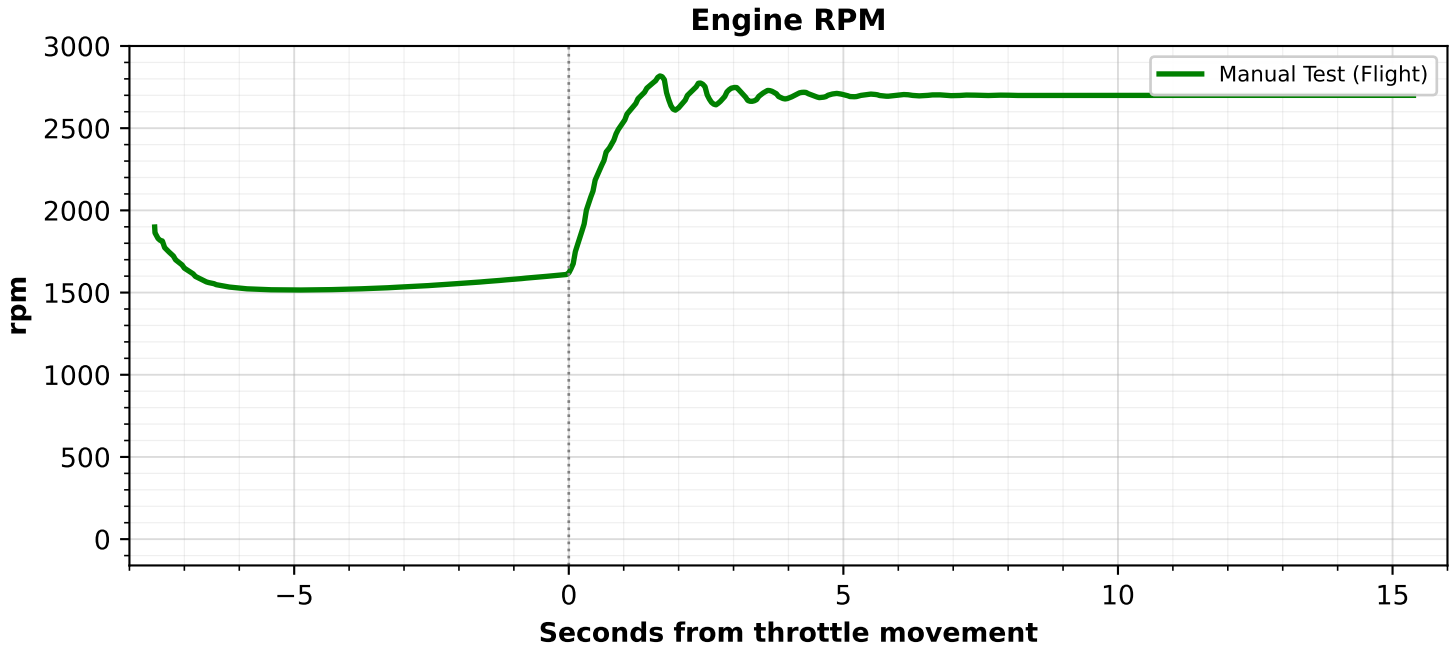

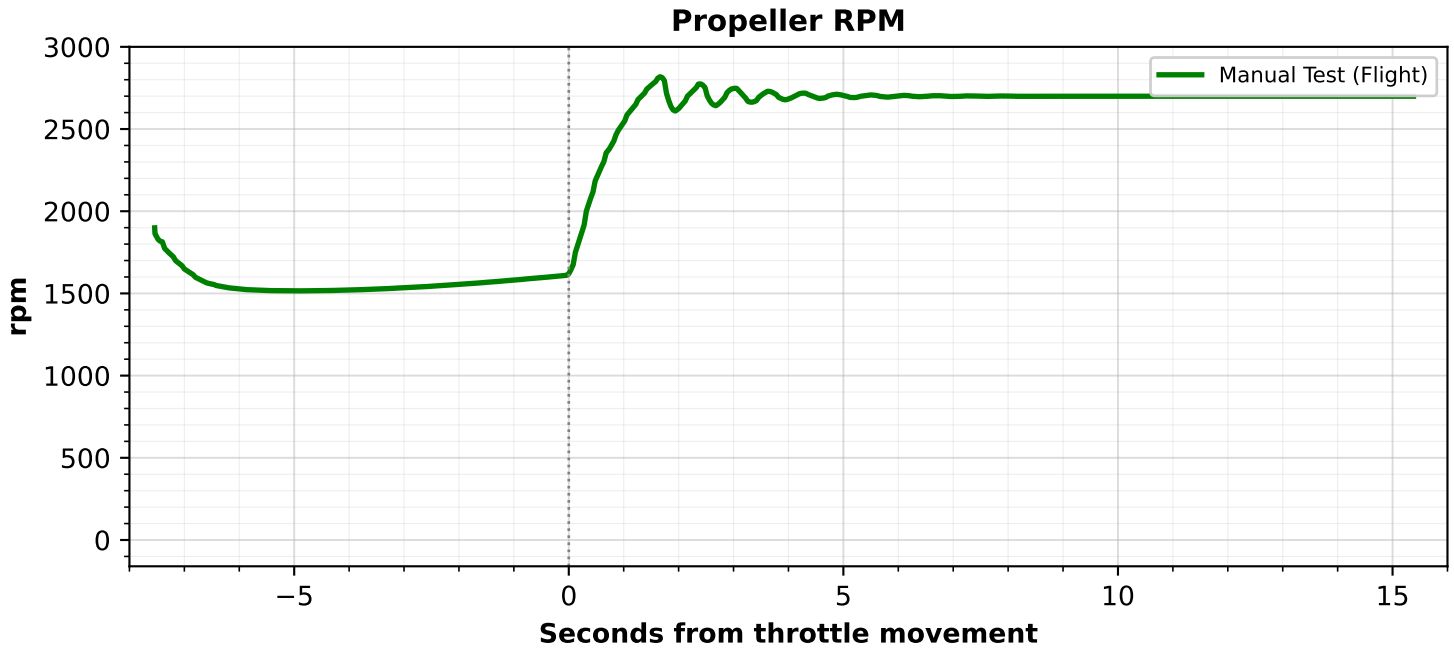

1st Quadrant Combined Group 3 - Engine Power Parameters

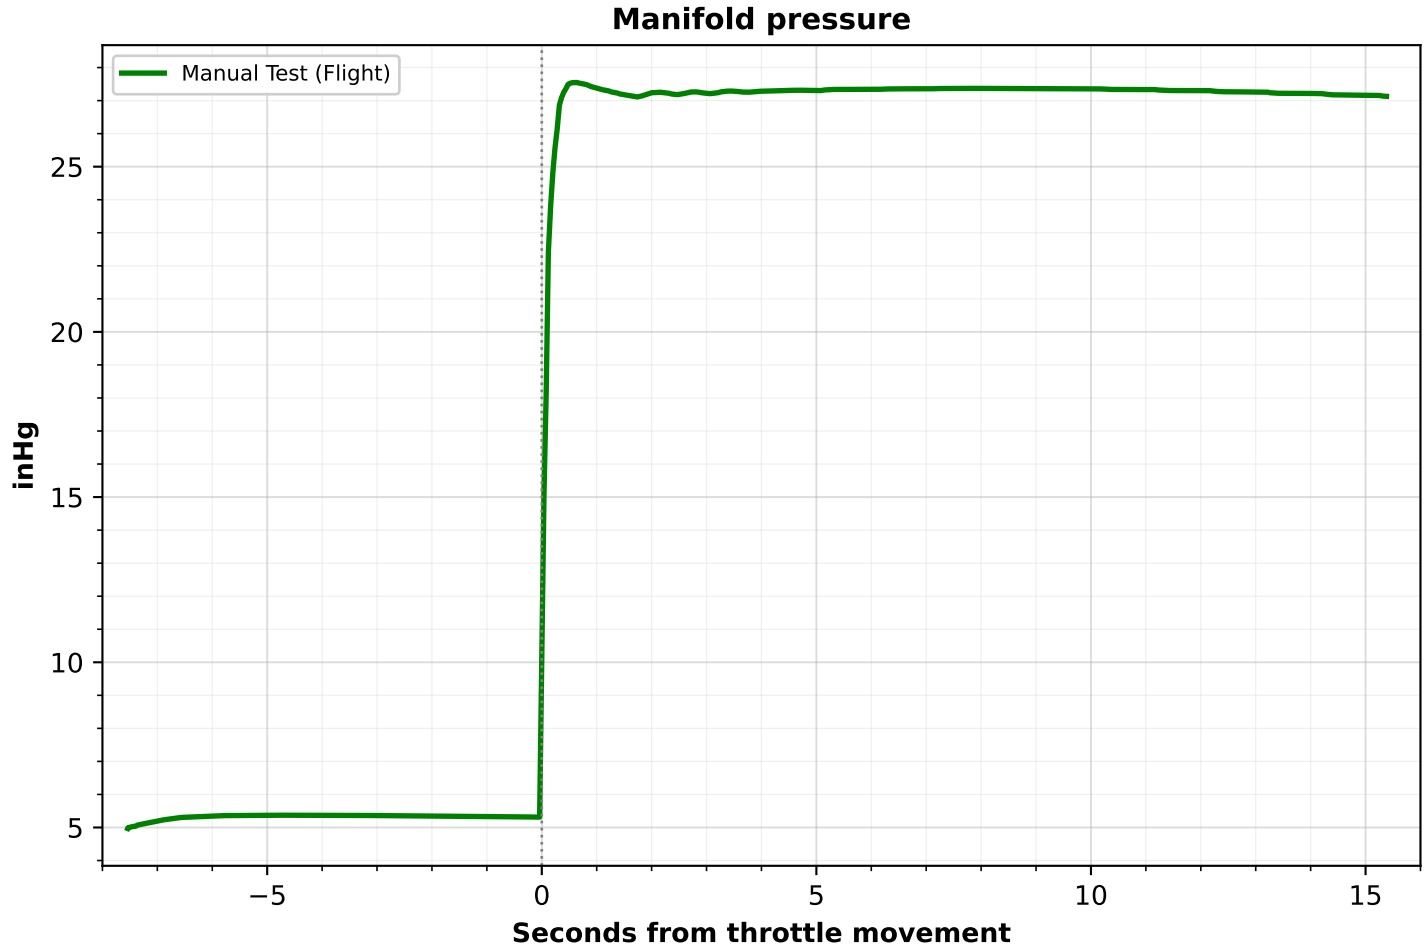

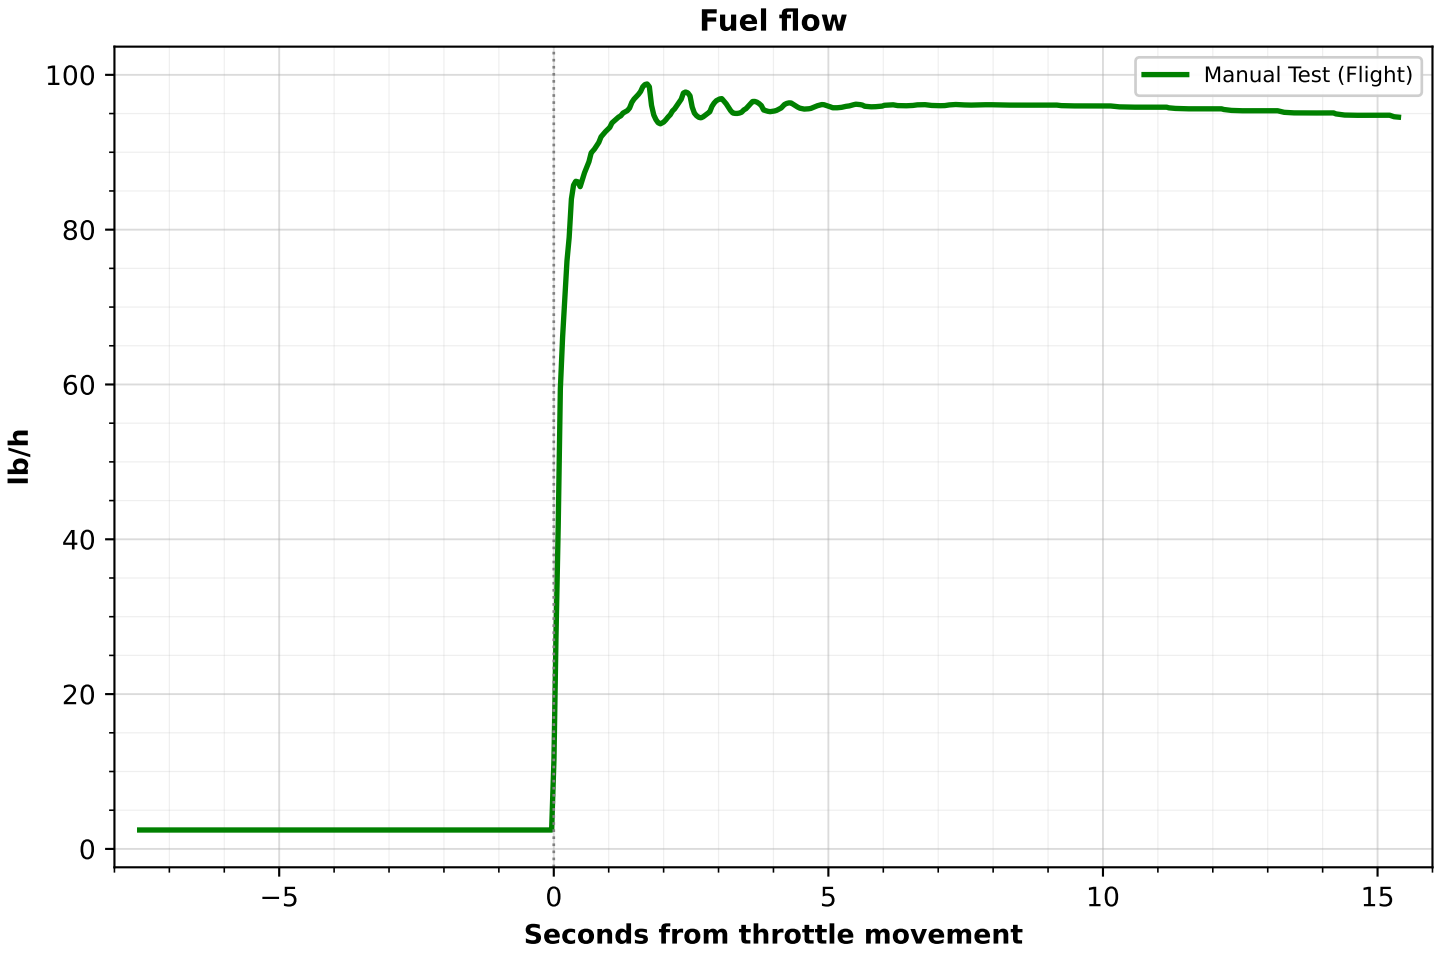

Super Mushshak Engine Acceleration - Ti / Tt Response Analysis
Engineering timing check - CS-FSTD(A) Issue 2, 1.f method

Metric	Manual	Automatic	Difference	Compare band	Result
Ti (10% response)	0.016 s	N/A	N/A	+/-0.25 s	Manual only
Tt (90% response)	0.251 s	N/A	N/A	+/-0.03 s	Manual only

Timing/repeatability: MEASURED

Channel: Manifold pressure (inHg)

Comparison bands: Ti = max(10% of Manual Ti, 0.25 s); Tt = 10% of Manual Tt (engineering comparison only).

