
${\sf NTEK\ Testing\ Technology\ Co.,\ Ltd.}$

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

Radiated Emission Measurement

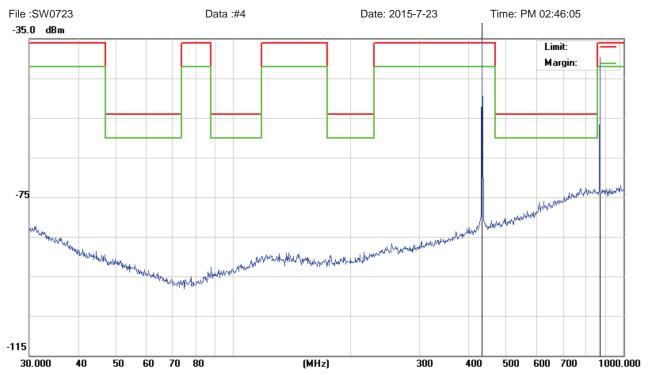

Site NTEK 9*6*6 Chamber #1

Limit: ETSI_300440_300220_operating_03M_PK

EUT: 无线模块

M/N: STX882-433 Mode: WORKING

Note:

Polarization: Horizontal

Power: AC 230V/50Hz

Humidity:

Temperature: 24 Humidity: 50 %

Distance:

No.	MI	k.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
			MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1	*	43	4.0649	-30.03	18.98	-11.05	-36.00	24.95	peak			
2	!	86	9.1302	-66.86	27.15	-39.71	-36.00	-3.71	peak			

*:Maximum data x:Over limit !:over margin


File:SW0723\Data:#4 Page: 1 Engineer Signature:

NTEK Testing Technology Co., Ltd.

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

Radiated Emission Measurement

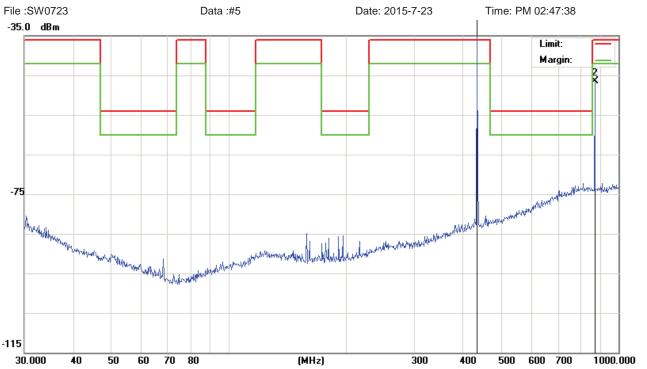

Site NTEK 9*6*6 Chamber #1

Limit: ETSI_300440_300220_operating_03M_PK

EUT: 无线模块

M/N: STX882-433 Mode: WORKING

Note:

Polarization: Vertical

AC 230V/50Hz Power:

Distance:

Temperature: 24

Humidity: 50 %

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1	*	434.0651	-34.18	18.98	-15.20	-36.00	20.80	peak			
2		869.1302	-73.58	27.15	-46.43	-36.00	-10.43	peak			


*:Maximum data x:Over limit !:over margin

File:SW0723\Data:#5 Engineer Signature: Page: 1

NTEK Testing Technology Co., Ltd.

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

Radiated Emission Measurement

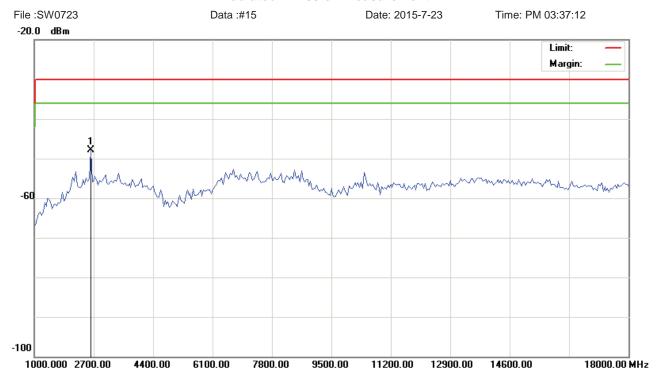

Site NTEK 9*6*6 Chamber #1

Limit: ETSI_300328_operating_03M_PK

EUT: 无线模块

M/N: STX882-433 Mode: WORKING

Note:

Polarization: Vertical Temperature: 24

Power: AC 230V/50Hz Humidity: 50 %

Distance:

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
	MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1 *	2615.000	-57.18	9.27	-47.91	-30.00	-17.91	peak			

*:Maximum data x:Over limit !:over margin


File :SW0723\Data :#15

NTEK Testing Technology Co., Ltd.

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

Radiated Emission Measurement

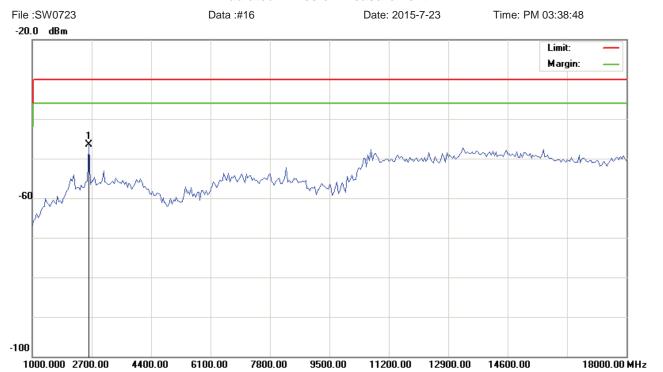

Site NTEK 9*6*6 Chamber #1

Limit: ETSI_300328_operating_03M_PK

EUT: 无线模块

M/N: STX882-433 Mode: WORKING

Note:

Polarization: Horizontal Power:

AC 230V/50Hz

24 Temperature:

Humidity: 50 %

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
	MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1 *	2615.000	-56.04	9.48	-46.56	-30.00	-16.56	peak			

Distance:

File: SW0723\Data:#16

Page: 1

Engineer Signature:

^{*:}Maximum data x:Over limit !:over margin