
REMARKS FOR MECHANICAL SUBCONTRACTOR:

1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.

2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.

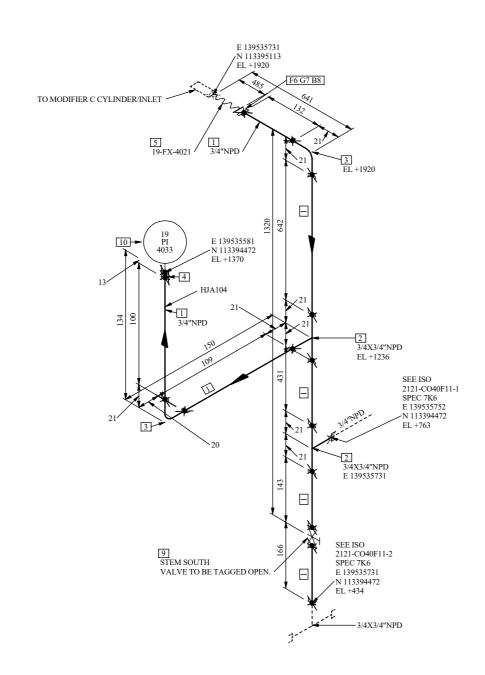

	BILL OF MATERIAL											
	OT COMPONENT DESCRIPTION	N.S. (IN)	ITEM CODE	QTY.	HOLD STATUS							
E	IPE											
1	PIPE - A312-TP304/304L DUAL GR PE SMLS T01AL2CZ02 S-80S <pipb04da23 480s=""> (L-PIP110)</pipb04da23>	3/4	12257956	1.7 M								
E	TITINGS											
2	TEE ASME B16.11 3000# A182-F304/304L DUAL GR SWE SWE - R11FNL2A1101 NREQD <tesb450lbk3 4=""> (L-TES04)</tesb450lbk3>	3/4X3/4	12258183	2								
3	90 ELBOW ASME B16.11 3000# A182-F304/304L DUAL GR SWE SWE - R31FNL2A1103 NREQD <90FB450LBK3/4> (L-90F05)	3/4	12258116	2								
4	COUPLING ASME B16.11 3000# A182-F304/304L DUAL GR SWE SWE - R01FNL2A1101 NREQD <fcpb450lbk3 4=""> (L-FCP08)</fcpb450lbk3>	3/4	I2258104	1								
5	SPECIALTY COMPONENT	3/4	19-FX-4021	1								
l _E	LANGES											
6	SW FLANGE ASME B16.5 1500# A182-F316/316L DUAL GR RFFE SWE 125 - 250 AARH F02CKL1MB105 S-80S <swfb34d4553 480s=""> (L-SWF32)</swfb34d4553>	3/4	146933029	1								
	GASKETS .											
7	SPIRAL WOUND GASKET ASME B16.20 1500# RFTBE 304/GRAFOIL SS 304 SS 304 ASME B16.5 G03GKP1IS04 < N/A> (N/A)	3/4	12764616	1								
E	BOLTS											
8	STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE 1010B0301 <sb2r51g3 2="" 441=""> - 2 NUTS PER BOLT - 115 mm Length</sb2r51g3>	3/4	153437466	4								
1	/ALVES / IN-LINE ITEMS											
9	GATE VALVE API 602 1500# A182-F316/316L DUAL GR SWE SWE 12-316&HF WB-OS&Y SOW API 602 HW V01GKL1M115E NREQD < G63 4L-AL028> (L-AL028)	3/4	15390763	1								
I	NSTRUMENTS											
1	0 INSTRUMENT COMPONENT	3/4	19-PI-4033	1								

07:52:48	4) FOR 5) GUS 6) CRO 7) IN O 8) ACT	3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ★, ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT 4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603. 5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002. 6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED. 7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN. 8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603). 9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.							
SUPPORTS LEGEND: DENOTES PARTS LIST NO PIPE A RESTING SUPPORT G = GUIDE F = AXIAL STOP B = ANCHOR M = SPRING S = TIFLON PAD WHERE A WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE. STRESS CALC. No								STRUCTURE.	TI
三 三 三	01	ISSUED FOR REFERENCE	15-DEC-23	M.YADAV	P.VAZE	G.PAGANONI		P & ID 19-A-19-000-1-01-00001 sheet 36]]
DA	00	ISSUED FOR REFERENCE	28-JUL-23	U.CHAVAN	P.VAZE	G.PAGANONI		LINE LIST N° 19-L-19-000-2-00-80602	
EXTR.	REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT	PIPE LAYOUT № 19-L-19-000-2-00-86197 sheet 1	

Signature for construction is shown on Iso list of relevant CWA

ISSUED FOR

REFERENCE

ISOMETRIC DRAWING LINE 3/4"-CO-40F11-7K6

PIPE MATERIAL NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102 304, dual grade

CONTRACTOR:

HEAT TREATMENT (PWHT)

INSULATION CODE / THK. (mm)

NR

Art 4.3

3. WELDING ACCORDING TO 45-L-45-000-2-00-80021.

N 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE" PAINTING SCHEME (3)

4001008 PIPING CLASS 4274-XH-DL-2121CO40F11-4 7K6 WELDING CLASS (4) LOW LINEAL DENSITY POLYETHILENE (PEL) AND POLYPROPYLENE (PP) PLANTS PED CATEGORY

CLIENT / COMPLEX REPSOL POLYMEROS/ FOR PROJECT - ALBA PROJECT SINES INDUSTRIAL COMPLEX

PROJECT:

REPSQL DRAWING NUMBER 19-000-2-02-00001 sheet 2121CO40F11-4 ANNEX 01

CONTRACTOR DRAWING NUMBER: