
STREAM NO.:4550

REMARKS FOR MECHANICAL SUBCONTRACTOR:

1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.

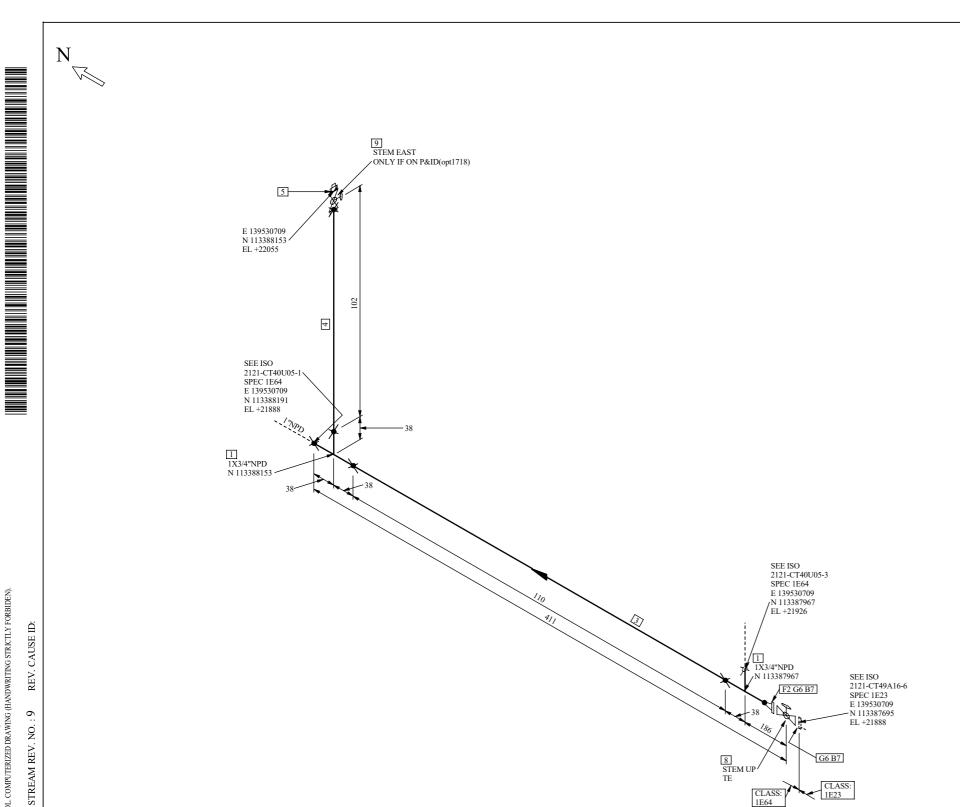

BILL OF MATERIAL HOLD COMPONENT DESCRIPTION ITEM CODE QTY STATUS (IN) FITTINGS REDUCING TEE ASME B16.9 A234-WPB BE SMLS C32DC04V02 S-XS x 1X3/4 <TRBA200F312161116> (L-9918) WN FLANGE ASME B16.5 300# A105N RFFE BE 125 - 250 AARH F01CFC44BV05 S-XS I4217849 PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A11XS > (L-6679) I132793 0.2 M PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A13/4XS > (L-6679) I132785 0.1 M PLUG ROUND HEAD ASME B16.11 - A105N MTE NREQD - R42FQC44W001 NREQD I10088232 <PLUA300CK3/4> (L-77) GASKETS SPIRAL WOUND GASKET ASME B16.20 300# RFFE 304/PTFE CARBON STEEL SS 304 ASME 1 163598746 B16.5 G03GFB1IG12 < SPAQ505R3EA1 > (L-SPA05) STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 153437418 <SB2R51G5/831/4> - 2 NUTS PER BOLT - 80 mm Length VALVES / IN-LINE ITEMS BALL VALVE API 608 300# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 AARH 19918107 2PSB-FULL BORE FLOATING BALL OHW ASME B16.5 V04JFC29BZZG NREOD <B41L-AL084> (L-AL084) BALL VALVE ASME B16.34 800# A105N SWE FTE 316/R-PTFE, GF 3PSB-RED BORE I66567923 FLOATING BALL OHW FIRE SAFE : API 607 & ANTISTATIC DEVICES "A60T series" TEAL V04JIC44126IG NREQD <N/A> (N/A)

1) LINES 1.1/2 AND SMALLER SHALL BE SUPPORTED IN PROTECTION OF THE WISE INDICATED.  2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.  3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ▼, ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT  4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.  5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.  6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.									
2023 11:28:	7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.  8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF. TO 4274-LZ-PC-00000603).  9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.  SUPPORTS LEGEND:    DENOTES PARTS LIST NO   PIPE   A RESTING SUPPORT   A RESTING SUPPORT   GILDE   F = AXIALSTOP   B = ANCHOR   M = SPRING   S = TIFLON PAD								Si
-70								STRESS CALC. Nº	TITI
-,								-	_ <b>т</b>
Ë								P & ID 19-A-19-000-1-01-00001 sheet 49	15
ΔI	00	ISSUED FOR REFERENCE	07-JUL-23	U.CHAVAN	P.VAZE	G.PAGANONI		LINE LIST Nº	1
								19-L-19-000-2-00-80602 PIPE LAYOUT N°	4
EXTR.	REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT	19-L-19-000-2-00-86196 sheet 6	

REFERENCE Signature for construction is shown on Iso list of relevant CWA ISOMETRIC DRAWING

**ISSUED FOR** 

LINE INSULATION CODE / THK. (mm) 1"-CT-40U05-1E64

PIPE MATERIAL

HEAT TREATMENT (PWHT)

CS

NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST.

2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102

3. WELDING ACCORDING TO 45-L-45-000-2-00-80021

19-000-2-02-00001 sheet 2121CT40U05-2

5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE" PAINTING SCHEME (3)

DRAWING NUMBER

CONTRACTOR: CONTRACTOR DRAWING NUMBER: PROJECT: PIPING CLASS 4001008 4274-XH-DL-2121CT40U05-2 1E64

WELDING CLASS (4) LOW LINEAL DENSITY POLYETHILENE (PEL) AND POLYPROPYLENE (PP) PLANTS PED CATEGORY FOR PROJECT - ALBA PROJECT Art 4.3 REPSQL

ANNEX

CLIENT / COMPLEX REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX

00

FILENAME: 19-000-2-02-00001 sheet 2121CT40U05-2.dwg