23

REV. CAUSE ID:

STREAM REV. NO.: 10

STREAM NO.:4005

REMARKS FOR MECHANICAL SUBCONTRACTOR:

1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.

DESCRIPTION

□ DENOTES PARTS LIST NO PIPE SUPPORT —

6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.

ISSUED FOR REFERENCE

ISSUED FOR REFERENCE

2)

ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.

FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ✗ , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT

A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD WHERE A WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

P.VAZE

P.VAZE

CHECK BY

U.CHAVAN

U.CHAVAN

08-DEC-23

28-APR-23

G.PAGANONI

G.PAGANONI

APPR. BY

TRESS CALC. No

PIPE LAYOUT No


APPR. CLIENT

19-L-19-000-2-00-80602

19-L-19-000-2-00-86197 sheet 5

() CROSSING BETWEEN WEEDS ON THE ELING STALE NOT BE ADMITTED.

7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.

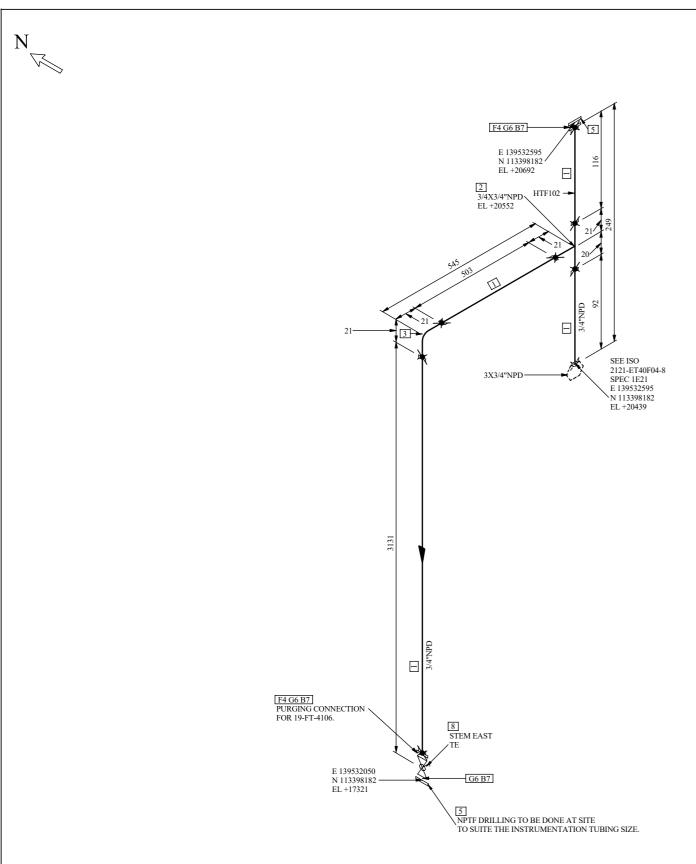

BILL OF MATERIAL HOLD COMPONENT DESCRIPTION ITEM CODE QTY (IN) STATUS PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A13/4XS> (L-6679) I132785 FITTINGS TEE ASME B16.11 3000# A105N SWE SWE - R11FNC441101 NREQD <TESA300LBK3/4> 3/4X3/4 I1651300 90 ELBOW ASME B16.11 3000# A105N SWE SWE - R31FNC441103 NREQD I1651298 <90FA300LBK3/4> (L-178) FLANGES SW FLANGE ASME B16.5 300# A105N RFFE SWE 125 - 250 AARH F02CFC44B105 S-XS 19762190 <SWFA300R353/4XS> (L-375) BLIND FLANGE ASME B16.5 300# A105N RFFE NREQD 125 - 250 AARH F10CFC44B005 I1652375 <BLFA300R353/4> (L-143) SASKETS SPIRAL WOUND GASKET ASME B16.20 300# RFTBE 304/GRAFOIL CARBON STEEL SS 304 3/4 163508950 ASME B16.5 G03GFP1IS12 < N/A> (N/A) STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 153437418 <SB2R51G5/831/4> - 2 NUTS PER BOLT - 80 mm Length ALVES / IN-LINE ITEMS BALL V-FLT-SS-FB API 608 300# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 I64812611 AARH 2PSB-FULL BORE FLOATING BALL OHW TIGHT SHUT-OFF (TSO) ASME B16.5 V1FJFC29BZZH NREQD <N/A> (N/A) PIPE MATERIAL NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021 HEAT TREATMENT (PWHT) 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE" PAINTING SCHEME (3) CONTRACTOR: CONTRACTOR DRAWING NUMBER: PROJECT: PIPING CLASS 4001008 4274-XH-DL-2121ET40F04-20 1E21 LOW LINEAL DENSITY POLYETHILENE (PEL) CLIENT / COMPLEX AND POLYPROPYLENE (PP) PLANTS REPSOL POLYMEROS/ FOR PROJECT - ALBA PROJECT SINES INDUSTRIAL COMPLEX REPSQL INSULATION CODE / THK. (mm) DRAWING NUMBER ANNEX 01 19-000-2-02-00001 sheet 2121ET40F04-20

ISSUED FOR	
REFERENCE	

Signature for construction is shown on Iso list of relevant CWA

> WELDING CLASS (4) PED CATEGORY

ISOMETRIC DRAWING 19-A-19-000-1-01-00001 sheet 36 LINE

3/4"-ET-40F04-1E21

FILENAME: 19-000-2-02-00001 sheet 2121ET40F04-20.dwg