




THIS DOCUMENT BELONGS TO REPSOL. IT CAN NOT BE COPIED, REPRODUCED AND/OR USED WITHOUT PREVIOUS AUTHORIZATION OF REPSOL. COMPUTERIZED DRAWING (HANDWRITING STRICTLY FORBIDDEN).

EXTR. DATE: 09-12-2023 09:10:00 STREAM NO.: 3250 STREAM REV. NO. : 10 REV. CAUSE ID: 23

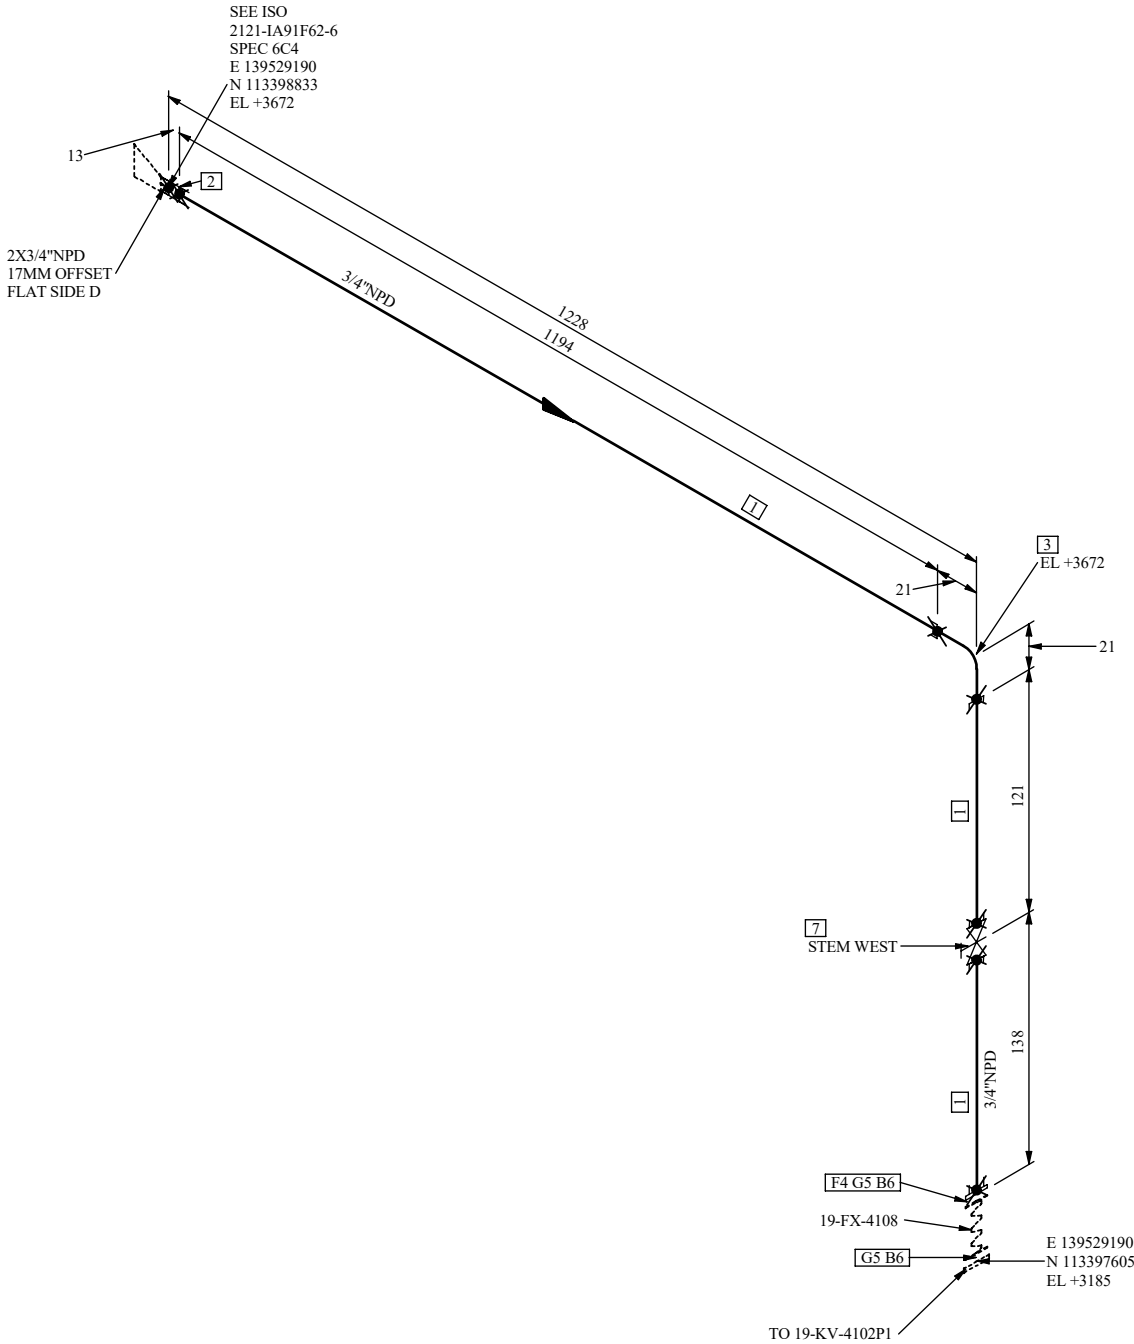

BILL OF MATERIAL					
PT NO	COMPONENT DESCRIPTION	N.S. (IN)	ITEM CODE	QTY	HOLD STATUS
PIPE					
1	PIPE - A312-TP304/304L DUAL GR PE SMLS T01AL2CZ02 S-40S <PIPB04DA23/440S> (L-PIP111)	3/4	I2257938	1.4 M	
FITTINGS					
2	COUPLING ASME B16.11 3000# A182-F304/304L DUAL GR SWE SWE - R01FNL2A1101 NREQD <FCPB450LBK3/4> (L-FCP08)	3/4	I2258104	1	
3	90 ELBOW ASME B16.11 3000# A182-F304/304L DUAL GR SWE SWE - R31FNL2A1103 NREQD <90FB450LBK3/4> (L-90F05)	3/4	I2258116	1	
FLANGES					
4	SW FLANGE ASME B16.5 150# A182-F304/304L DUAL GR RFFE SWE 125 - 250 AARH F02CDL2AB105 S-40S <SWFB450R153/440S> (L-SWF30)	3/4	I2260362	1	
GASKETS					
5	SPIRAL WOUND GASKET ASME B16.20 150# RFTBE 304/GRAFOIL SS 304 SS 304 ASME B16.5 G03GDP1IS04 <N/A> (N/A)	3/4	I1654481	2	
BOLTS					
6	STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B8M CL2/A194-8MA INCH SIZE I01OB1601 <SB2R58G1/221/2> - 2 NUTS PER BOLT - 65 mm Length	1/2	I63801410	8	
VALVES / IN-LINE ITEMS					
7	GATE VALVE API 602 800# A182-F316/316L DUAL GR SWE SWE I2-316&HF API 602 A193-B8M CL2/8MA BB-OS&Y SOW API 602 HW V01GIL1M114N NREQD <G63_4L-AL021> (L-AL021)	3/4	I3404186	1	

REMARKS FOR MECHANICAL SUBCONTRACTOR: 1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED. 2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION. 3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ✕ , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT 4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603. 5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002. 6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED. 7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN. 8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603). 9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.						
SUPPORTS LEGEND: □ DENOTES PARTS LIST NO PIPE SUPPORT A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD WHERE □ WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.						
						STRESS CALC. N° -
01	ISSUED FOR REFERENCE	08-DEC-23	M.YADAV	P.VAZE	G.PAGANONI	P & ID 19-A-19-000-1-01-00001 sheet 106
00	ISSUED FOR REFERENCE	28-JUL-23	M.YADAV	P.VAZE	G.PAGANONI	LINE LIST N° 19-L-19-000-2-00-80602
REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT PIPE LAYOUT N° 19-L-19-000-2-00-86197 sheet 1

ISSUED FOR REFERENCE	PIPE MATERIAL		NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102. 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021. 4. PAINTING ACCORDING TO 45-A-45-000-1-00-20160. 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "~N/A~" MEANS UNICODE IS "NOT AVAILABLE".							
	304, dual grade									
	HEAT TREATMENT (PWHIT)									
	N									
Signature for construction is shown on Iso list of relevant CWA	PAINTING SCHEME (3)				CONTRACTOR DRAWING NUMBER: 4274-XH-DL-2121IA91F0Z-1		PROJECT: 4001008			
	NR									
	PIPING CLASS									
	6C4									
TITLE	WELDING CLASS (4)		 <div>LOW LINEAL DENSITY POLYETHYLENE (PEL) AND POLYPROPYLENE (PP) PLANTS FOR PROJECT - ALBA PROJECT</div> <div>CLIENT / COMPLEX REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX</div>							
ISOMETRIC DRAWING LINE	M									
	PED CATEGORY									
	Art 4.3									
3/4"-IA-91F0Z-6C4	INSULATION CODE / THK. (mm)		ANNEX 19		SPEC. L		DRAWING NUMBER 19-000-2-02-00001 sheet 2121IA91F0Z-1		REV. 01	
	N 0									