
04-09-DATE:

REV.

SUPPORTS LEGEND:

ISSUED FOR REFERENCE

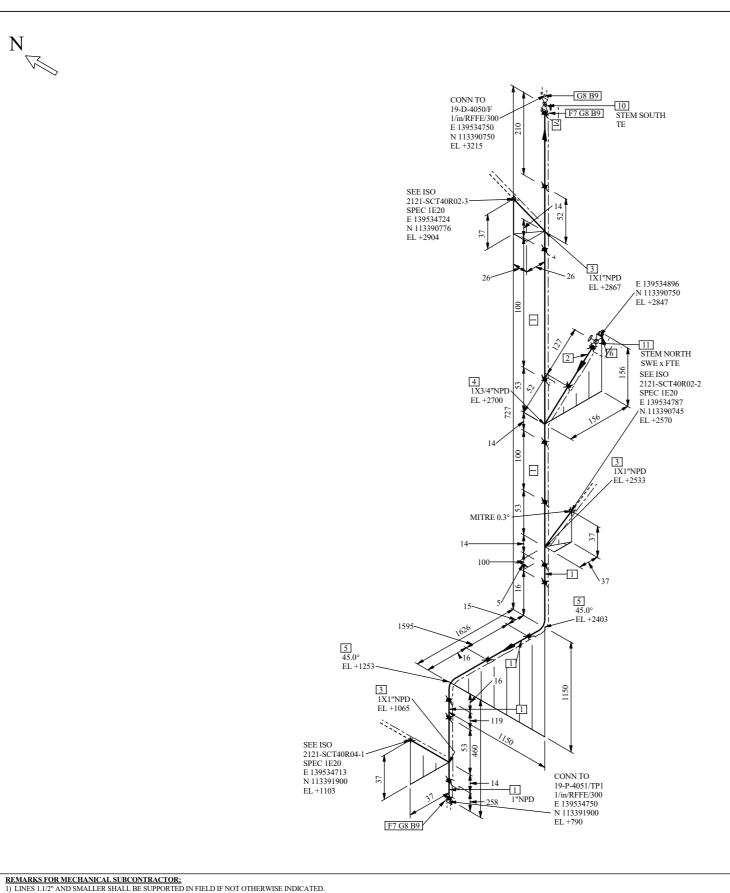

2)

ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.

FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ✗ , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT

9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019

04-SEP-23

U.CHAVAN

A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD WHERE A WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

P.VAZE

CHECK BY

G.PAGANONI

APPR. BY

TRESS CALC. No

PIPE LAYOUT No

APPR. CLIENT

19-A-19-000-1-01-00001 sheet 46

19-L-19-000-2-00-86197 sheet 1

19-L-19-000-2-00-80602

4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.

DENOTES PARTS LIST NO PIPE SUPPORT —

DESCRIPTION

(7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.

8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603

6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.

BILL OF MATERIAL HOLD COMPONENT DESCRIPTION ITEM CODE QTY (IN) STATUS PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A11XS > (L-6679) I132793 PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A13/4XS > (L-6679) I132785 0.1 M 45 LATERAL ASME B16.11/AA 3000# A105N SWE SWE - R17RNC441101 Undefined 1X1 I11139836 REDUCING 45 LATERAL ASME B16.11/AA 3000# A105N SWE SWE - R18RNC441101 1X3/4 163782626 Undefined <LR4A300LB1211> (L-LR403) 45 ELBOW ASME B16.11 3000# A105N SWE SWE - R32FNC441101 NREQD I1651292 <45FA300LBK1> (L-184) PLUG ROUND HEAD ASME B16.11 - A105N MTE NREQD - R42FQC44W001 NREQD I10088232 <PLUA300CK3/4> (L-77) LANGES SW FLANGE ASME B16.5 300# A105N RFFE SWE 125 - 250 AARH F02CFC44B105 S-XS I4217823 <SWFA300R351XS> (L-375) SPIRAL WOUND GASKET ASME B16.20 300# RFTBE 304/GRAFOIL CARBON STEEL SS 304 1 163508951 ASME B16.5 G03GFP1IS12 <N/A> (N/A) STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 153437418 <SB2R51G5/831/4> - 2 NUTS PER BOLT - 80 mm Length VALVES / IN-LINE ITEMS 0 BALL VALVE API 608 300# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 AARH I9918107 2PSB-FULL BORE FLOATING BALL OHW ASME B16.5 V04JFC29BZZG NREOD BALL VALVE API 608 800# A216-WCB SWE FTE 316/R-PTFE, GF B7/2H 2PSB-FULL 166529817 BORE FLOATING BALL OHW V04JIC2912ZZV NREQD <N/A> (N/A)

| REFERENCE |
|-------------------------------------|
| ICH EICH VEE |
| |
| Signature for construction is shown |
| on Iso list of relevant CWA |
| ITLE |
| TOO METERIC DRAMMA |

LINE

1"-SCT-40R02-1E20 (ET)

ISSUED FOR

ISOMETRIC DRAWING

PIPE MATERIAL

HEAT TREATMENT (PWHT)

CS

PAINTING SCHEME (3) CONTRACTOR: PIPING CLASS 1E20

NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102

CONTRACTOR DRAWING NUMBER:

3. WELDING ACCORDING TO 45-L-45-000-2-00-80021

5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE"

4001008 4274-XH-DL-2121SCT40R02-1 WELDING CLASS (4) LOW LINEAL DENSITY POLYETHILENE (PEL) AND POLYPROPYLENE (PP) PLANTS

FOR PROJECT - ALBA PROJECT

CLIENT / COMPLEX REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX

00

PROJECT:

PED CATEGORY Art 4.3 REPSQL INSULATION CODE / THK. (mm) ANNEX DRAWING NUMBER

19-000-2-02-00001 sheet 2121SCT40R02-1