


THIS DOCUMENT BELONGS TO REPSOL. IT CAN NOT BE COPIED, REPRODUCED AND/OR USED WITHOUT PREVIOUS AUTHORIZATION OF REPSOL. COMPUTERIZED DRAWING (HANDWRITING STRICTLY FORBIDDEN).


EXTR. DATE: 29-02-2024 18:41:37

STREAM NO.:4105

REV. CAUSE ID: 8

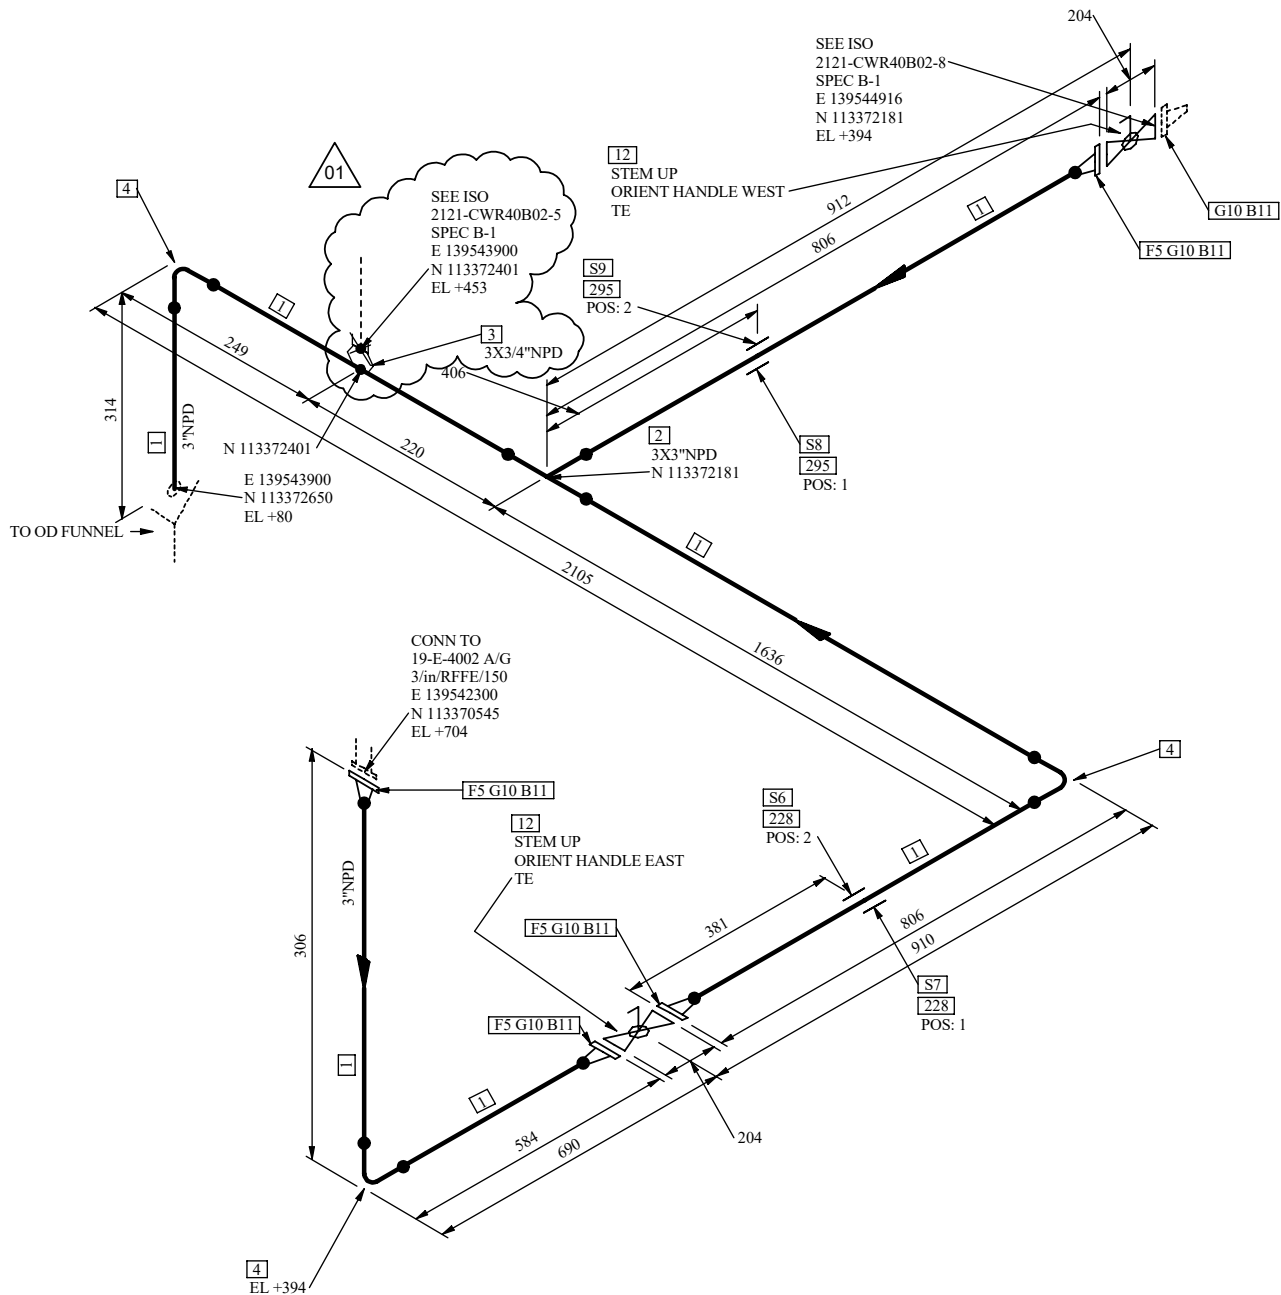

REMARKS FOR MECHANICAL SUBCONTRACTOR:

- 1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.
2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.
3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT
4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.
6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.
7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.
8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603).
9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.

SUPPORTS LEGEND:  DENOTES PARTS LIST NO  PIPE SUPPORT  A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD WHERE  WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

							STRESS CALC. N° REP-PE-008
01	ISSUED FOR CONSTRUCTION	29-FEB-24	M.YADAV	P.VAZE	G.PAGANONI		P & ID 19-A-19-000-1-01-00001 sheet 30
00	ISSUED FOR CONSTRUCTION	11-NOV-22	M.YADAV	P.VAZE	G.PAGANONI		LINE LIST N° 19-L-19-000-2-00-80602
REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT	PIPE LAYOUT N° 19-L-19-000-2-00-86198 sheet 1

APPROVED FOR
CONSTRUCTION



Signature for construction is shown
on Iso list of relevant CWA

TITLE
**ISOMETRIC DRAWING
LINE**

3"-CWR-40B04-B-1 (P)

BILL OF MATERIAL

PT NO	COMPONENT DESCRIPTION	N.S. (IN)	ITEM CODE	QTY	HOLD STATUS
PIPE					
1	PIPE - A106-B BE SMLS T01AC03V02 S-STD <PIPA010B13STD> (L-7806)	3	I117921	3.7 M	
FITTINGS					
2	STRAIGHT TEE ASME B16.9 A234-WPB BE SMLS C31DC04V01 S-STD <TEBA200F3151515> (L-6955)	3X3	I129163	1	
3	REDUCING SOCKOLET MSS-SP-97 3000# A105N BE SWE - R13DNC44V101 NREQD <SOKA300LB01511> (L-343)	3X3/4	I1651368	1	
4	90 LR ELBOW ASME B16.9 A234-WPB BE SMLS C01DC04V01 S-STD <90LA200F33STD> (L-7955)	3	I128599	3	
FLANGES					
5	WN FLANGE ASME B16.5 150# A105N RFFE BE 125 - 250 AARH F01CDC44BV05 S-STD <WNFA300R153STD> (L-149)	3	I4217820	4	
PIPE SUPPORTS					
6	STAKES SUPPORTS ST09 L80X80X10	3	228	1	
7	RESTING SHOE WELDED -C1A1 H = 100 L = 300	3	228	1	
8	RESTING SHOE WELDED -C1A1 H = 100 L = 300	3	295	1	
9	STAKES SUPPORTS ST09 L80X80X10	3	295	1	
GASKETS					
10	FLAT RING GASKET ASME B16.21 150# RFTBE NA/ARAMIDIC/NBR ASME B16.5 G02HDP2QR01 <NMGQ009R1FC3> (L-NMG11)	3	I1169032	5	
BOLTS					
11	STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I01OB0301 <SB2R51G5/831/2> - 2 NUTS PER BOLT - 90 mm Length	5/8	I53437440	20	
VALVES / IN-LINE ITEMS					
12	BALL V-FLT-SS-RB BS EN ISO 17292 150# A216-WCB RFFE 304/R-PTFE, GF B7/2H 125 - 250 AARH 2PSB-RED BORE FLOATING BALL LE ASME B16.5 V1RFDC29B1V NREQD <B43L-AL107> (L-AL107)	3	I2498375	2	

PIPE MATERIAL		NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102. 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021. 4. PAINTING ACCORDING TO 45-A-45-000-1-00-20160. 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "~N/A~" MEANS UNICODE IS "NOT AVAILABLE".			
CS					
HEAT TREATMENT (PWHT)					
N					
PAINTING SCHEME (3)			CONTRACTOR DRAWING NUMBER: 4274-XH-DL-2121CWR40B04-1	PROJECT: 4001008	LOW LINEAL DENSITY POLYETHYLENE (PEL) AND POLYPROPYLENE (PP) PLANTS FOR PROJECT - ALBA PROJECT  CLIENT / COMPLEX REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX
I					
PIPING CLASS					
B-1					
WELDING CLASS (4)					
E					
PED CATEGORY					
III					
INSULATION CODE / THK. (mm)		ANNEX 19	SPEC. L	DRAWING NUMBER 19-000-2-02-00001 sheet 2121CWR40B04-1	
P 50					