






THIS DOCUMENT BELONGS TO REPSOL. IT CAN NOT BE COPIED, REPRODUCED AND/OR USED WITHOUT PREVIOUS AUTHORIZATION OF REPSOL. COMPUTERIZED DRAWING (HANDWRITING STRICTLY FORBIDDEN).

EXTR. DATE: 07-07-2023 11:26:30 STREAM NO.:4550 CWA NO.: 9 REV. CAUSE ID:

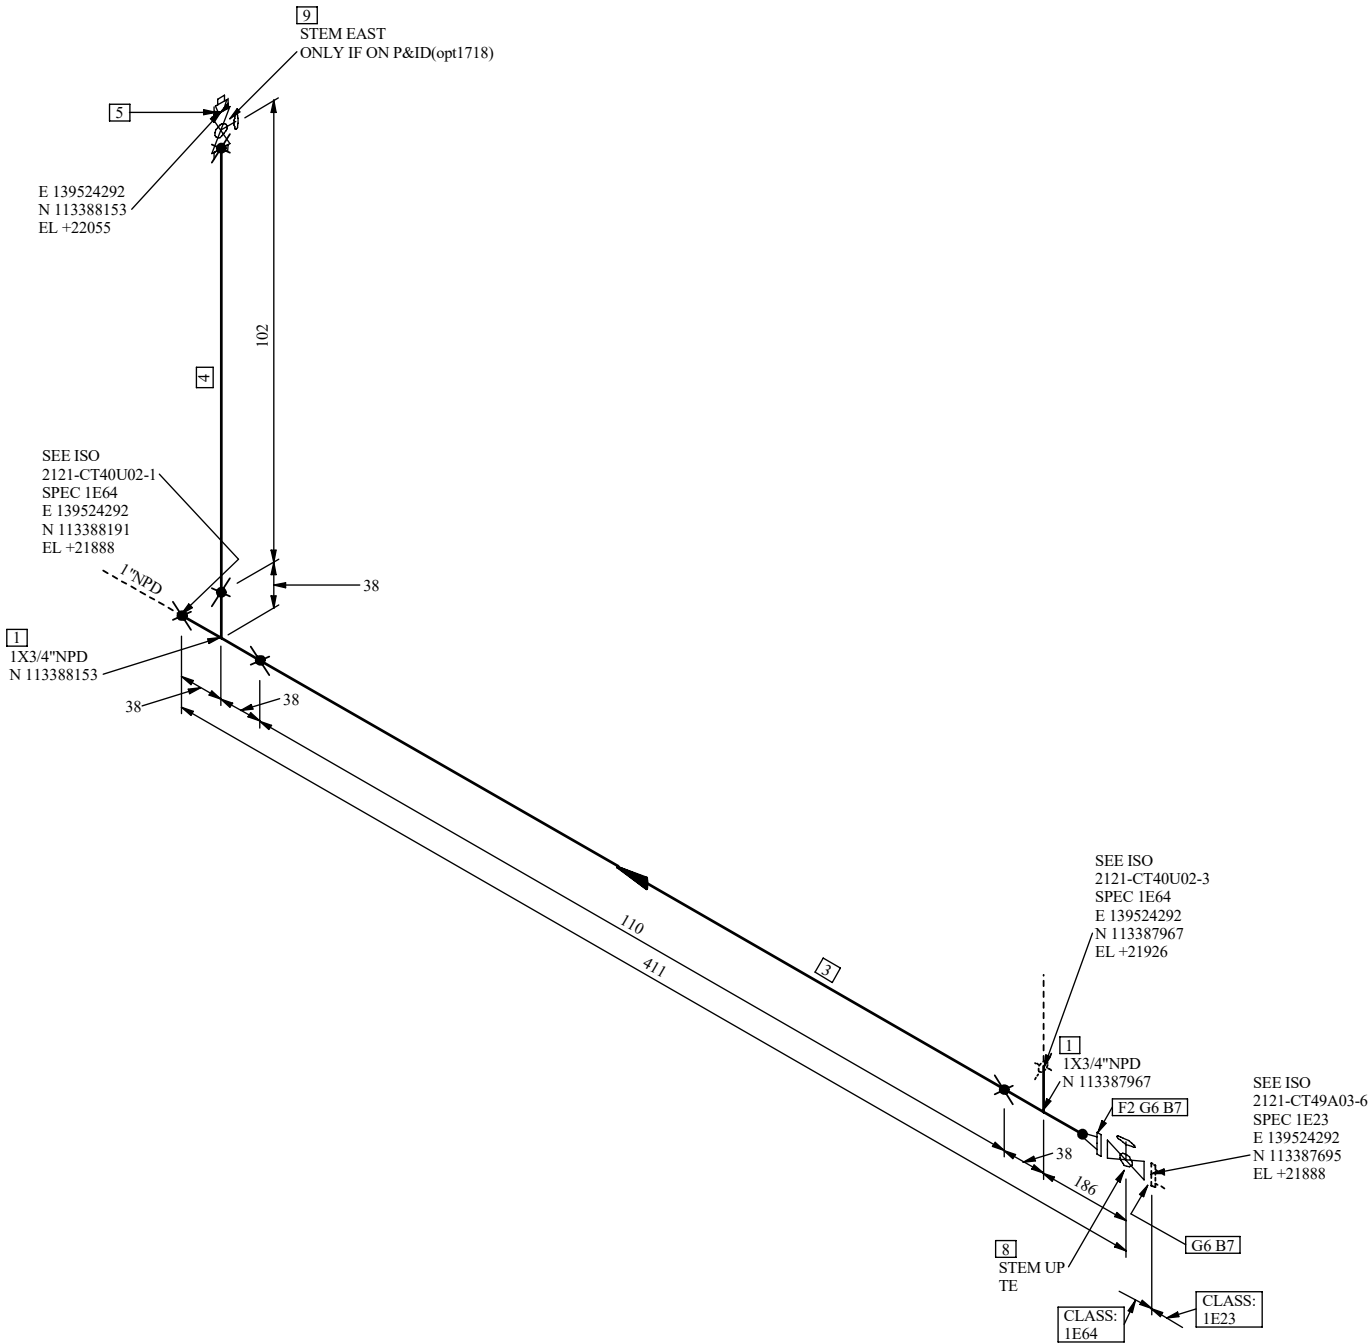

REMARKS FOR MECHANICAL SUBCONTRACTOR:

- 1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.
2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.
3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT
4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.
6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.
7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.
8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603).
9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.

SUPPORTS LEGEND:  DENOTES PARTS LIST NO PIPE SUPPORT  A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD
WHERE  WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

							STRESS CALC. N° -
							P & ID 19-A-19-000-1-01-00001 sheet 48
00	ISSUED FOR REFERENCE	07-JUL-23	U.CHAVAN	P.VAZE	G.PAGANONI		LINE LIST N° 19-L-19-000-2-00-80602
REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT	PIPE LAYOUT N° 19-L-19-000-2-00-86196 sheet 6

ISSUED FOR
REFERENCE


Signature for construction is shown
on Iso list of relevant CWA

TITLE
ISOMETRIC DRAWING
LINE

1"-CT-40U02-1E64

BILL OF MATERIAL

PT NO	COMPONENT DESCRIPTION	N.S. (IN)	ITEM CODE	QTY	HOLD STATUS
FITTINGS					
1	REDUCING TEE ASME B16.9 A234-WPB BE SMLS C32DC04V02 S-XS x <TRBA200F312161116> (L-9918)	1X3/4	1369096	2	
FLANGES					
2	WN FLANGE ASME B16.5 300# A105N RFFE BE 125 - 250 AARH F01CFC44BV05 S-XS <WNFA300R351XS> (L-236)	1	14217849	1	
PIPE					
3	PIPE - A106-B PE SMLS T01AC03Z02 S-XS <PIPA010A11XS> (L-6679)	1	1132793	0.2 M	
4	PIPE - A106-B PE SMLS T01AC03Z02 S-XS <PIPA010A13/4XS> (L-6679)	3/4	1132785	0.1 M	
FITTINGS					
5	PLUG ROUND HEAD ASME B16.11 - A105N MTE NREQD - R42FQC44W001 NREQD <PLUA300CK3/4> (L-77)	3/4	110088232	1	
GASKETS					
6	SPIRAL WOUND GASKET ASME B16.20 300# RFFE 304/PTFE CARBON STEEL SS 304 ASME B16.5 G03GFB11G12 <SPAQ50SR3EA1> (L-SPA05)	1	163598746	2	
BOLTS					
7	STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 <SB2R51G5/831/4> - 2 NUTS PER BOLT - 80 mm Length	5/8	153437418	8	
VALVES / IN-LINE ITEMS					
8	BALL VALVE API 608 300# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 AARH 2PSB-FULL BORE FLOATING BALL OHW ASME B16.5 V04JFC29BZZG NREQD <B41L-AL084> (L-AL084)	1	19918107	1	
9	BALL VALVE ASME B16.34 800# A105N SWE FTE 316/R-PTFE, GF 3PSB-RED BORE FLOATING BALL OHW FIRE SAFE :API 607 & ANTISTATIC DEVICES "A60T series" TEAL V04JIC44126IG NREQD <N/A> (N/A)	3/4	166567923	1	

PIPE MATERIAL		NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102. 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021. 4. PAINTING ACCORDING TO 45-A-45-000-1-00-20160. 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "~N/A~" MEANS UNICODE IS "NOT AVAILABLE".			
CS					
HEAT TREATMENT (PWHT)					
N					
PAINTING SCHEME (3)		CONTRACTOR: 	CONTRACTOR DRAWING NUMBER: 4274-XH-DL-2121CT40U02-2	PROJECT: 4001008	
1					
PIPING CLASS		<div>LOW LINEAL DENSITY POLYETHYLENE (PEL) AND POLYPROPYLENE (PP) PLANTS FOR PROJECT - ALBA PROJECT</div> <div>CLIENT / COMPLEX REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX</div>			
1E64					
WELDING CLASS (4)					
A-5					
PED CATEGORY					
Art 4.3					
INSULATION CODE / THK. (mm)		ANNEX 19	SPEC. L	DRAWING NUMBER 19-000-2-02-00001 sheet 2121CT40U02-2	REV. 00
N 0					