REV.

SUPPORTS LEGEND:

ISSUED FOR REFERENCE

REMARKS FOR MECHANICAL SUBCONTRACTOR:

1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.

DESCRIPTION

CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED


2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION. 3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ★, ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT

4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002

I DENOTES PARTS LIST NO PIPE SUPPORT —

(7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.

8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603

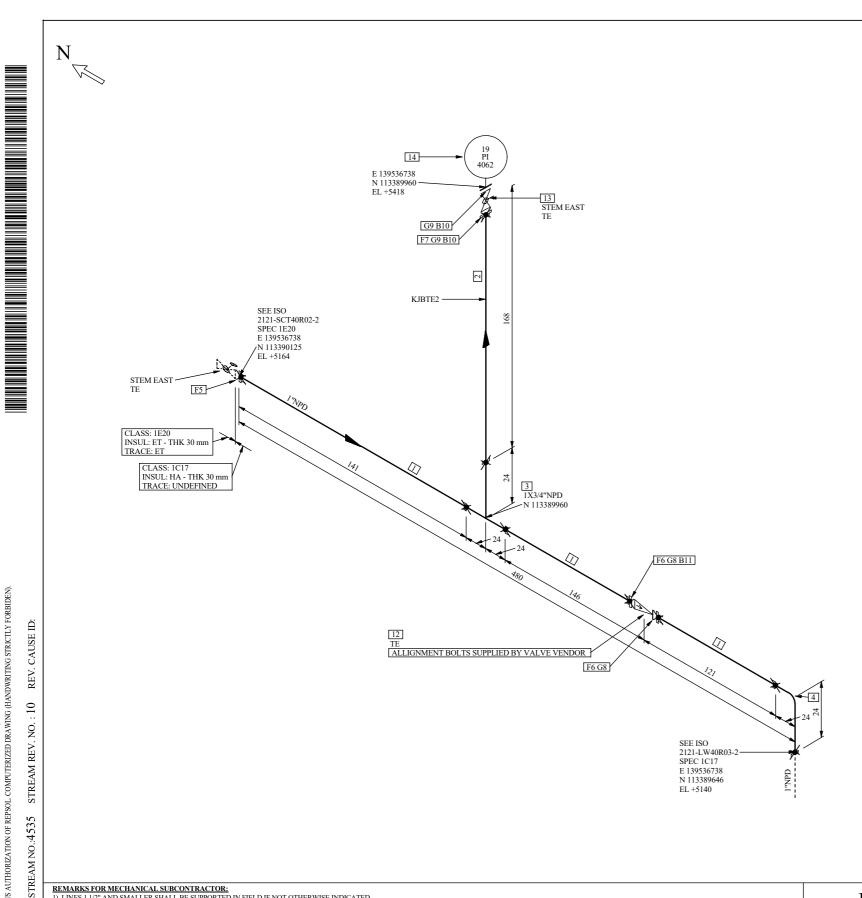

A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD WHERE[A] WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

P.VAZE

CHECK BY

G.PAGANONI

APPR. BY

04-SEP-23

U.CHAVAN

TRESS CALC. No

PIPE LAYOUT No

APPR. CLIENT

19-A-19-000-1-01-00001 sheet 46

19-L-19-000-2-00-86197 sheet 2

19-L-19-000-2-00-80602

BILL OF MATERIAL HOLD COMPONENT DESCRIPTION ITEM CODE QTY (IN) STATUS PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A11XS > (L-6679) I132793 0.4 M PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A13/4XS > (L-6679) I132785 0.1 M REDUCING TEE ASME B16.11 3000# A105N SWE SWE - R12FNC441101 NREQD 1X3/4 I1651305 <RTEA300KBK13/4> (L-RTE15) 90 ELBOW ASME B16.11 3000# A105N SWE SWE - R31FNC441103 NREOD I1651296 <90FA300LBK1>(L-178) SW FLANGE ASME B16.5 300# A105N RFFE SWE 125 - 250 AARH F02CFC44B105 S-XS I4217823 SW FLANGE ASME B16 5 150# A105N RFFE SWE 125 - 250 AARH F02CDC44B105 S-XS 15378343 <SWFA300R151XS> (L-295) SW FLANGE ASME B16.5 150# A105N RFFE SWE 125 - 250 AARH F02CDC44B105 S-XS 15378342 <SWFA300R153/4XS> (L-295) SPIRAL WOUND GASKET ASME B16.20 150# RFTBE 304/GRAFOIL CARBON STEEL SS 304 163508896 SPIRAL WOUND GASKET ASME B16.20 150# RFTBE 304/GRAFOIL CARBON STEEL SS 304 3/4 163508895 ASME B16.5 G03GDP1IS12 <N/A> (N/A) I53437190 0 STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 <SB2R51G1/221/2> - 2 NUTS PER BOLT - 65 mm Length STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 153437245 <SB2R51G1/231/2> - 2 NUTS PER BOLT - 90 mm Length VALVES / IN-LINE ITEMS 2 DISC CHECK WFR VALVE ASME B16.34 150# A216-WCB RFTBE 316/R-PTFE, GF 125 -I10016148 250 AARH SL VERTICAL&HORIZONTAL CRACK. PRESS. 1/2 PSI ASME B16.5 V40JDC29P01 NREQD < N/A > (N/A) BALL VALVE API 608 150# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 AARH I10013686 2PSB-FULL BORE FLOATING BALL OHW ASME B16.5 V04JDC29BZZG NREQD <N/A> (N/A) 14 INSTRUMENT COMPONENT 19-PI-4062 PIPE MATERIAL NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102 CS 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021 HEAT TREATMENT (PWHT) 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE" PAINTING SCHEME (3) CONTRACTOR: CONTRACTOR DRAWING NUMBER: PROJECT: 4001008 PIPING CLASS 4274-XH-DL-2121LW40R03-1 1C17 WELDING CLASS (4) LOW LINEAL DENSITY POLYETHILENE (PEL) CLIENT / COMPLEX AND POLYPROPYLENE (PP) PLANTS REPSOL POLYMEROS/ PED CATEGORY FOR PROJECT - ALBA PROJECT SINES INDUSTRIAL COMPLEX Art 4.3 REPSQL INSULATION CODE / THK. (mm) DRAWING NUMBER ANNEX 00

ISSUED FOR

REFERENCE

LINE

1"-LW-40R03-1C17 (HA)