


Realistic View

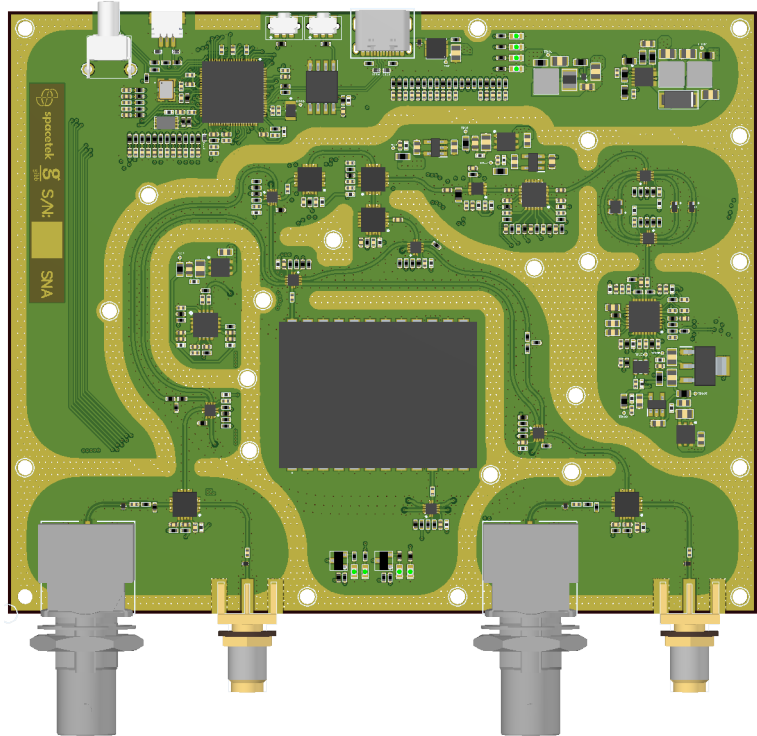

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
Surface Material	Top Solder 1	0.01mm	Solder Resist	Solder Mask	GTS
Copper	L1 Top Layer	0.04mm		Signal	GTL
Prepreg		0.21mm	Prepreg	Dielectric	
Copper	L2 Inner 1	0.02mm		Signal	G1
Core		1.06mm	FR4	Dielectric	
Copper	L3 Inner 2	0.02mm		Signal	G2
Prepreg		0.21mm	Prepreg	Dielectric	
Copper	L4 Bottom Layer	0.04mm		Signal	GBL
Surface Material	Bottom Solder 1	0.01mm	Solder Resist	Solder Mask	GBS
Total thickness: 1.61mm					

Transmission Line Structure Table

Impedance Id	Transmission Line	Target Impedance	Calculated Impedance	Trace layer	Wide Trace Width	Narrow Trace Width	Reference layers	Substack	Clearance	Target Tolerance
1	Coated Coplanar Waveguide With Ground	50	49.55	L1 Top Layer	0.32mm	0.32mm	L2 Inner 1	Board Layer Stack	0.25mm	10%
2	Coated Coplanar Waveguide With Ground	75	75.71	L1 Top Layer	0.13mm	0.13mm	L2 Inner 1	Board Layer Stack	0.38mm	10%
3	Diff Coated Coplanar Waveguide With Ground	90	90.92	L1 Top Layer	0.23mm	0.23mm	L2 Inner 1	Board Layer Stack	0.18mm	10%
4	Coated Coplanar Waveguide With Ground	50	49.55	L4 Bottom Layer	0.32mm	0.32mm	L3 Inner 2	Board Layer Stack	0.25mm	10%
5	Coated Coplanar Waveguide With Ground	75	75.71	L4 Bottom Layer	0.13mm	0.13mm	L3 Inner 2	Board Layer Stack	0.38mm	10%
6	Diff Coated Coplanar Waveguide With Ground	90	89.99	L4 Bottom Layer	0.19mm	0.19mm	L3 Inner 2	Board Layer Stack	0.13mm	10%

VERTRAULICH CONFIDENTIAL Copyright by Spacetek Technology AG. Für dieses Dokument behalten wir uns alle Rechte vor. We reserve all rights in respect of this document.

Spacetek Technology AG Gibb Spacetek, Gümligen Gibb, Bern 	Project: SNA		Number: SNA		Git:	
			Variant: EMS		Version: 1.0	
	Board: SNA		Release: 03.09.2026	Sheet 1 of 1	Design: ML	
				Size: A3	Check: ML	
	Page: HW Docs					
File: https://github.com/ml3rc/SNA.git SNA.PCBDwf						