

Realistic View

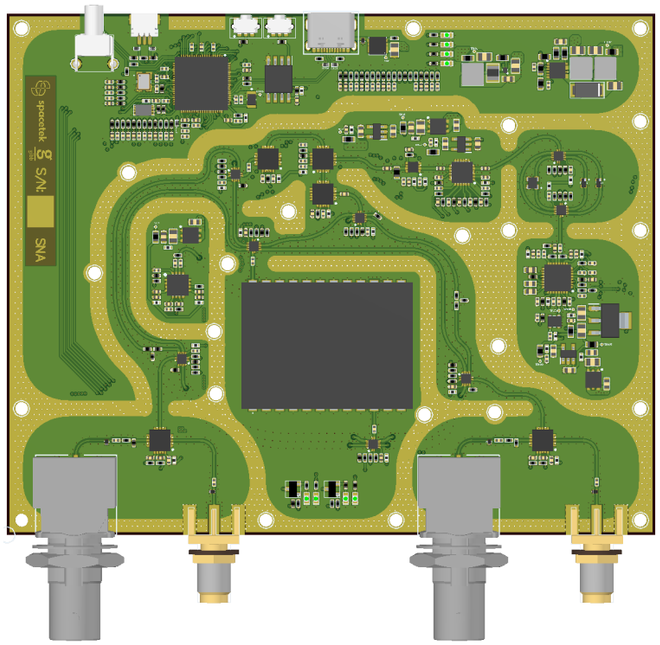

Layer Stack Legend

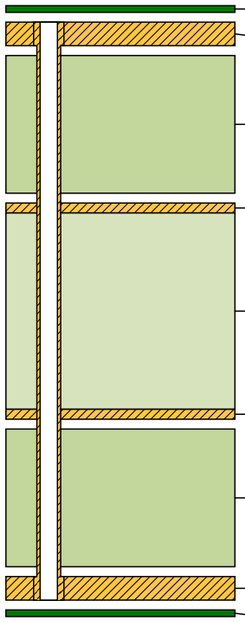

Material	Layer	Thickness	Dielectric Material	Type	Gerber
Surface Material	Top Solder 1	0.01mm	Solder Resist	Solder Mask	GTS
Copper	**L1 Top Layer**	**0.04mm**		**Signal**	**GTL**
Prepreg		*0.21mm*	*Prepreg*	*Dielectric*	
Copper	**L2 Inner 1**	**0.02mm**		**Signal**	**G1**
Core		*1.06mm*	*FR4*	*Dielectric*	
Copper	**L3 Inner 2**	**0.02mm**		**Signal**	**G2**
Prepreg		*0.21mm*	*Prepreg*	*Dielectric*	
Copper	**L4 Bottom Layer**	**0.04mm**		**Signal**	**GBL**
Surface Material	Bottom Solder 1	0.01mm	Solder Resist	Solder Mask	GBS

Total thickness: 1.61mm

Transmission Line Structure Table

Impedance Id	Transmission Line	Target Impedance	Calculated Impedance	Trace layer	Wide Trace Width	Narrow Trace Width	Reference layers	Substack	Clearance	Target Tolerance
1	Coated Coplanar Waveguide With Ground	50	49.55	L1 Top Layer	0.32mm	0.32mm	L2 Inner 1	Board Layer Stack	0.25mm	10%
2	Coated Coplanar Waveguide With Ground	75	75.71	L1 Top Layer	0.13mm	0.13mm	L2 Inner 1	Board Layer Stack	0.38mm	10%
3	Diff Coated Coplanar Waveguide With Ground	90	90.92	L1 Top Layer	0.23mm	0.23mm	L2 Inner 1	Board Layer Stack	0.18mm	10%
4	Coated Coplanar Waveguide With Ground	50	49.55	L4 Bottom Layer	0.32mm	0.32mm	L3 Inner 2	Board Layer Stack	0.25mm	10%
5	Coated Coplanar Waveguide With Ground	75	75.71	L4 Bottom Layer	0.13mm	0.13mm	L3 Inner 2	Board Layer Stack	0.38mm	10%
6	Diff Coated Coplanar Waveguide With Ground	90	89.99	L4 Bottom Layer	0.19mm	0.19mm	L3 Inner 2	Board Layer Stack	0.13mm	10%

VERTRAULICH CONFIDENTIAL Copyright by Spacetek Technology AG. Für dieses Dokument behalten wir uns alle Rechte vor. We reserve all rights in respect of this document.

Spacetek Technology AG | Gibb
Spacetek, Gümligen
Gibb, Bern

Project:	**SNA**	**Number:**	**SNA**		**Git:**
Board:	**SNA**	**Variant:**	**EMS**		**Version:** **1.0**
Page:	**HW Docs**	**Release:**	**03.09.2026**	**Sheet 1 of 1**	**Design:** **ML**
				Size: **A3**	**Check:** **ML**

File: https://github.com/ml3rc/SNA.git SNA.PCBDwf