



TUBE-FILLER -- FRAME WELDMENT

All members PTR 51 x 51 x 3.05 (2" square, cal-11). Dimensions in mm. BUILD TO THE NUMBERS, NOT THE PICTURE.  
Machine datum x=0 is the FRONT FACE of the adapter plate. +x is toward the discharge. z is up from the ground. NO MOTOR: a 1/2" paddle dri

VIEW A -- SIDE ELEVATION (near frame + centreline drill station)

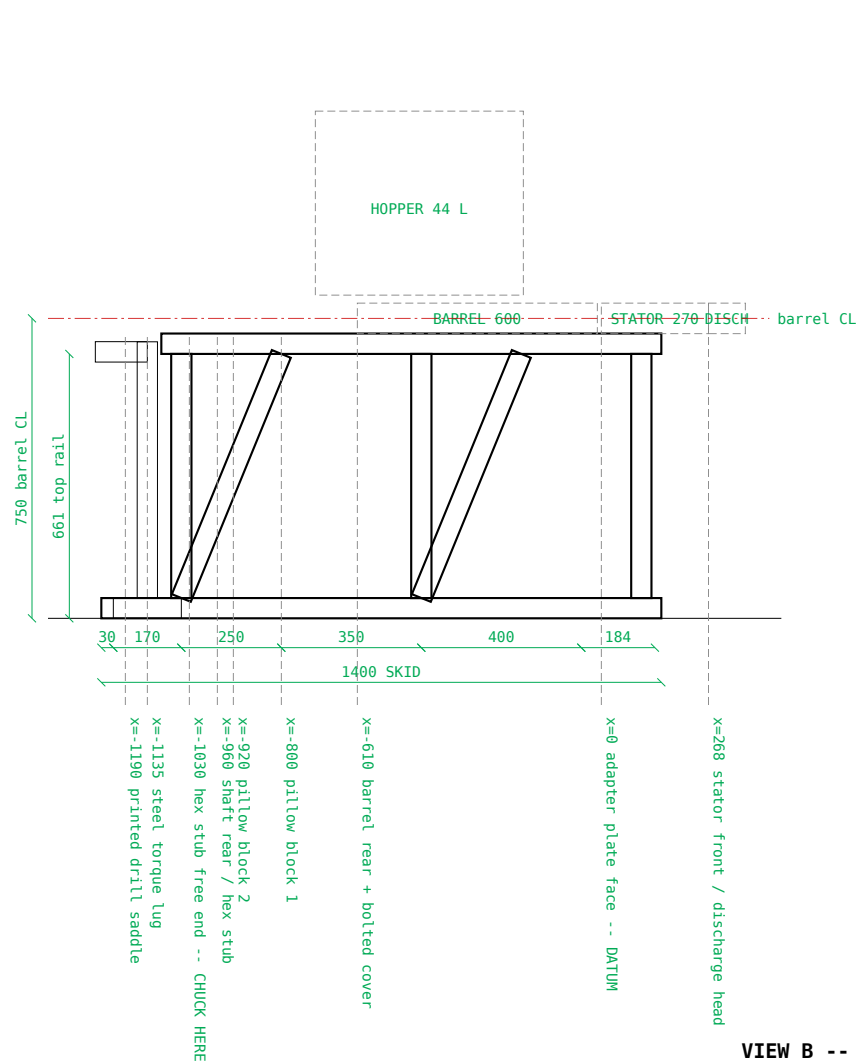

VIEW B -- PLAN (skid heavy, top rails light)

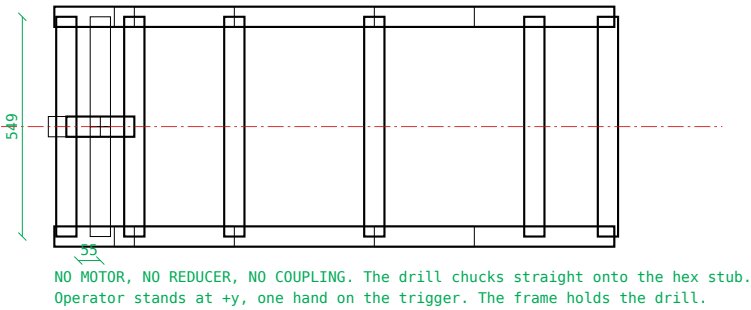

CUT LIST (sq

| QTY            | LENGTH | MEMI      |
|----------------|--------|-----------|
| 2              | 1400   | skid ra   |
| 2              | 1250   | top rai   |
| 2              | 697    | drill bra |
| 4              | 660    | knee bra  |
| 1              | 641    | drill up  |
| 6              | 610    | leg PTR   |
| 6              | 549    | skid cro  |
| 3              | 549    | top cro   |
| 1              | 170    | drill ra  |
| 1              | 130    | cradle o  |
| 18.9 TOTAL PTR |        |           |

- WELD NOTES (3.0
- 4 mm fillet
  - 7018 at 80-9
  - through -- the
  - Tack the whe
  - Weld the top
  - frame, is the
  - Saddles: 2
  - Pillow-block
  - drive train ca
  - Lifting eye
  - DRILL STATIO
  - its FRONT face
  - ONLY torque pa
  - outrigger and
  - Weld both drill
  - 1160 N reaction
  - Paint every