

SYSTEM OVERVIEW: OLCF SUMMIT

MOCHIBOOTCAMP

ECP Annual Meeting






SUMMIT

- 200 PF [HPL I presume]
- 4608 Nodes
- 2 POWER9 CPU per node (9,216 total)
- 6 NVIDIA Volta per node (27,648 total)
- Mellanox EDR Infiniband
- 1600 GB NVRAM per node
- 250 PB GPFS, 2.5 TB/sec advertised bandwidth









JOB SUBMISSION

- Three kinds of nodes on summit:
 - Login: everyone starts here
 - Launch: service nodes. Shared among all users (play nice)
 - Compute: where all the fun happens. Users request an allocation of compute nodes from the LSF scheduler (via bsub) and run commands on those nodes with jsrun
- Check job with bjobs
- Interactive example:









RESOURCE SETS

- Lots of ways to carve up nodes allocated with 'bsub'
- "Resource Sets" describe how many cores/threads per node to use
 - e.g. "One GPU per task" vs
 - "I will manage GPU and CPU resources myself"
- Our Mochi services will run with one resource set per node
 - bsub -nnodes=2...
 - jsrun -n 1 -a 1 -c ALL_CPUS -g ALL_GPUS
 - Your own code might demand other layout.

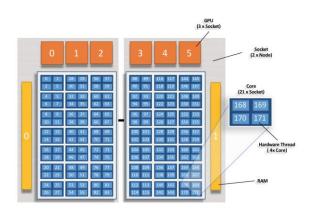







SUMMIT NETWORKING

The "Multi-rail" bonus exercise

- 2 CPU per node, 1 network card (HCA)
- Each node sees 4 Infiniband ports
- Careful selection will result in one CPU driving both HCA ports
- Otherwise, will only see about half of advertised performance
- See if you can find the right value/config for FI_OFI_MRAIL_ADDR


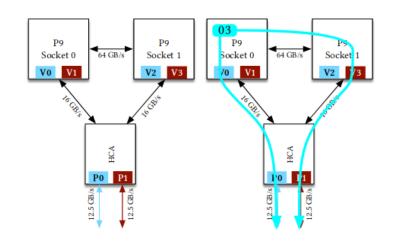


Figure 2: The left image shows the mapping of virtual to physical ports for both sockets. The right image shows socket 0 striping data over virtual ports V0 and V3.

Image from Zimmer, Atchley, et. al "An evaluation of the CORAL interconnects", SC2019








SUMMIT STORAGE

- 1.6 TB NVRAM
 - /mnt/bb/\$USER
 - Request with -alloc_flags NVME
 - Only supports file-per-process or fileper-node
 - 'Spectral' library can help with stage-in and stage-out
- 250PB SpectrumScale (GPFS)
 - /gpfs/alpine
 - Usual GPFS behavior
 - File per process will take "forever"
 - Shared file writes require 16 MiB block alignment

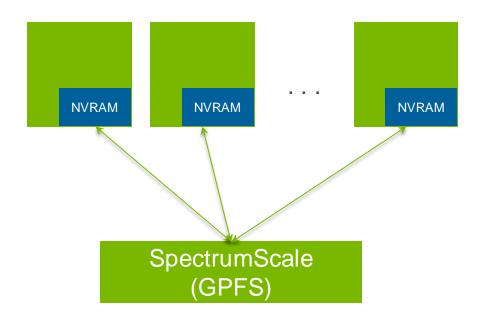







SPACK ON SUMMIT

- Just highlighting Summit-specific information: hopefully you already did the homework!
- Libfabric: use verbs variant, not ucx to drive infiniband

libfabric:


variants: fabrics=verbs,rxm,mrail

• Almost everything you need is available as a module.

automake:
 modules:
 automake@1.16.1: automake/1.16.1
buildable: False

.. but there's a bug with cmake, so build that one yourself







RESOURCES

- https://docs.olcf.ornl.gov/systems/summit_user_guide.html
 - One-stop survey of just about anything you need
- https://dl.acm.org/doi/10.1145/3295500.3356166
 - In-depth study of Summit (and Sierra) networking
- https://ofiwg.github.io/libfabric/master/man/fi_mrail.7.html
 - Libfabric documentation for the "multi-rail" protocol
- https://www.olcf.ornl.gov/wpcontent/uploads/2018/12/spectrum_scale_summit_workshop.pdf
 - Lots of Spectrum-Scale (GPFS) tuning parameters





