

Welcome

Thank you for choosing Freenove products!

About Battery

First, read the document [About_Battery.pdf](#) in the unzipped folder.

If you did not download the zip file, please download it and unzip it via link below.

https://github.com/Freenove/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/archive/master.zip

Get Support and Offer Input

Freenove provides free and responsive product and technical support, including but not limited to:

- Product quality issues
- Product use and build issues
- Questions regarding the technology employed in our products for learning and education
- Your input and opinions are always welcome
- We also encourage your ideas and suggestions for new products and product improvements

For any of the above, you may send us an email to:

[**support@freenove.com**](mailto:support@freenove.com)

Safety and Precautions

Please follow the following safety precautions when using or storing this product:

- Keep this product out of the reach of children under 6 years old.
- This product should be used only when there is adult supervision present as young children lack necessary judgment regarding safety and the consequences of product misuse.
- This product contains small parts and parts, which are sharp. This product contains electrically conductive parts. Use caution with electrically conductive parts near or around power supplies, batteries and powered (live) circuits.
- When the product is turned ON, activated or tested, some parts will move or rotate. To avoid injuries to hands and fingers, keep them away from any moving parts!
- It is possible that an improperly connected or shorted circuit may cause overheating. Should this happen, immediately disconnect the power supply or remove the batteries and do not touch anything until it cools down! When everything is safe and cool, review the product tutorial to identify the cause.
- Only operate the product in accordance with the instructions and guidelines of this tutorial, otherwise parts may be damaged or you could be injured.
- Store the product in a cool dry place and avoid exposing the product to direct sunlight.
- After use, always turn the power OFF and remove or unplug the batteries before storing.

About Freenove

Freenove provides open source electronic products and services worldwide.

Freenove is committed to assist customers in their education of robotics, programming and electronic circuits so that they may transform their creative ideas into prototypes and new and innovative products. To this end, our services include but are not limited to:

- Educational and Entertaining Project Kits for Robots, Smart Cars and Drones
- Educational Kits to Learn Robotic Software Systems for Arduino, Raspberry Pi and micro:bit
- Electronic Component Assortments, Electronic Modules and Specialized Tools
- **Product Development and Customization Services**

You can find more about Freenove and get our latest news and updates through our website:

<http://www.freenove.com>

Copyright

All the files, materials and instructional guides provided are released under [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Unported License](#). A copy of this license can be found in the folder containing the Tutorial and software files associated with this product.



This means you can use these resources in your own derived works, in part or completely, but **NOT for the intent or purpose of commercial use.**

Freenove brand and logo are copyright of Freenove Creative Technology Co., Ltd. and cannot be used without written permission.



Raspberry Pi® is a trademark of Raspberry Pi Foundation (<https://www.raspberrypi.org/>).

Contents


Welcome	1
Contents	1
List	1
Spider Shield for Raspberry Pi	1
Machinery Parts	2
Transmission Parts	3
Acrylic Parts	3
Electronic Parts	4
Tools	6
Calibration Graph	7
Required but NOT Contained Parts	8
Preface	9
Raspberry Pi Introduction	10
Chapter 0 Raspberry Pi Preparation	20
Install a System	20
Getting Started with Raspberry Pi	30
Spider Shield for Raspberry Pi	40
Chapter 1 Installation of Python Libraries(Important)	42
Step 1 Obtain the Code	42
Step 2 Configuration	45
Step 3 Execute the Installed Program	48
Chapter 2 Assembly of the Robot (Important)	49
Step 1 Installing Servo Base	49
Step 2 Installing Servos	51
Step 3 Assembling the center of the body	55
Step 4 Installing Battery Holder	61
Step 5 Assembling Legs and Head to the Body	63
Step 6 Installing Base and Cover Plates	74
Chapter 3 Module Test (necessary)	75
Chapter 4 Hexapod Robot	87
Server	88
Client	95
Free your innovation	118
Android and iOS app	123
What's Next?	124

List


We will help you with any concerns via support@freenove.com

Spider Shield for Raspberry Pi

Top

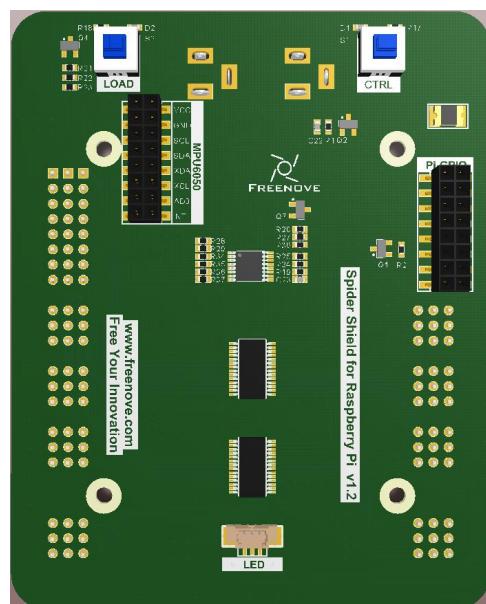

Bottom

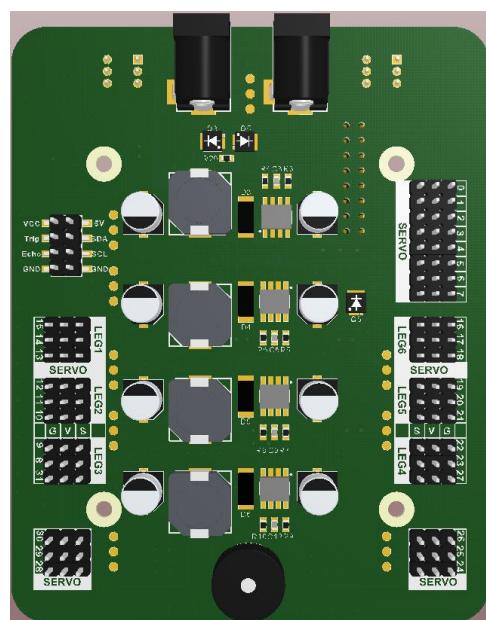

Machinery Parts

 M3*55 Copper Standoff x8 Freenove	 M3*30 Copper Standoff x6 Freenove	 M3*20 Copper Standoff x6 Freenove	 M2.5*8 Copper Standoff x6 Freenove	 M1.8*8 Screw x80 Freenove	 M1.4*6 Screw x12 Freenove
 M4*14 Screw x74 Freenove	 M3*12 Screw x40 Freenove	 M2.5*8 Screw x10 Freenove	 M2*16 Screw x8 Freenove	 M3*10 Sunk Screw x10 Freenove	 M4 Non-slip nuts x74 Freenove
 M3 Nut x20 Freenove	 M2 Nut x8 Freenove				

Transmission Parts


Servo package 1 x18



Servo package 2 x2






Acrylic Parts

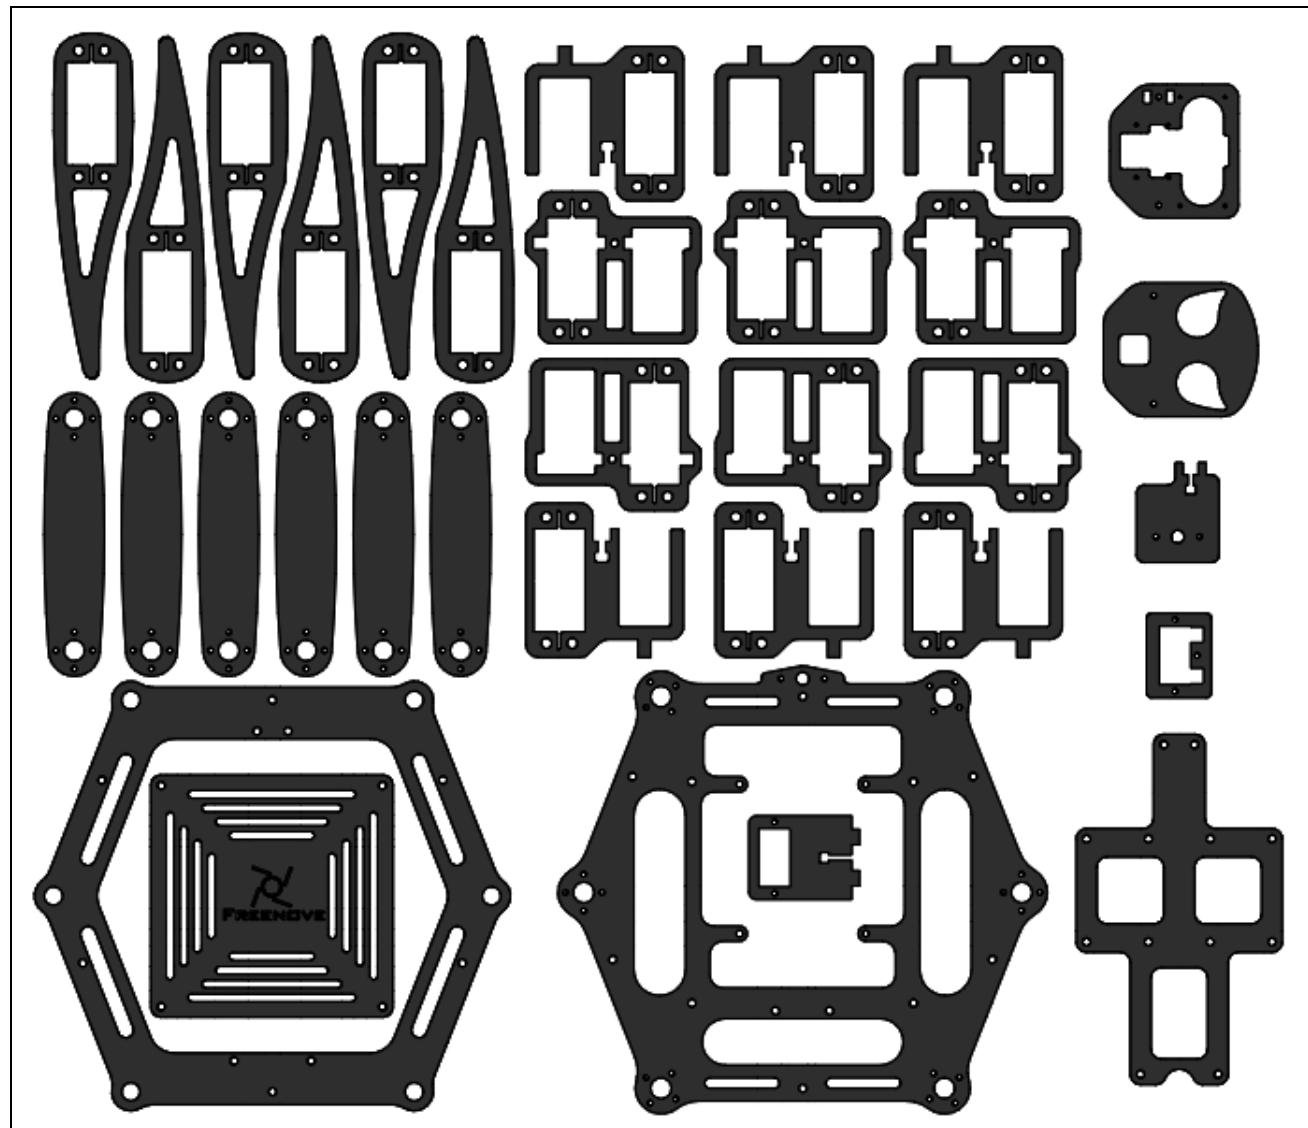

Electronic Parts

Please note: There are two models of connection boards, remember their version numbers.

LED module x1 	Camera x1 	HC-SR04 Ultrasonic Module x1 
Connection board (PCB_V1.0) 	Connection board (PCB_V2.0) Not yet available for sale 	

Note:


The PCB Version 2 is not on sale yet. They are current at our warehouse. The only distinction between Version 1 and Version 2 of the adapter board lies in the modification of the LED control pin.

Version 1 employs GPIO18, whereas Version 2 has switched to GPIO10.

Due to significant changes in the Raspberry Pi 5, the library rpi-ws281x-python is unable to function properly. This library was designed to work with GPIO18, and the lack of detailed documentation on the RP1 chip from the Raspberry Pi authorities has hindered the resolution of this issue.

Consequently, we have introduced an alternative approach, utilizing the SPI MOSI pin for communication with the LED lights. Although this restored the functionality of the LEDs, it also meant that SPI-related pins (SCK, MISO) could not be used for other purposes. This serves as an interim measure, and once the rpi-ws281x-python library resumes normal functionality on pi 5, Version 2 is expected to be phased out.

If you want to achieve the function of V2, you can connect GPIO10 to GPIO18 with a jumper wire, as shown below.

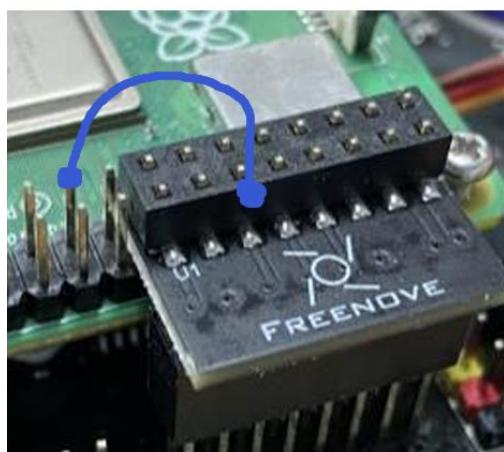

Jumper Wire F/F(4) x1



1.25mm 3Pin LED cable (same direction) x1



FPC 25cm 15Pin camera cable (reversed direction) x1




FPC soft line x1



Please note that this cable only come with the purchase of the Raspberry Pi 5 version.


Battery holder x2

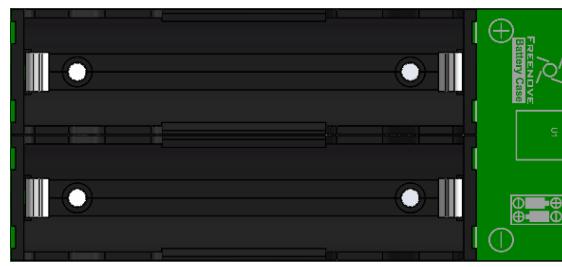

Tools

Cross screwdriver (2mm) x1	 A black cross-head screwdriver with a black handle and a 2mm bit.
Cross screwdriver (4.5mm) x1	 A red cross-head screwdriver with a red handle and a 4.5mm bit.
Cable Tidy x150cm	 A black flexible cable tidy, approximately 150cm long, coiled on a white background.
Multifunctional Spanner x1	 A silver multi-functional spanner with a T-shaped head and multiple internal sockets.

Calibration Graph

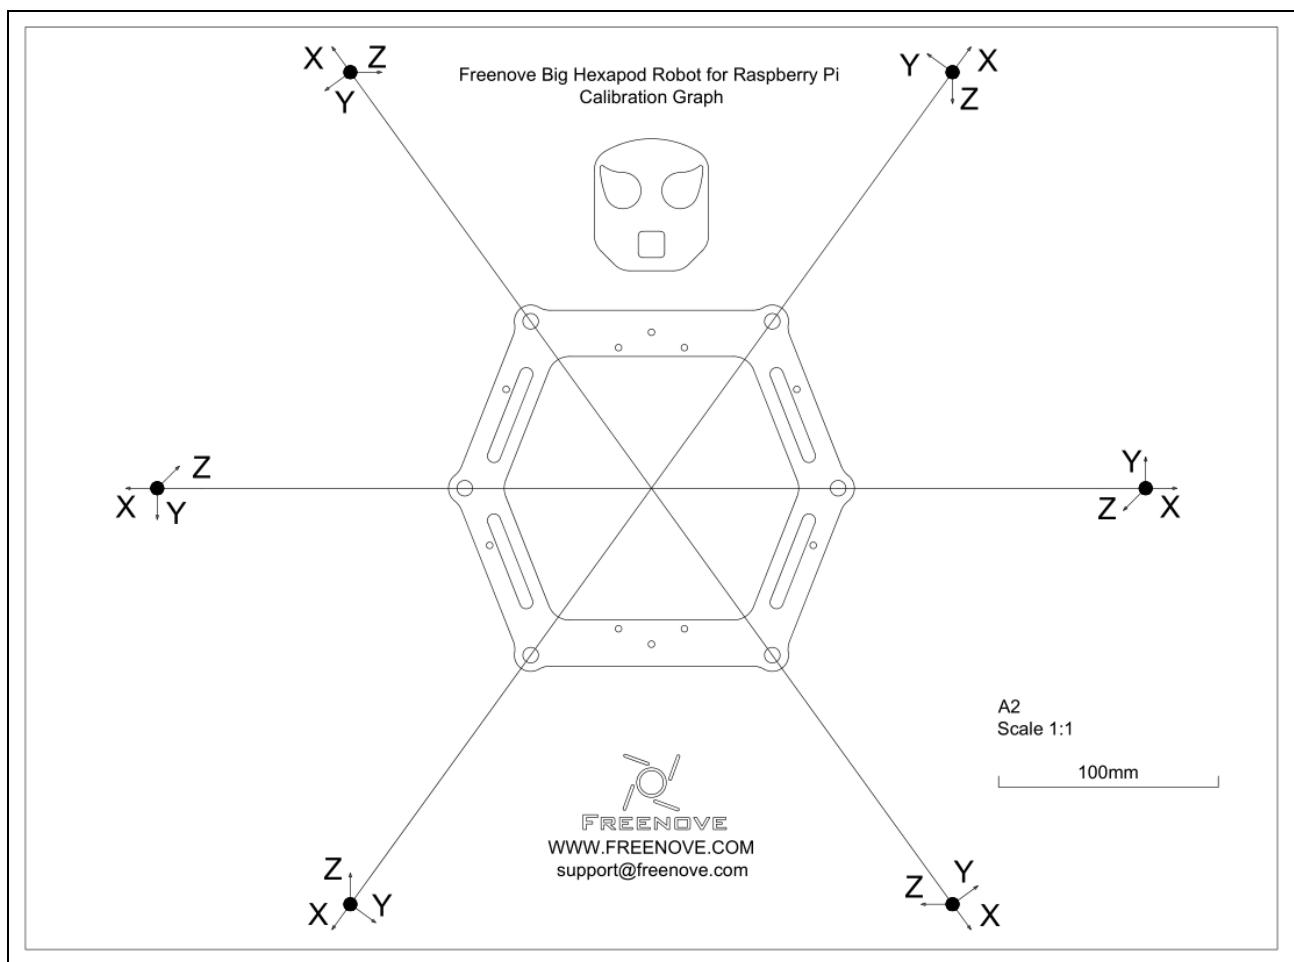


Required but NOT Contained Parts


Four 18650 lithium batteries without protection board. Discharge current is greater than 15A




Raspberry Pi (Recommended model: Raspberry 5 / 4B / 3B+) x1

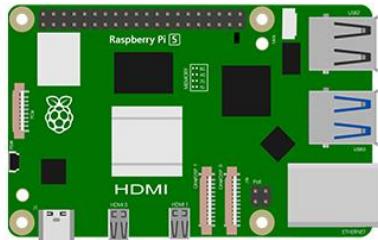

Raspberry Pi 5

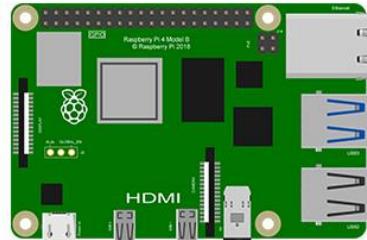

Raspberry Pi 4 Model B

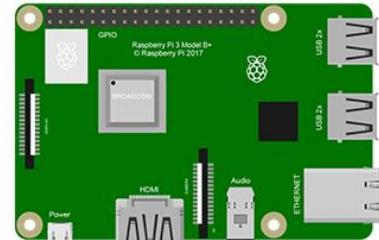

Raspberry Pi 3 Model B+

Preface

Welcome to use this robot. Following this tutorial, you can make a very cool robot with many functions.

This kit is based on Raspberry Pi, a popular control panel, so you can share and exchange your experience and design ideas with many enthusiasts all over the world. The parts in this kit include all electronic components, modules, and mechanical components required for making the smart car. And all of them are packaged individually. There are detailed assembly and commissioning instructions in this book.

And if you encounter any problems, please feel free to contact us for fast and free technical support.

support@freenove.com

The contents in this book can help enthusiasts with little technical knowledge to make a robot. If you are very interested in Raspberry Pi, and want to learn how to program and build the circuit, please visit our website www.freenove.com or contact us to buy the kits designed for beginners:

Freenove Basic\LCD1602\Super\Ultrasonic\RFID\Ultimate Starter Kit for Raspberry Pi

 support@freenove.com


Raspberry Pi Introduction

Raspberry Pi (called RPi, RPI, RasPi, the text these words will be used alternately later), a micro-computer with size of a card, quickly swept the world since its debut. It is widely used in desktop workstation, media center, smart home, robots, and even the servers, etc. It can do almost anything, which continues to attract fans to explore it. Raspberry Pi used to be running with Linux system and along with the release of windows 10 IoT. We can also run it with Windows. Raspberry Pi (with interfaces USB, network, HDMI, camera, audio, display and GPIO), as a microcomputer, can be running in command line mode and desktop system mode. Additionally, it is easy to operate just like Arduino, and you can even directly operate the GPIO of CPU.

So far, at this writing, Raspberry Pi has advanced to its fifth generation product offering. Version changes are accompanied by increases in upgrades in hardware and capabilities.

The A type and B type versions of the first generation products have been discontinued due to various reasons. What is most important is that other popular and currently available versions are consistent in the order and number of pins and their assigned designation of function, making compatibility of peripheral devices greatly enhanced between versions.


Below are the raspberry pi pictures and model pictures supported by this product. They have 40 pins.

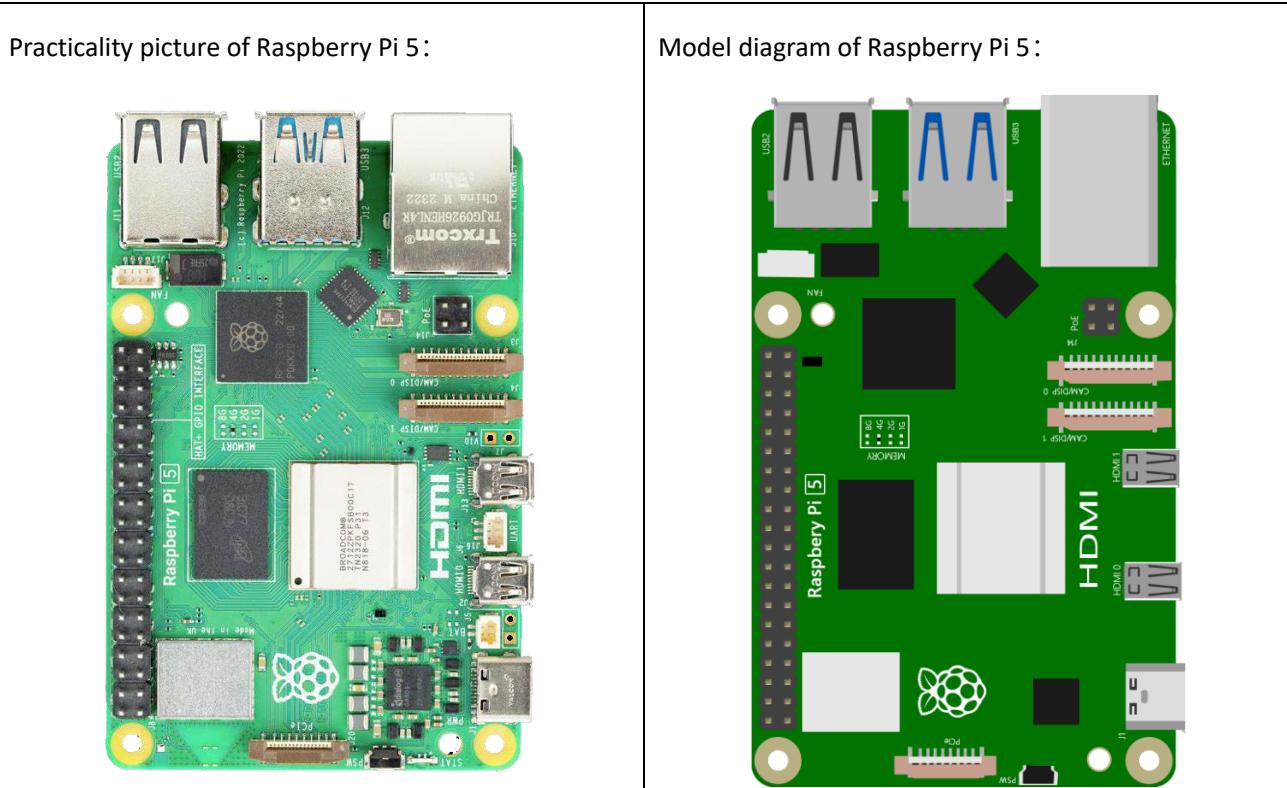

Actual image of Raspberry Pi 4 Model B:




CAD image of Raspberry Pi 4 Model B:

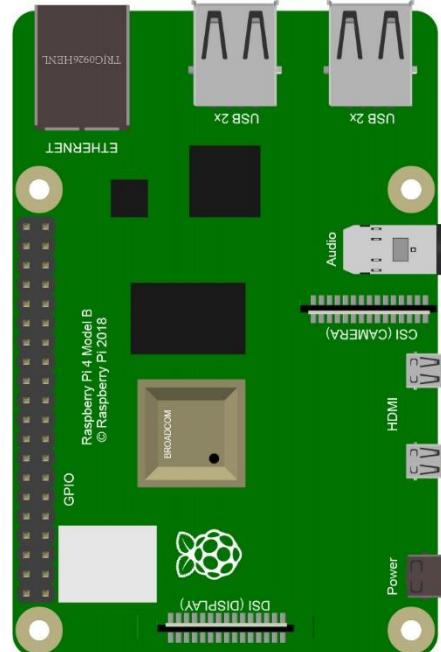

Actual image of Raspberry Pi 3 Model B+:




CAD image of Raspberry Pi 3 Model B+:

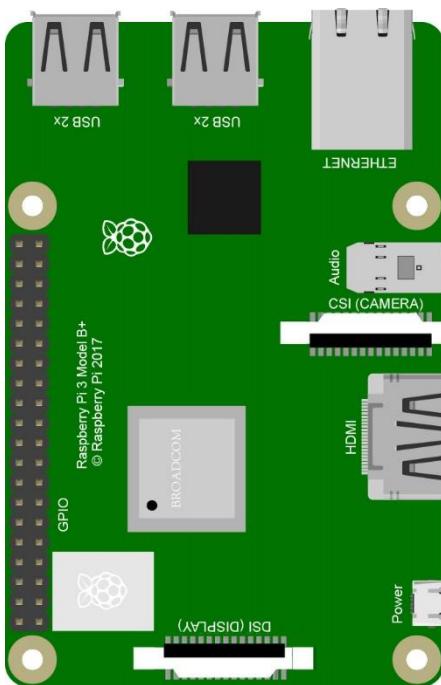

Actual image of Raspberry Pi 3 Model B:




CAD image of Raspberry Pi 3 Model B:

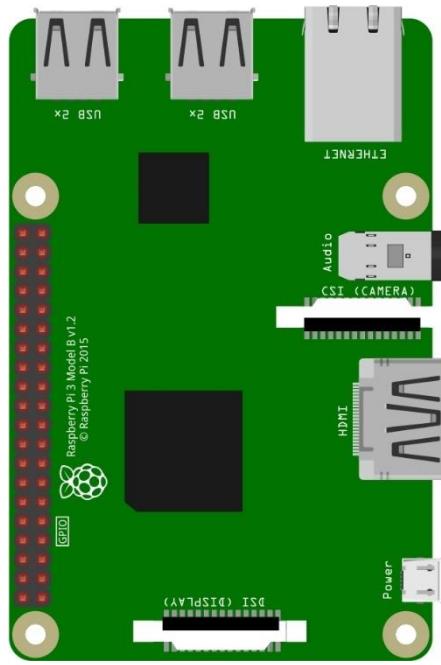

Actual image of Raspberry Pi 2 Model B:




CAD image of Raspberry Pi 2 Model B:

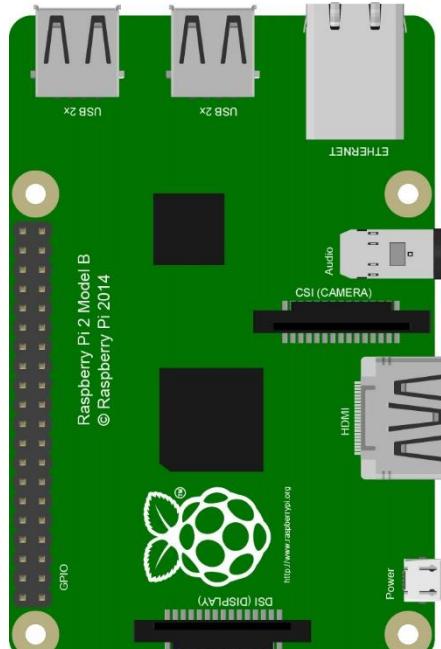

Actual image of Raspberry Pi 1 Model B+:




CAD image of Raspberry Pi 1 Model B+:

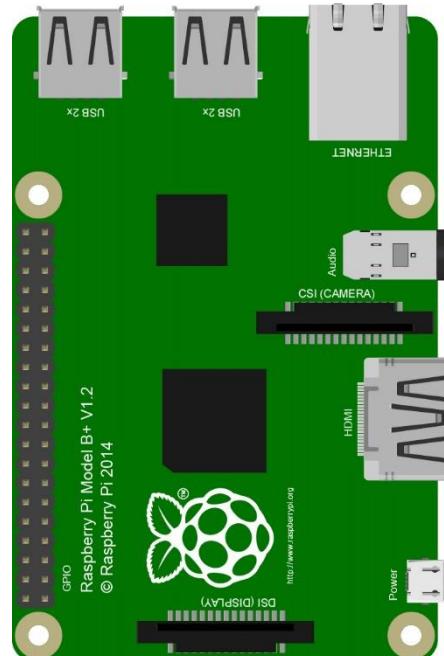

Actual image of Raspberry Pi 3 Model A+:




CAD image of Raspberry Pi 3 Model A+:

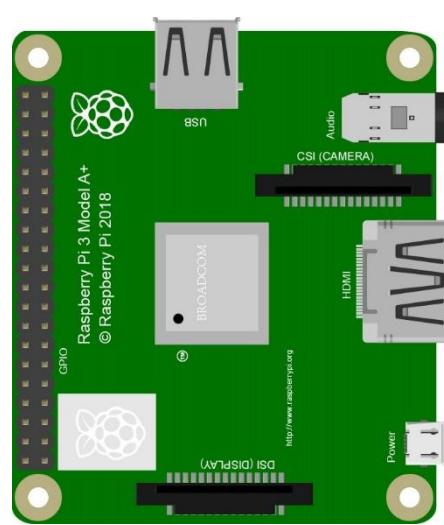

Actual image of Raspberry Pi 1 Model A+:




CAD image of Raspberry Pi 1 Model A+:

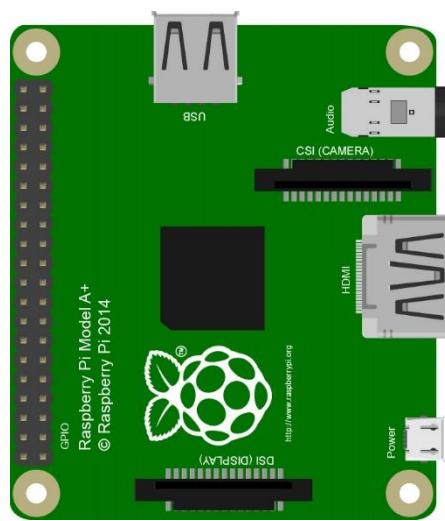


Actual image of Raspberry Pi Zero W:




CAD image of Raspberry Pi Zero W:

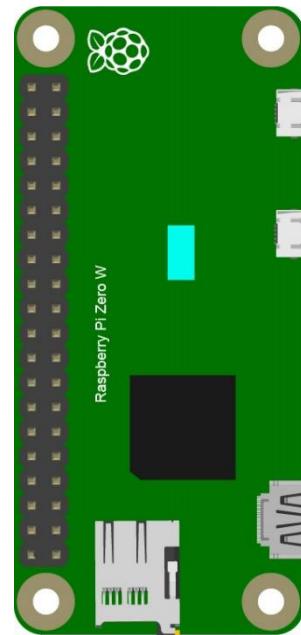


Actual image of Raspberry Pi Zero W

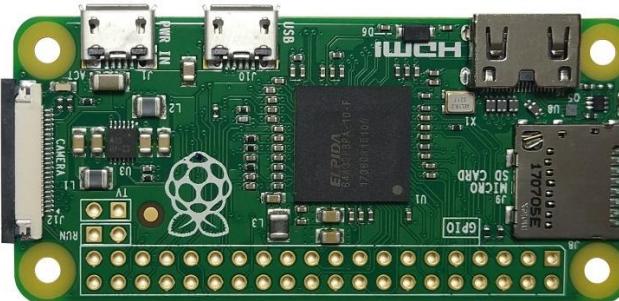


CAD image of Raspberry Pi Zero W

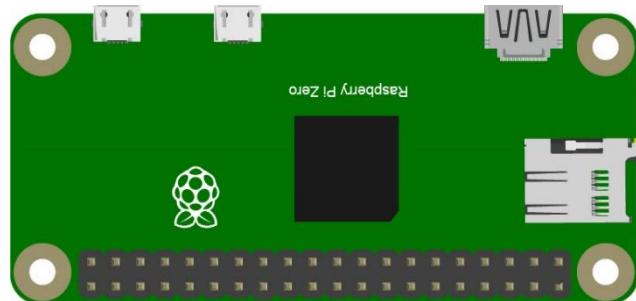


Below are the raspberry pi pictures and model pictures supported by this product. They have 40 pins. Hardware interface diagram of RPi 5 is shown below:

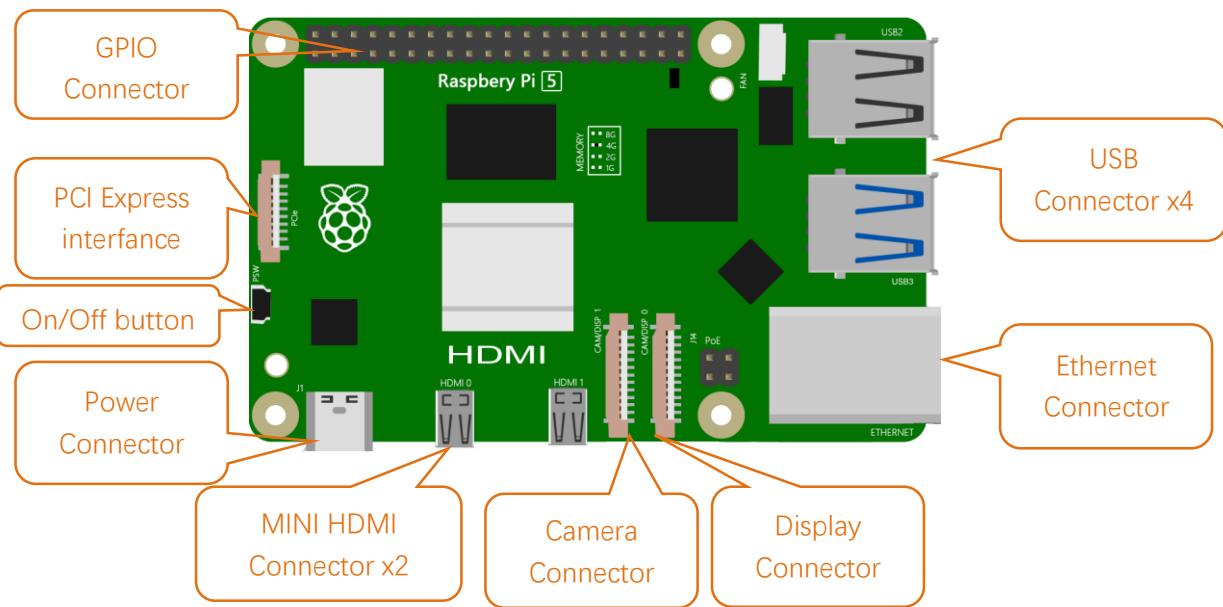


Hardware interface diagram of RPi 4B is shown below:

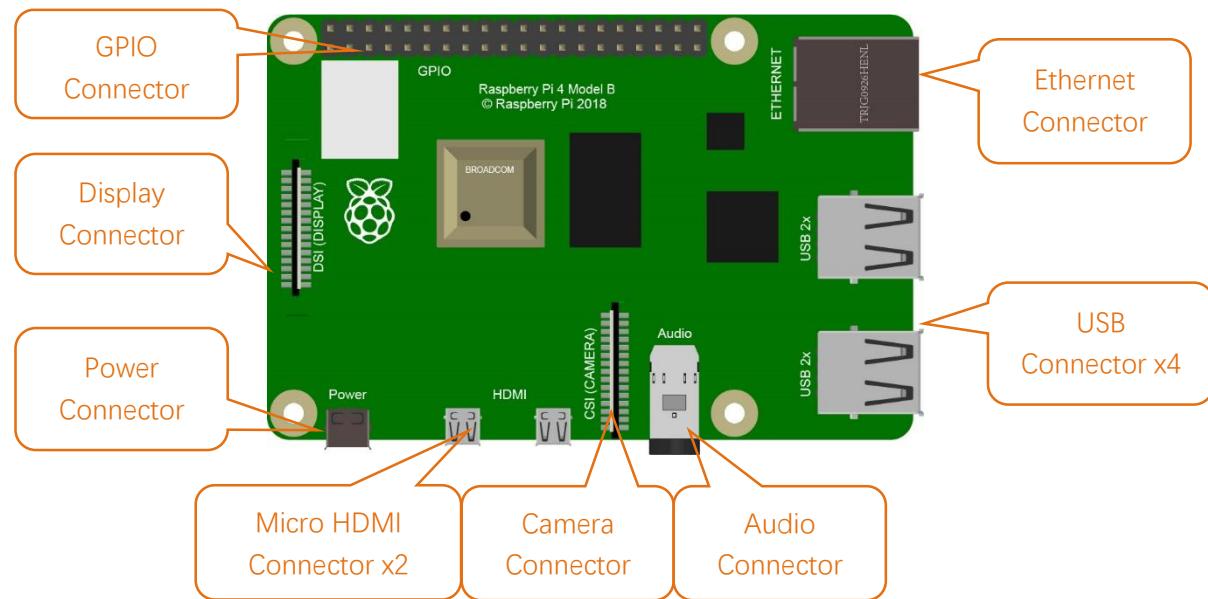


Hardware interface diagram of RPi 3B+/3B/2B/1B+:

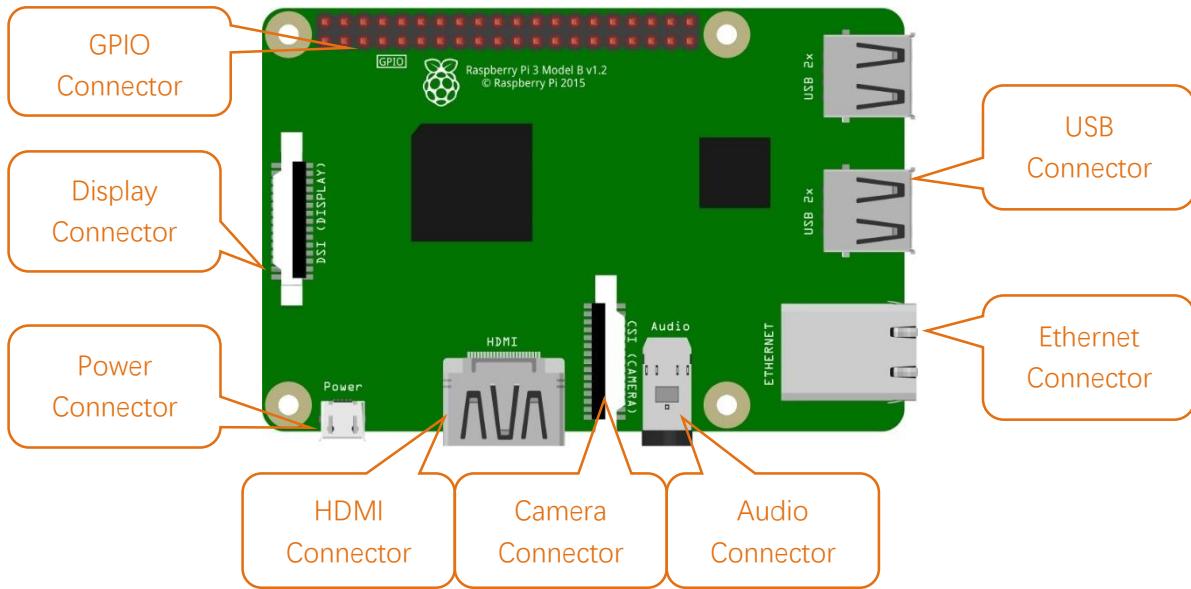

Hardware interface diagram of RPi 3A+/A+:

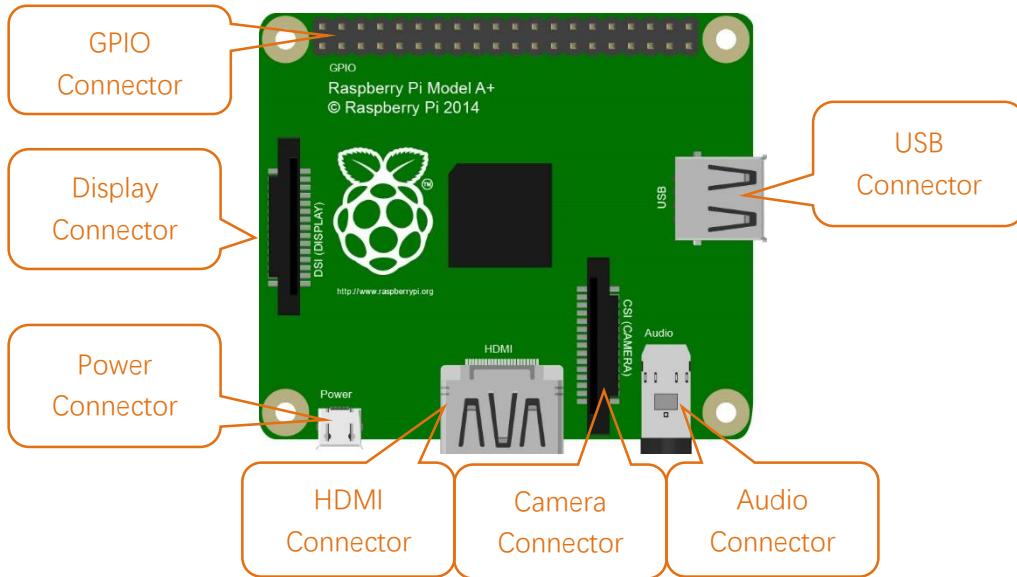

Hardware interface diagram of RPi Zero/Zero W:

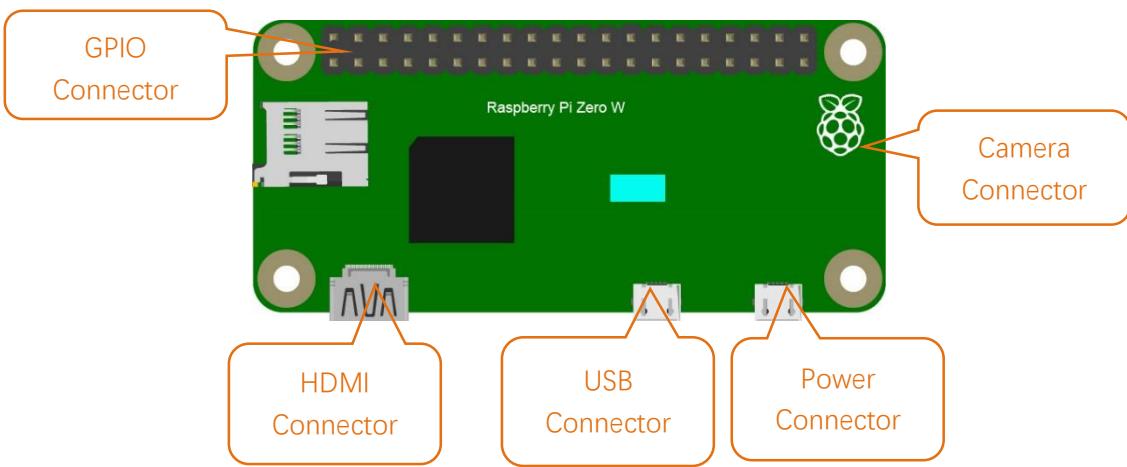

GPIO


GPIO: General purpose input/output. We will introduce the specific feature of the pins on the Raspberry Pi and what you can do with them. You can use them for all sorts of purposes. Most of them can be used as either inputs or outputs, depending on your program.

When programming the GPIO pins there are 3 different ways to refer to them: GPIO numbering, physical numbering, WiringPi GPIO Numbering.

BCM GPIO Numbering

Raspberry Pi CPU use BCM2835/BCM2836/BCM2837of Broadcom. GPIO pin number is set by chip manufacturer. These are the GPIO pins as that computer recognizes. The numbers are unordered and don't make any sense to humans. You will need a printed reference or a reference board that fits over the pins.


Each pin is defined as below:

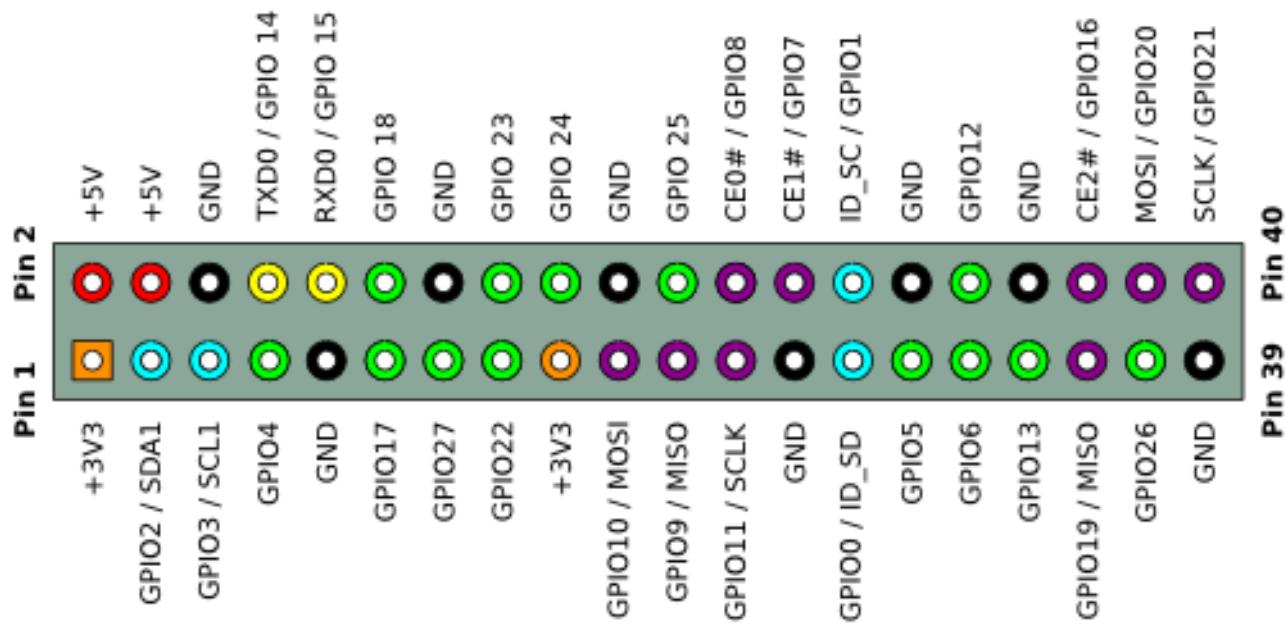

For more details about pin definition of GPIO, please refer to <http://pinout.xyz/>

PHYSICAL Numbering

Another way to refer to the pins is by simply counting across and down from pin 1 at the top left (nearest to the SD card). This is 'physical numbering', as shown below:

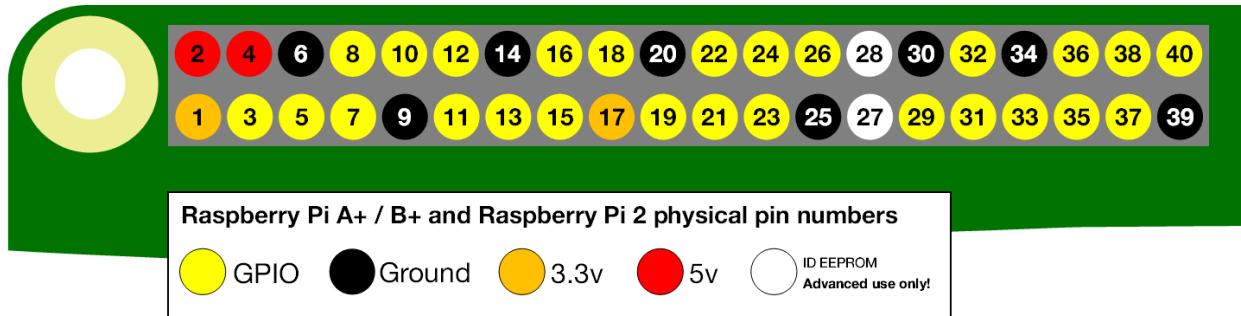

WiringPi GPIO Numbering

Different from the previous mentioned two kinds of GPIO serial numbers, RPi GPIO serial number of the WiringPi was renumbered. Here we have three kinds of GPIO number mode: based on the number of BCM chip, based on the physical sequence number and based on wiringPi. The correspondence between these three GPIO numbers is shown below:

wiringPi Pin	BCM GPIO	Name	Header	Name	BCM GPIO	wiringPi Pin	
—	—	3.3v	1 2	5v	—	—	For A+, B+, 2B, 3B, 3B+, 4B, Zero
8	R1:0/R2:2	SDA	3 4	5v	—	—	For Pi B
9	R1:1/R2:3	SCL	5 6	0v	—	—	
7	4	GPIO7	7 8	TxD	14	15	
—	—	0v	9 10	RxD	15	16	
0	17	GPIO0	11 12	GPIO1	18	1	
2	R1:21/R2:27	GPIO2	13 14	0v	—	—	
3	22	GPIO3	15 16	GPIO4	23	4	
—	—	3.3v	17 18	GPIO5	24	5	
12	10	MOSI	19 20	0v	—	—	
13	9	MISO	21 22	GPIO6	25	6	
14	11	SCLK	23 24	CE0	8	10	
—	—	0v	25 26	CE1	7	11	
30	0	SDA.0	27 28	SCL.0	1	31	
21	5	GPIO.21	29 30	0V	—	—	
22	6	GPIO.22	31 32	GPIO.26	12	26	
23	13	GPIO.23	33 34	0V	—	—	
24	19	GPIO.24	35 36	GPIO.27	16	27	
25	26	GPIO.25	37 38	GPIO.28	20	28	
		0V	39 40	GPIO.29	21	29	

(For more details, please refer to <https://projects.drogon.net/raspberry-pi/wiringpi/pins/>)

You can also use the following command to view their correspondence.

```
gpio readall
```

Pi 3 Model B GPIO Pinout												
BCM	wPi	Name	Mode	V	Physical	V	Mode	Name	wPi	BCM		
		3.3v			1	2		5v				
2	8	SDA.1	ALTO	1	3	4		5V				
3	9	SCL.1	ALTO	1	5	6		0v				
4	7	GPIO. 7	IN	1	7	8	1	ALT5	TxD	15	14	
		0v			9	10	1	ALT5	RxD	16	15	
17	0	GPIO. 0	IN	0	11	12	0	IN	GPIO. 1	1	18	
27	2	GPIO. 2	IN	0	13	14		0v				
22	3	GPIO. 3	IN	0	15	16	0	IN	GPIO. 4	4	23	
		3.3v			17	18	0	IN	GPIO. 5	5	24	
10	12	MOSI	ALTO	0	19	20		0v				
9	13	MISO	ALTO	0	21	22	0	IN	GPIO. 6	6	25	
11	14	SCLK	ALTO	0	23	24	1	OUT	CE0	10	8	
		0v			25	26	1	OUT	CE1	11	7	
0	30	SDA.0	IN	1	27	28	1	IN	SCL.0	31	1	
5	21	GPIO.21	IN	1	29	30		0v				
6	22	GPIO.22	IN	1	31	32	0	IN	GPIO.26	26	12	
13	23	GPIO.23	IN	0	33	34		0v				
19	24	GPIO.24	IN	0	35	36	0	IN	GPIO.27	27	16	
26	25	GPIO.25	IN	0	37	38	0	IN	GPIO.28	28	20	
		0v			39	40	0	IN	GPIO.29	29	21	

For more details about wiringPi, please refer to <https://github.com/WiringPi/WiringPi>.



Chapter 0 Raspberry Pi Preparation

Install a System

Firstly, install a system for your RPi.

Component List

Required Components

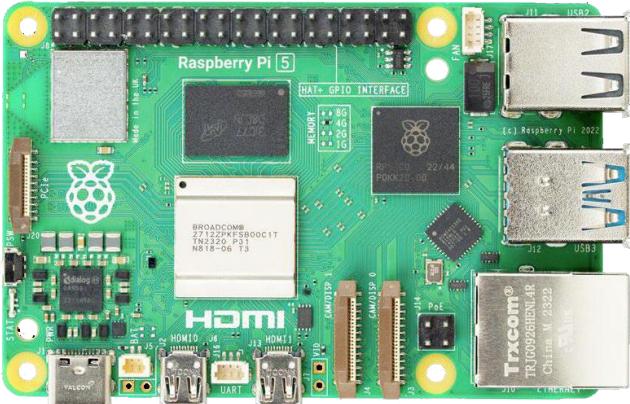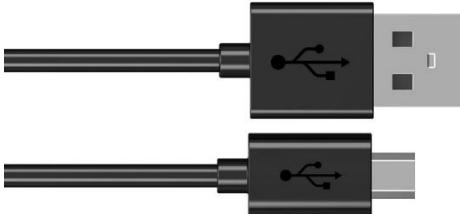Raspberry Pi 5 / 4B / 3B+ (Recommended)	 A photograph of the Raspberry Pi 5 Model B+ printed circuit board (PCB). It features a central Broadcom SoC, RAM chips, and various connectors for HDMI, USB, and Ethernet.	5V/3A Power Adapter. Different versions of Raspberry Pi have different power requirements.	 A black rectangular power adapter with '5V' and '3A' printed on it, with two black cables extending from the bottom.
Micro USB Cable x1	 Two black Micro USB cables, one with a male connector and one with a female connector, shown side-by-side.	Micro SD Card (TF Card) x1, Card Reader x1	 A black plastic USB 2.0 card reader with a red Samsung EVO Plus 32GB MicroSD card inserted into it.

This robot also supports the following versions of the Raspberry Pi, but **additional accessories** need to be prepared by yourself.

Raspberry	Additional accessories
Raspberry Pi Zero W	Camera cable(>25cm) for zero w, 15 Pin 1.0mm Pitch to 22 Pin 0.5mm https://www.amazon.com/dp/B076Q595HJ/
Raspberry Pi Zero 1.3	wireless network adapter, Camera cable(>25cm) for zero w, 15 Pin 1.0mm Pitch to 22 Pin 0.5mm, OTG cable (USB Type micro B to USB Type A)
Raspberry Pi 2 Model B	wireless network adapter
Raspberry Pi 1 Model A+	wireless network adapter
Raspberry Pi 1 Model B+	wireless network adapter

Power requirements of various versions of Raspberry Pi are shown in following table:

Product	Recommended PSU current capacity	Maximum total USB peripheral current draw	Typical bare-board active current consumption
Raspberry Pi 1 Model A	700mA	500mA	200mA
Raspberry Pi 1 Model B	1.2A	500mA	500mA
Raspberry Pi 1 Model A+	700mA	500mA	180mA
Raspberry Pi 1 Model B+	1.8A	1.2A	330mA
Raspberry Pi 2 Model B	1.8A	1.2A	350mA
Raspberry Pi 3 Model B	2.5A	1.2A	400mA
Raspberry Pi 3 Model A+	2.5A	Limited by PSU, board, and connector ratings only.	350mA
Raspberry Pi 3 Model B+	2.5A	1.2A	500mA
Raspberry Pi 4 Model B	3.0A	1.2A	600mA
Raspberry Pi 5	5.0A	1.6A (600mA if using a 3A power supply)	800mA
Raspberry Pi 400	3.0A	1.2A	800mA
Raspberry Pi Zero	1.2A	Limited by PSU, board, and connector ratings only	100mA
Raspberry Pi Zero W	1.2A	Limited by PSU, board, and connector ratings only.	150mA
Raspberry Pi Zero 2 W	2A	Limited by PSU, board, and connector ratings only.	350mA

For more details, please refer to <https://www.raspberrypi.org/help/faqs/#powerReqs>

In addition, RPi also needs an Ethernet network cable used to connect it to a WAN (Wide Area Network).

The Raspberry Pi 5 provides 1.6A of power to downstream USB peripherals when connected to a power supply capable of 5A at +5V (25W). When connected to any other compatible power supply, the Raspberry Pi 5 restricts downstream USB devices to 600mA of power.

Optional Components

Under normal circumstances, there are two ways to login to Raspberry Pi: 1) Using a stand-alone monitor. 2) Using a remote desktop or laptop computer monitor “sharing” the PC monitor with your RPi.

Required Accessories for Monitor

If you choose to use an independent monitor, mouse and keyboard, you also need the following accessories:

1. A display with a HDMI interface
2. A Mouse and a Keyboard with an USB interface

As to Pi Zero and Pi Zero W, you also need the following accessories:

1. A Mini-HDMI to HDMI Adapter and Cable.
2. A Micro-USB to USB-A Adapter and Cable (Micro USB OTG Cable).
3. A USB HUB.
4. USB to Ethernet Interface or USB Wi-Fi receiver.

For different Raspberry Pi Modules, the optional items may vary slightly but they all aim to convert the interfaces to Raspberry Pi standards.

	Pi Zero	Pi A+	Pi Zero W	Pi 3A+	Pi B+/2B	Pi 3B/3B+	Pi 4B	Pi 5
Monitor						Yes (All)		
Mouse						Yes (All)		
Keyboard						Yes (All)		
Micro-HDMI to HDMI Adapter & Cable	Yes	No	Yes	No	No	No	No	No
Micro-HDMI to HDMI Adapter & Cable				No			Yes	
Micro-USB to USB-A Adapter & Cable (Micro USB OTG Cable)	Yes	No	Yes			No		
USB HUB	Yes	Yes	Yes	Yes	No	No	No	No
USB to Ethernet Interface	select one from two or select two from two		optional		Internal Integration	Internal Integration		
USB Wi-Fi Receiver			Internal Integration		optional			

Required Accessories for Remote Desktop

If you do not have an independent monitor, or if you want to use a remote desktop, you first need to login to Raspberry Pi through SSH, and then open the VNC or RDP service. This requires the following accessories.

	Pi Zero	Pi Zero W	Pi A+	Pi 3A+	Pi B+/2B	Pi 3B/3B+/4B/5
Micro-USB to USB-A Adapter & Cable (Micro USB OTG Cable)	Yes	Yes	No			NO
USB to Ethernet interface	Yes	Yes	Yes			



Raspberry Pi OS

Without Screen - Use Raspberry Pi - under Windows PC: https://www.youtube.com/watch?v=XpiT_ezb_7c

With Screen - Use Raspberry Pi - under Windows PC: <https://youtu.be/HEywFsFrj3I>

Automatically Method

You can follow the official method to install the system for raspberry pi via visiting link below:

<https://projects.raspberrypi.org/en/projects/raspberry-pi-setting-up/2>

In this way, the system will be downloaded **automatically** via the application.

Manually Method

After installing the Imager Tool in the **link above**. You can **also** download the system **manually** first.

Visit <https://www.raspberrypi.org/downloads/>

Manually install an operating system image

Browse a range of operating systems provided by Raspberry Pi and by other organisations, and download them to install manually.

[See all download options](#)



Operating system images

Many operating systems are available for Raspberry Pi, including Raspberry Pi OS, our official supported operating system, and operating systems from other organisations.

[Raspberry Pi Imager](#) is the quick and easy way to install an operating system to a microSD card ready to use with your Raspberry Pi. Alternatively, choose from the operating systems below, available to download and install manually.

Download:

- [Raspberry Pi OS](#)
- [Raspberry Pi OS \(64-bit\)](#)
- [Raspberry Pi OS \(Legacy\)](#)
- [Raspberry Pi OS \(Legacy, 64-bit\)](#)
- [Raspberry Pi Desktop](#)

Raspberry Pi OS

Our recommended operating system for most users.

Compatible with:

[All Raspberry Pi models](#)

Raspberry Pi OS with desktop

Release date: July 4th 2024
System: 32-bit
Kernel version: 6.6
Debian version: 12 (bookworm)
Size: 1.205MB
[Show SHA256 file integrity hash](#)
[Release notes](#)

[Download](#)

[Download torrent](#)

[Archive](#)


And then the zip file is downloaded.

Write System to Micro SD Card


First, put your Micro **SD card** into card reader and connect it to USB port of PC.




Then open imager toll. Clicked Choose Device.

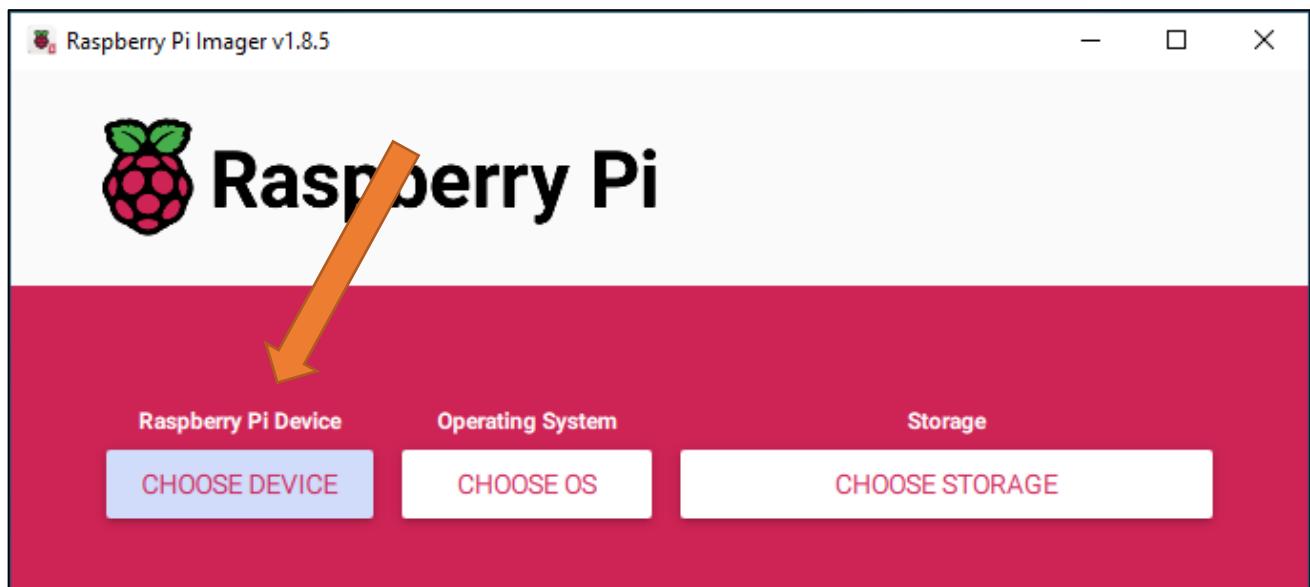


Select a Raspberry PI Device based on your Raspberry PI version. It will help us filter out the right version of the system for the Raspberry PI.

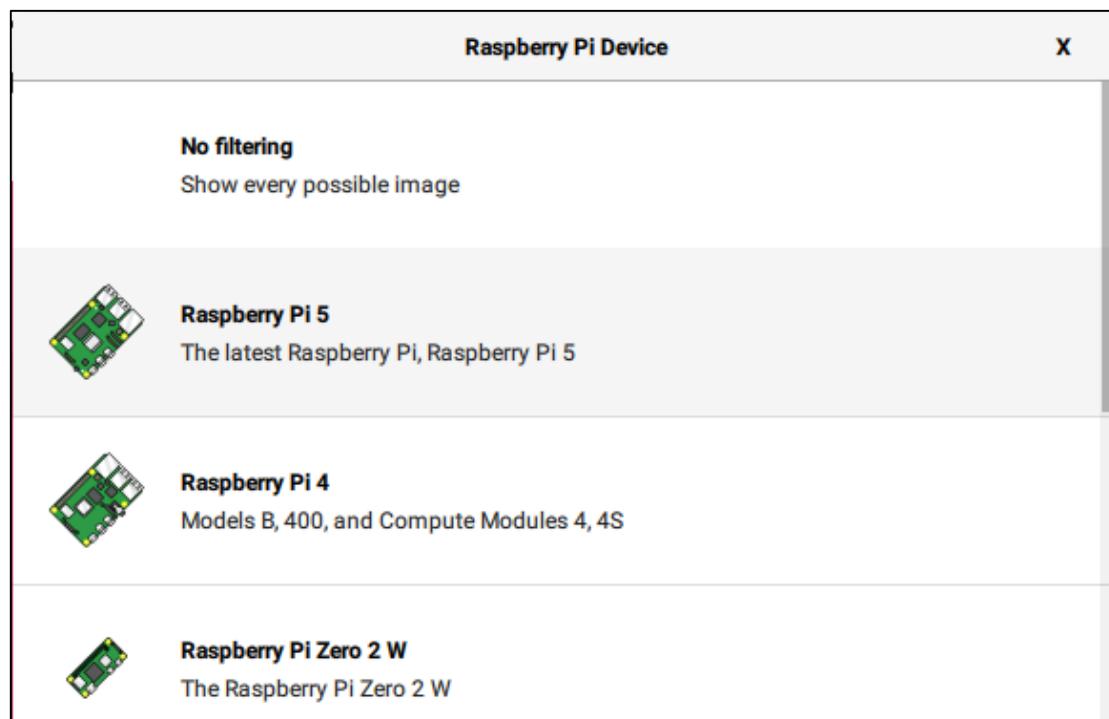


Clicked Operating System.

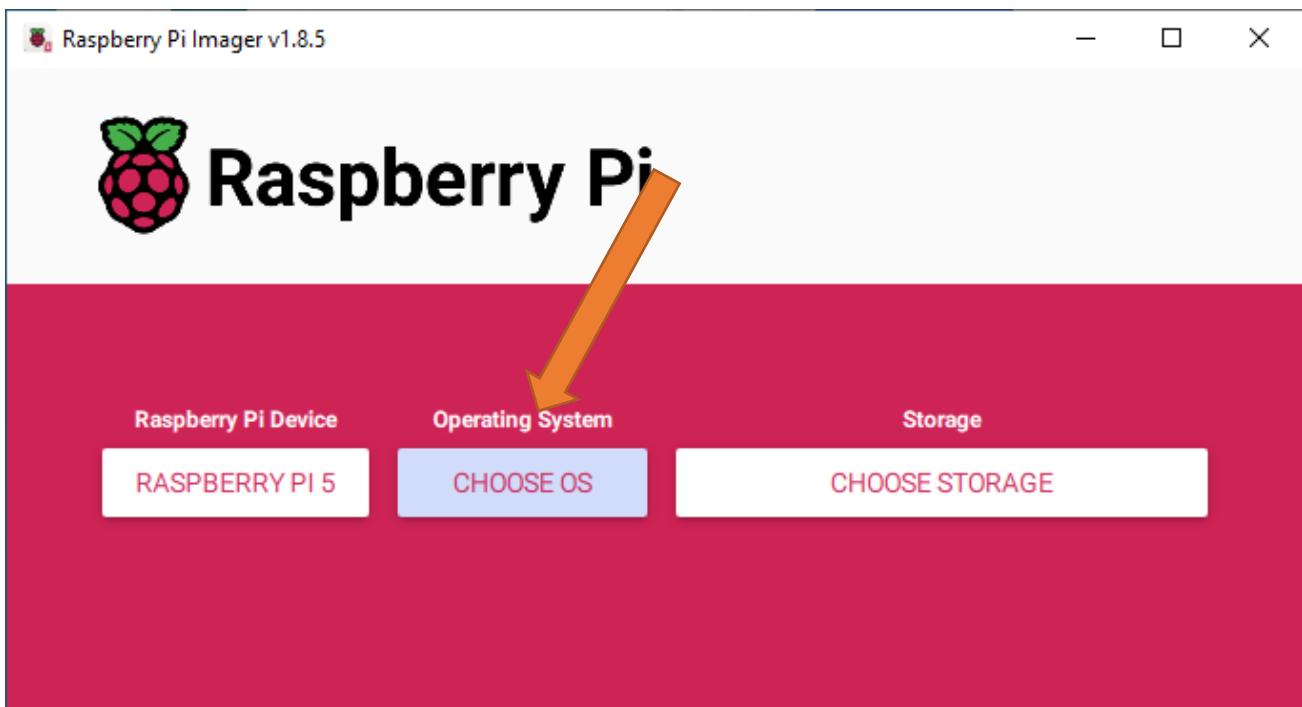


Choose system that you just downloaded in Use custom.

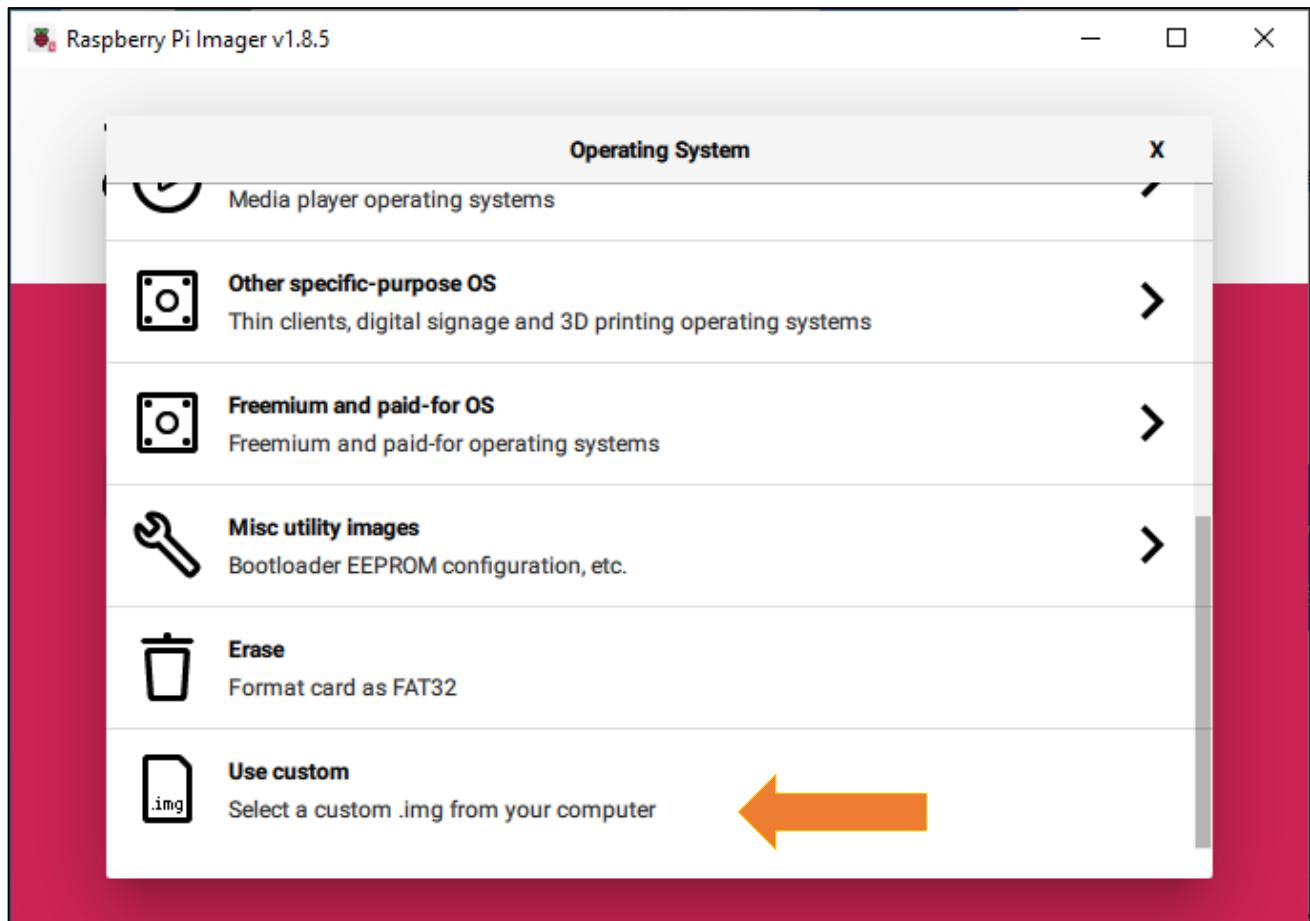

Choose the SD card. Then click "Next".

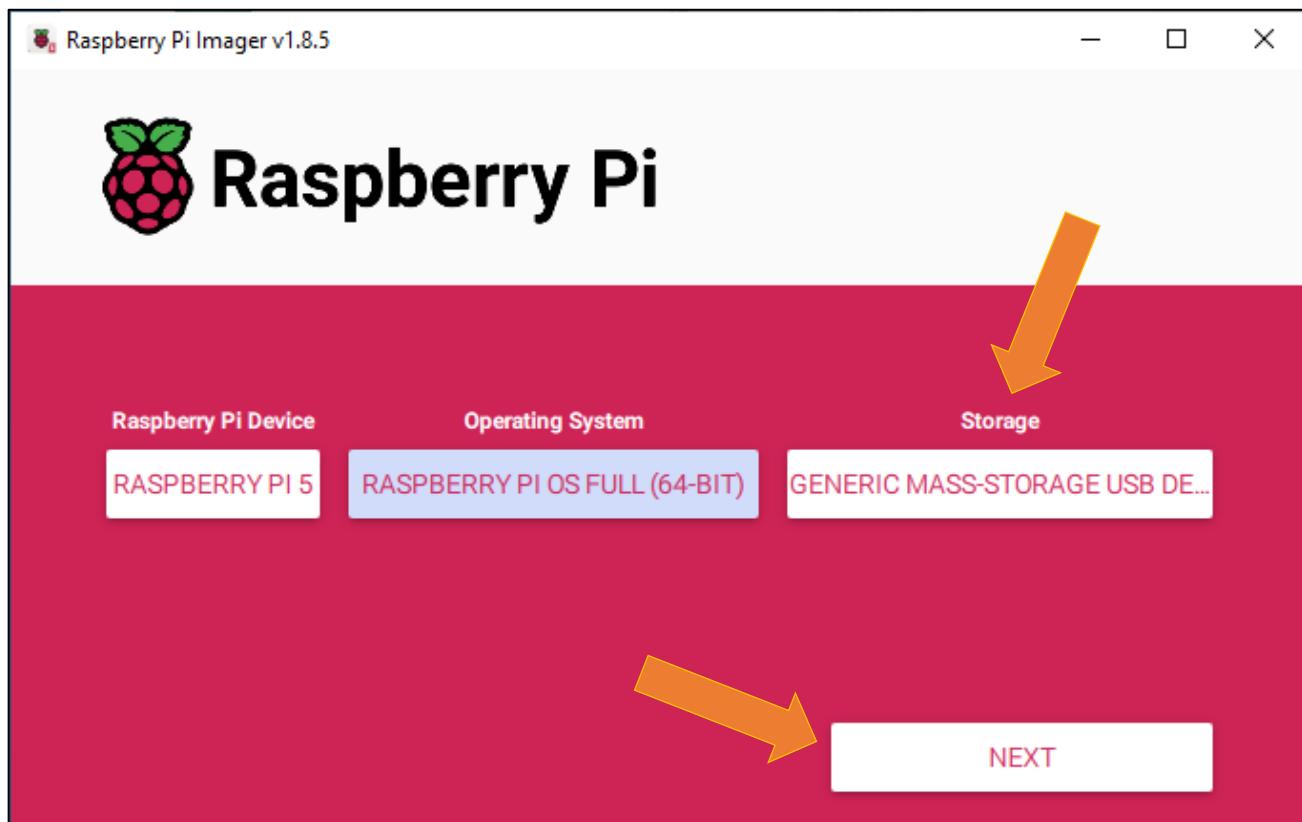


You can configure the Raspberry Pi according to your needs.

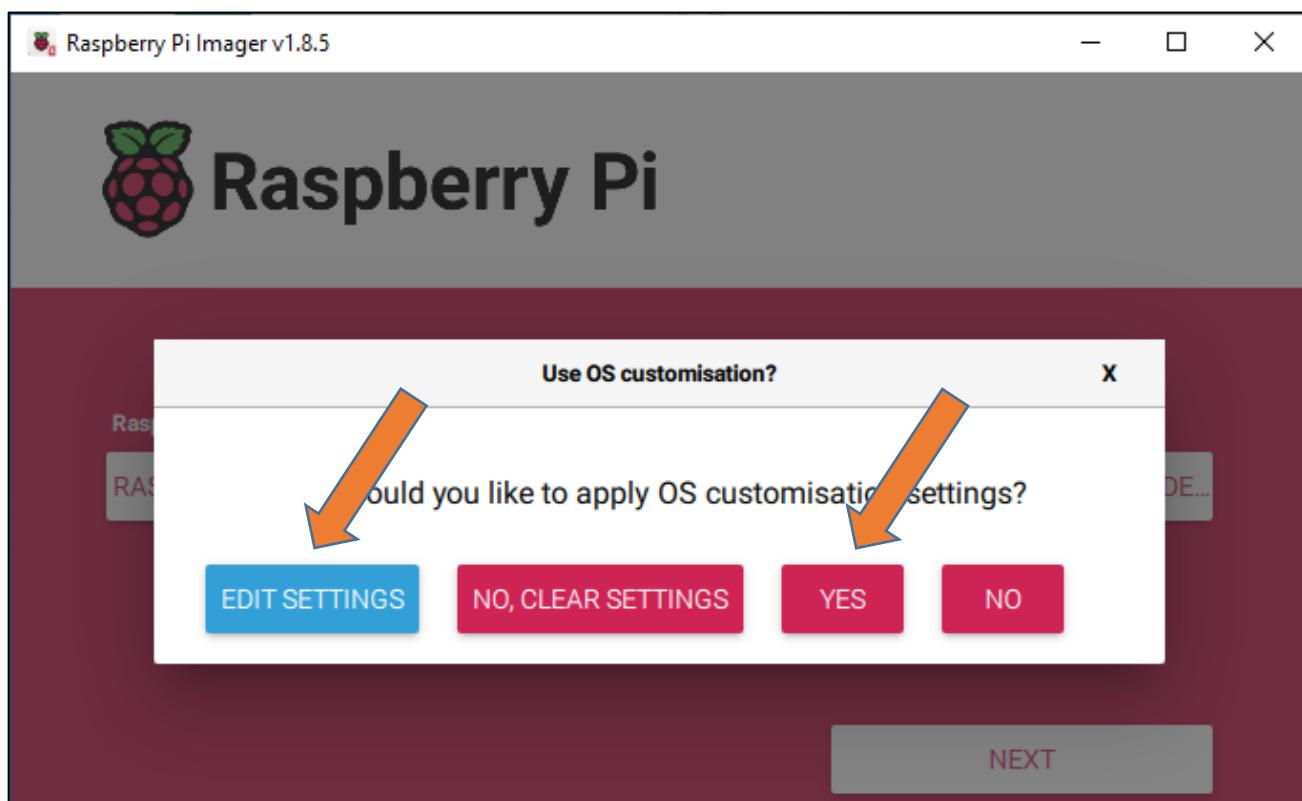


Enable ssh and configure WiFi

On the GENERAL screen, configure your information based on your actual situation.

Enable SSH on the SERVICES page.

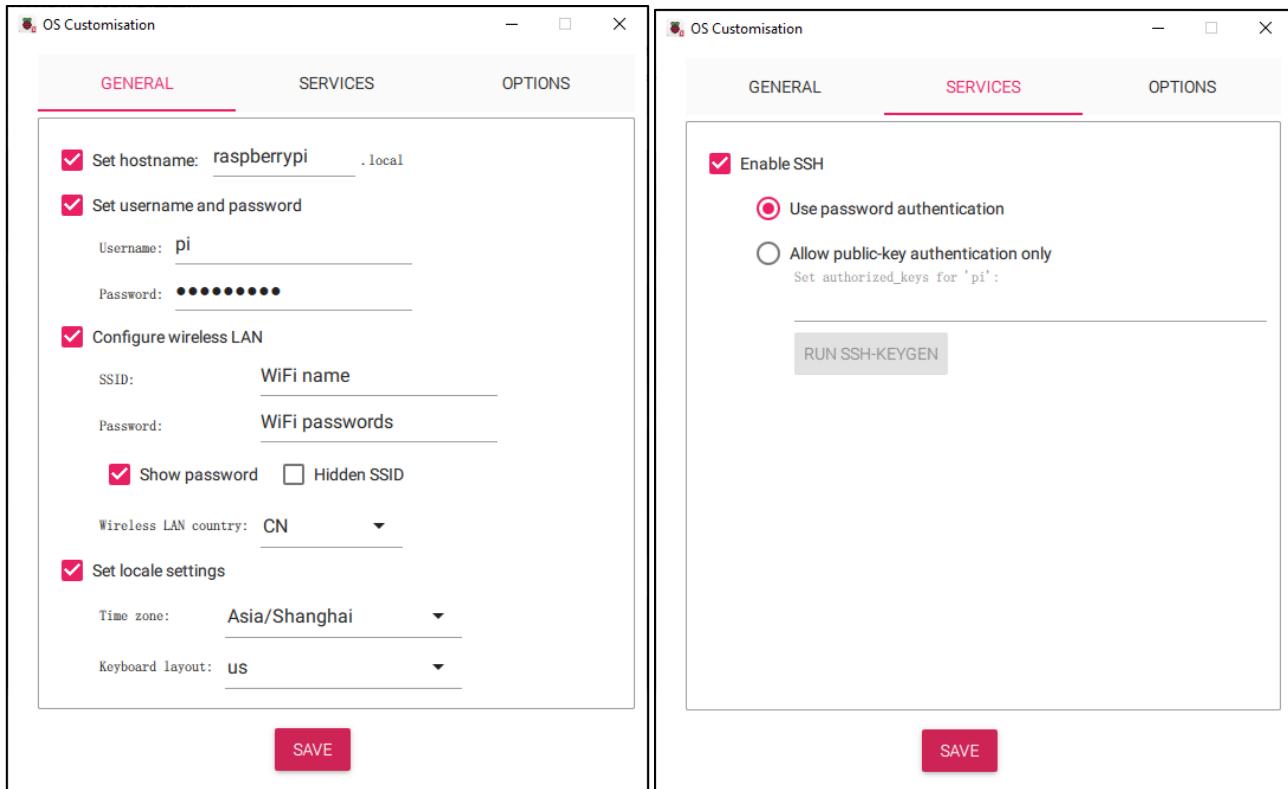


Click Save, in the new screen, click Yes, wait for SD to brush into the Raspberry system.

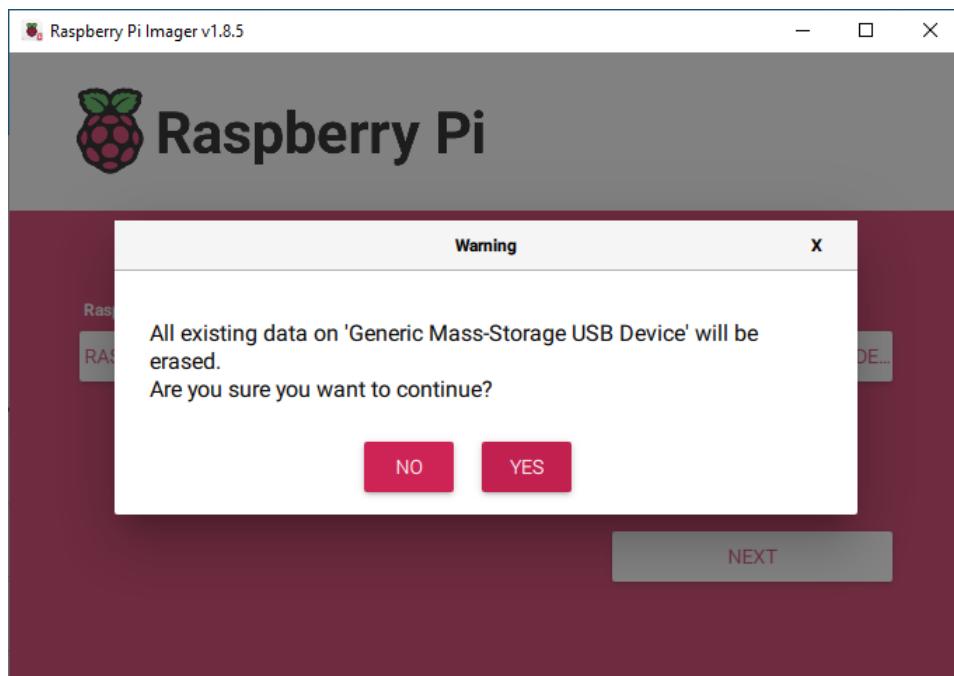

Insert SD card

Then remove SD card from card reader and insert it into Raspberry Pi.

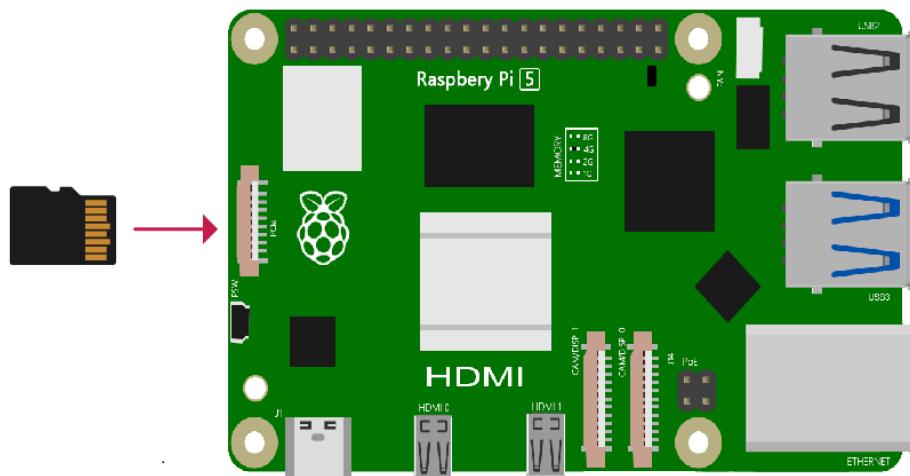


Connect to the power supply and wait for the Raspberry PI to turn on.

Getting Started with Raspberry Pi

Monitor desktop


If you do not have a spare monitor, please skip to next section [Remote desktop & VNC](#). If you have a spare monitor, please follow the steps in this section.

After the system is written successfully, take out Micro SD Card and put it into the SD card slot of RPi. Then connect your RPi to the monitor through the HDMI port, attach your mouse and keyboard through the USB ports, attach a network cable to the network port and finally, connect your power supply (making sure that it meets the specifications required by your RPi Module Version). Your RPi should start (power up). Later, after setup, you will need to enter your user name and password to login. The default user name: pi; password: raspberry. After login, you should see the following screen.

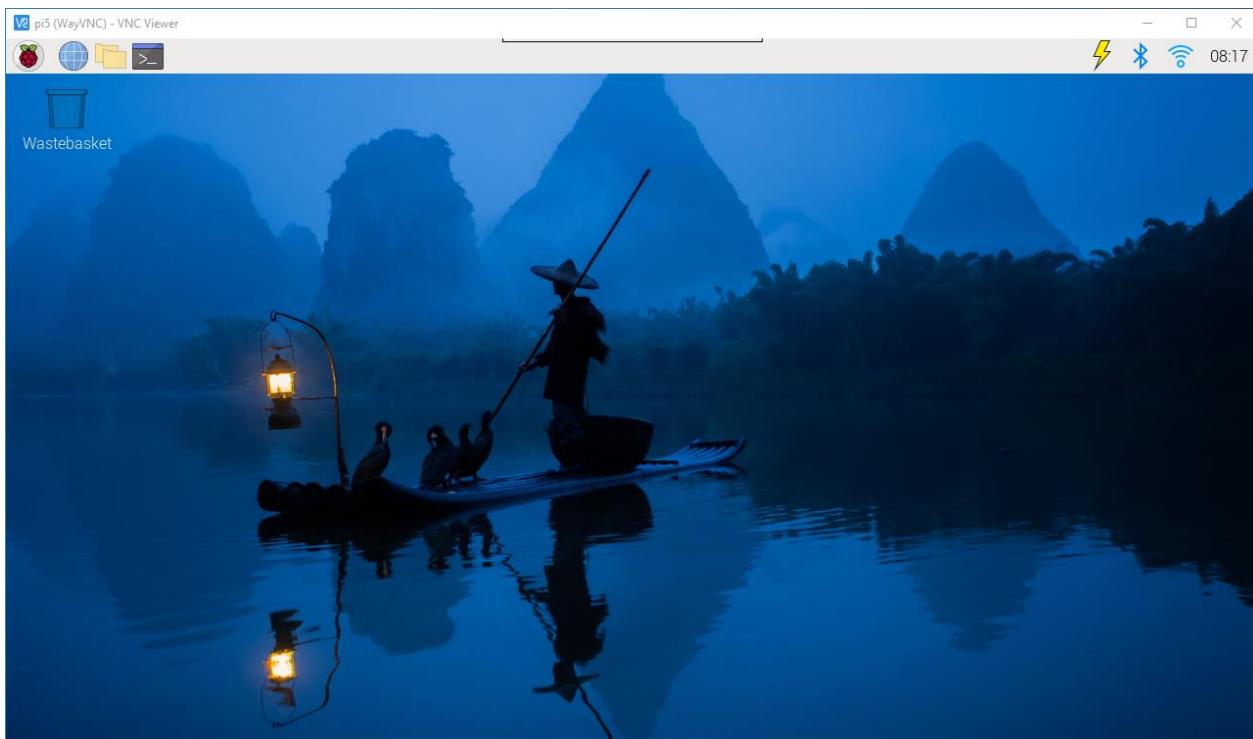


Congratulations! You have successfully installed the RASPBERRY PI OS operating system on your RPi.

Raspberry Pi 5, 4B, 3B+/3B integrates a Wi-Fi adaptor. You can use it to connect to your Wi-Fi. Then you can use the wireless remote desktop to control your RPi. This will be helpful for the following work. Raspberry Pi of other models can use wireless remote desktop through accessing an external USB wireless card.

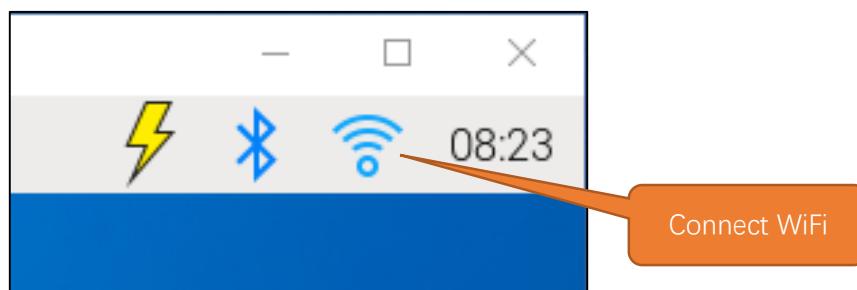


Set Resolution


You can also set other resolutions.

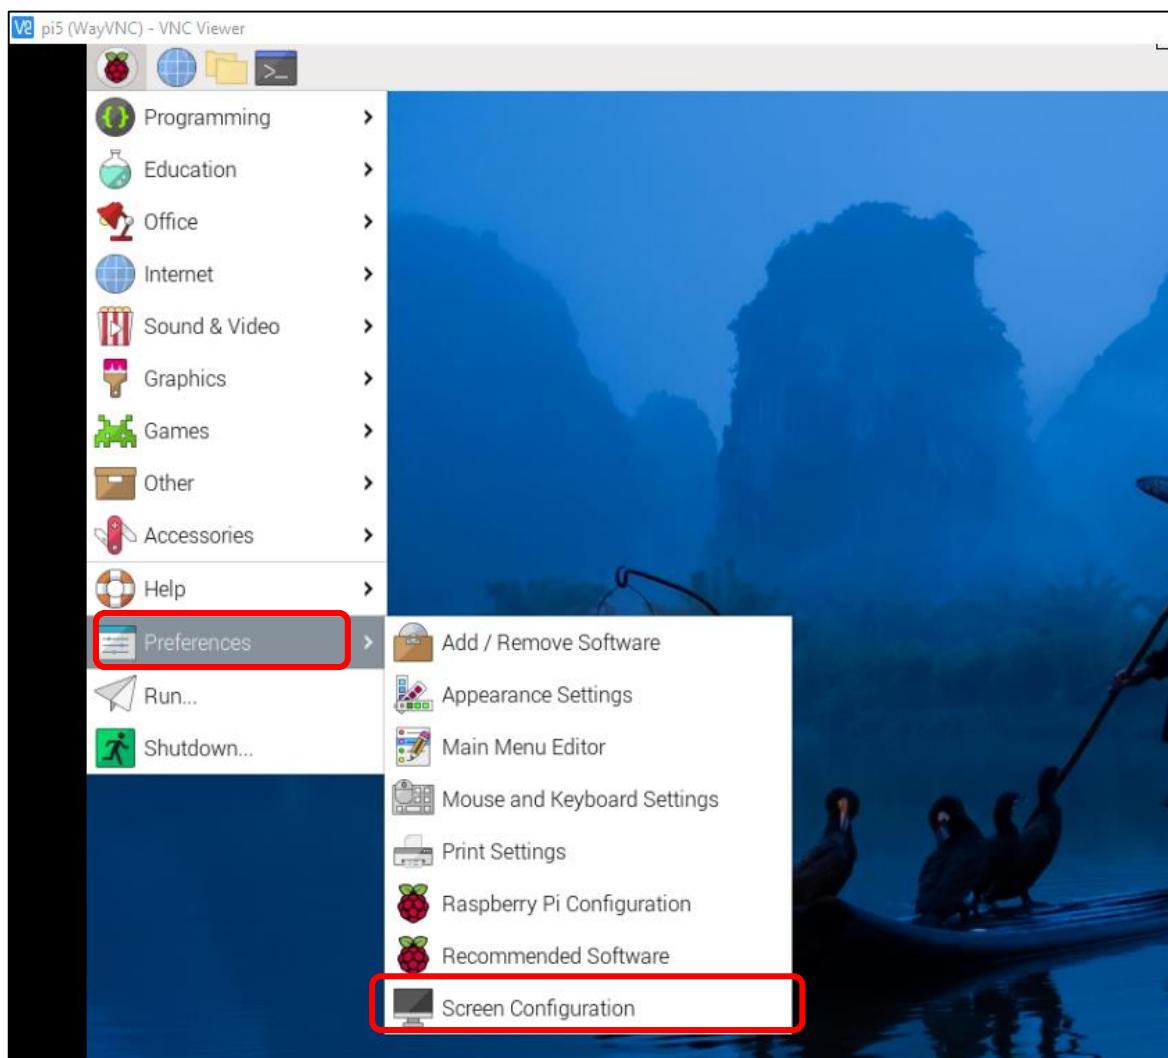

If you don't know what resolution to set properly, you can try 1920x1080.

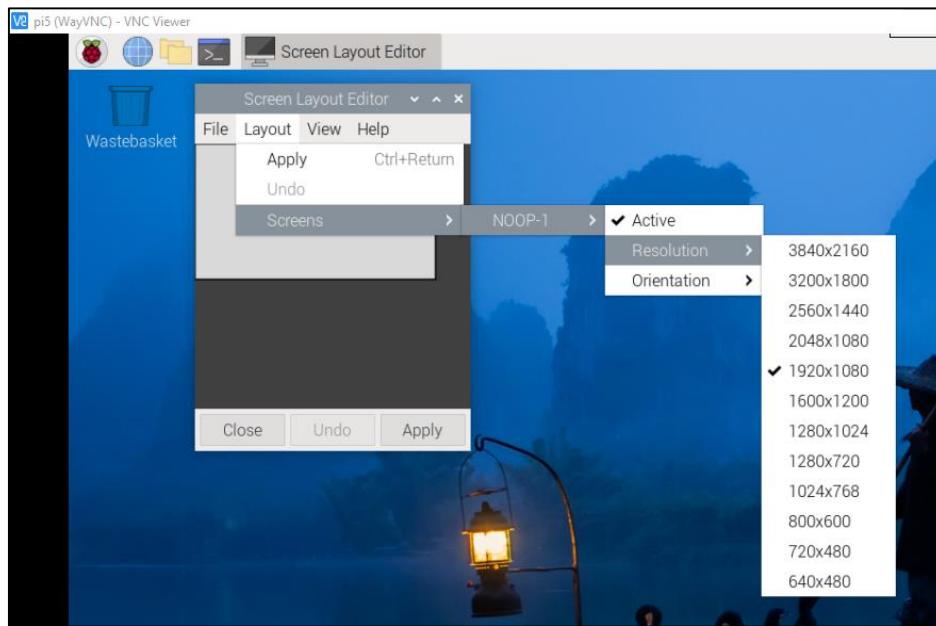


In addition, your VNC Viewer window may zoom your Raspberry Pi desktop. You can change it. On your VNC View control panel, click right key. And select Properties->Options label->Scaling. Then set proper scaling.

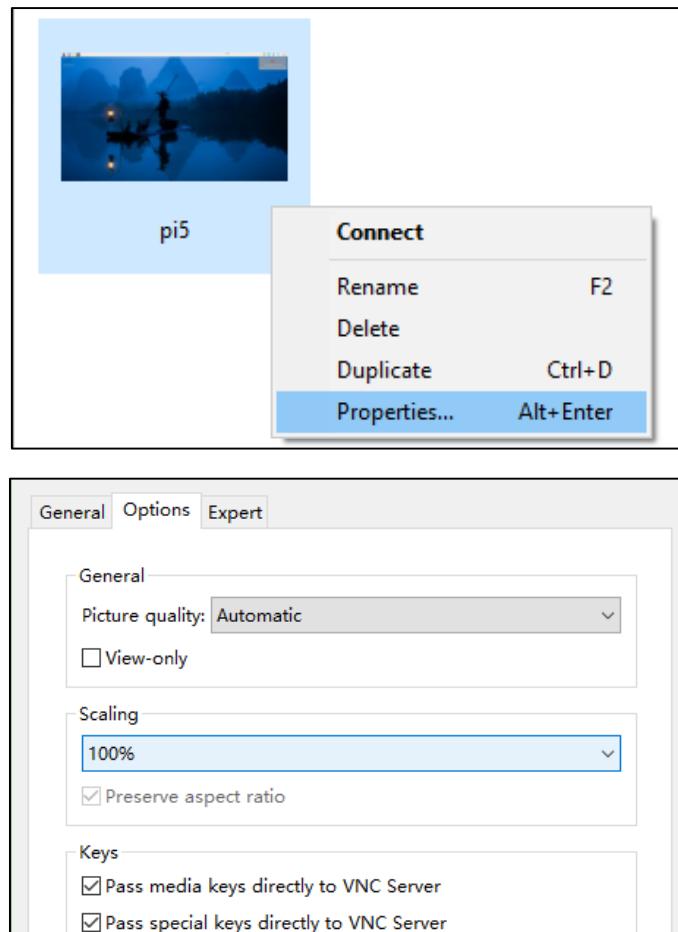

Here, you have logged in to Raspberry Pi successfully by using VNC Viewer and operated proper setting.

Raspberry Pi 5/4B/3B+/3B integrates a Wi-Fi adaptor. If you did not connect Pi to WiFi. You can connect it to wirelessly control the robot.

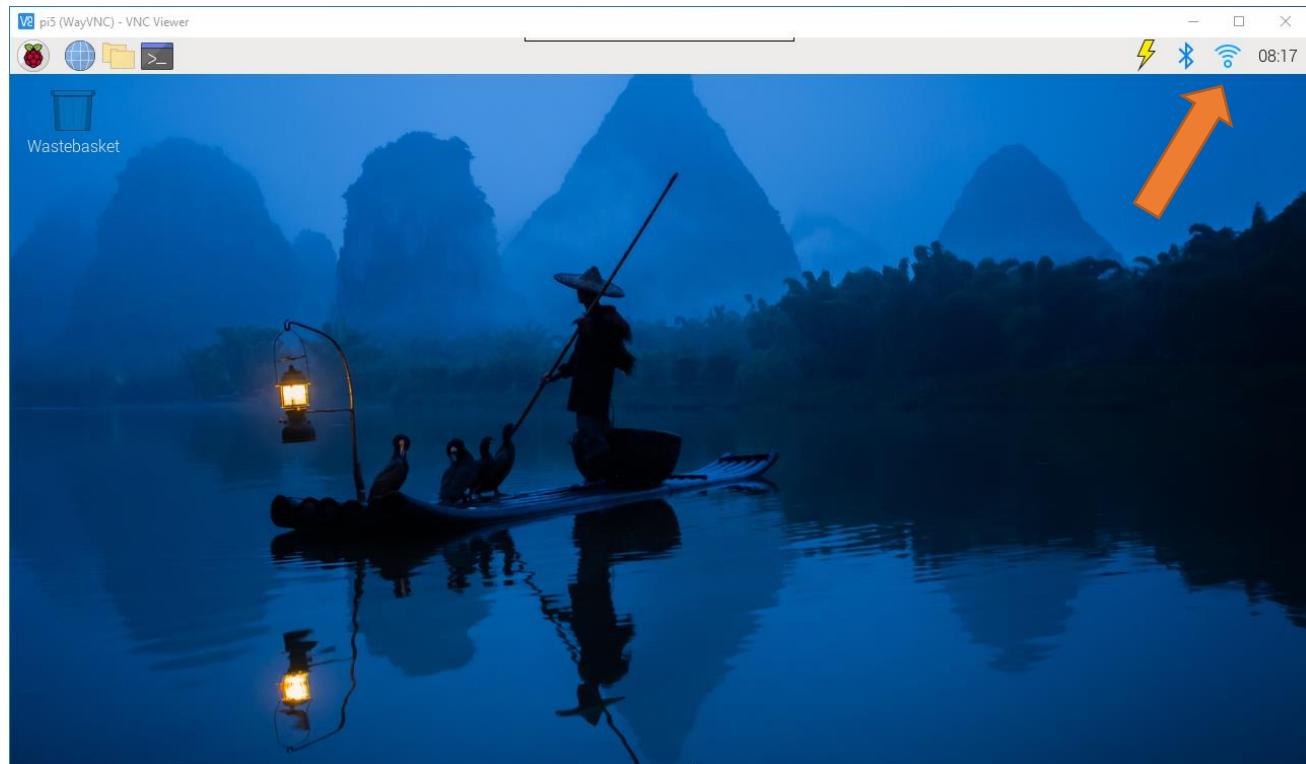

Remote desktop & VNC

If you have logged in Raspberry Pi via display, you can skip to [VNC Viewer](#).

If you don't have a spare display, mouse and keyboard for your RPi, you can use a remote desktop to share a display, keyboard, and mouse with your PC. Below is how to use:

[MAC OS remote desktop](#) and [Windows OS remote desktop](#).

MAC OS Remote Desktop

Open the terminal and type following command. **If this command doesn't work, please move to next page.**

```
ssh pi@raspberrypi.local
```

The password is **raspberry** by default, case sensitive. You may need to type **yes** during the process.

```
freenove — pi@raspberrypi: ~ — ssh pi@raspberrypi.local — 80x24
[freenove@PandeMacBook-Air ~ % ssh pi@raspberrypi.local
The authenticity of host 'raspberrypi.local (240e.3d4.3810:cc80::66)' can't be established.
ED25519 key fingerprint is SHA256:P8vv8JjHarvk83rJ9ptpJ/giR2XcW11V8Lukz0xtQ0s.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes]
```

```
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'raspberrypi.local' (ED25519) to the list of known hosts.
[pi@raspberrypi.local's password:
Permission denied, please try again.
[pi@raspberrypi.local's password:
Linux raspberrypi 6.6.20+rpi-2712 #1 SMP PREEMPT Debian 1:6.6.20-1+rpi1 (2024-03-07) aarch64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Jun  6 08:32:41 2024 from 192.168.1.85

SSH is enabled and the default password for the 'pi' user has not been changed.
This is a security risk - please login as the 'pi' user and type 'passwd' to set
a new password.

pi@raspberrypi:~ $ ]
```

You can also use the IP address to log in Pi.


Enter **router** client to **inquiry IP address** named "raspberry pi".

For example, I have inquired to **my RPi IP address, and it is "192.168.1.95"**.

Open the terminal and type following command.

```
ssh pi@192.168.1.95
```

When you see **pi@raspberrypi:~ \$**, you have logged in Pi successfully. Then you can skip to next section.

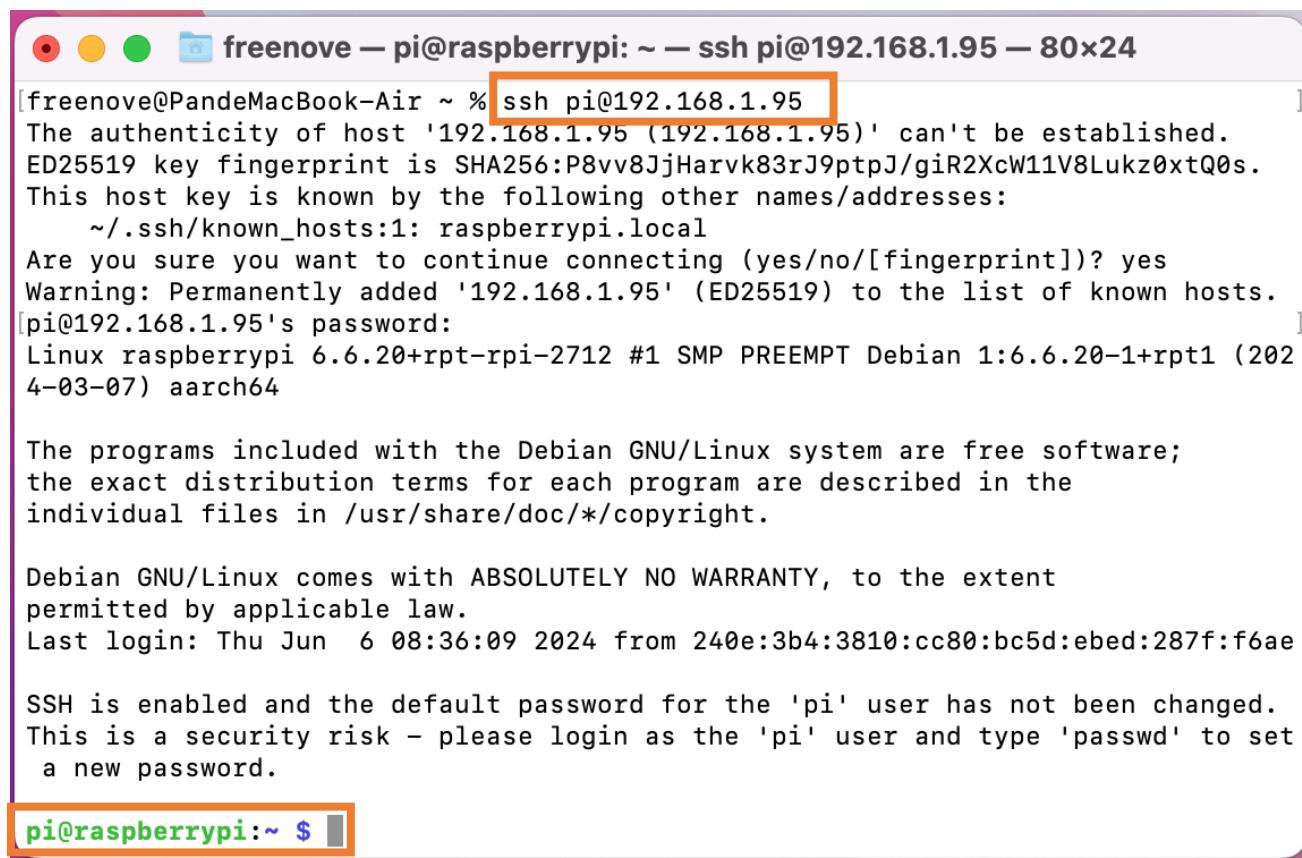

```
[freenove@PandeMacBook-Air ~ % ssh pi@192.168.1.95
The authenticity of host '192.168.1.95 (192.168.1.95)' can't be established.
ED25519 key fingerprint is SHA256:P8vv8JjHarvk83rJ9ptpJ/giR2XcW11V8Lukz0xtQ0s.
This host key is known by the following other names/addresses:
  ~/.ssh/known_hosts:1: raspberrypi.local
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.1.95' (ED25519) to the list of known hosts.
[pi@192.168.1.95's password:
Linux raspberrypi 6.6.20+rpt-rpi-2712 #1 SMP PREEMPT Debian 1:6.6.20-1+rpt1 (202
4-03-07) aarch64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/*copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Jun  6 08:36:09 2024 from 240e:3b4:3810:cc80:bc5d:ebed:287f:f6ae

SSH is enabled and the default password for the 'pi' user has not been changed.
This is a security risk - please login as the 'pi' user and type 'passwd' to set
a new password.

pi@raspberrypi:~ $
```

Then you can skip to [VNC Viewer](#).

Windows OS Remote Desktop

If you are using win10, you can use follow way to login Raspberry Pi without desktop.

Press Win+R. Enter cmd. Then use this command to check IP:

```
ping -4 raspberrypi.local
```

```
C:\Windows\system32\cmd.exe
Microsoft Windows [Version 10.0.19045.4412]
(c) Microsoft Corporation. All rights reserved.

C:\Users\DESKTOP-LIN>ping -4 raspberrypi.local

Pinging raspberrypi.local [192.168.1.95] with 32 bytes of data:
Reply from 192.168.1.95: bytes=32 time=6ms TTL=64
Reply from 192.168.1.95: bytes=32 time=8ms TTL=64
Reply from 192.168.1.95: bytes=32 time=7ms TTL=64
Reply from 192.168.1.95: bytes=32 time=5ms TTL=64

Ping statistics for 192.168.1.95:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 5ms, Maximum = 8ms, Average = 6ms

C:\Users\DESKTOP-LIN>
```

Then 192.168.1.95 is my Raspberry Pi IP.

Or enter **router** client to inquiry IP address named "raspberrypi". For example, I have inquired to **my RPi IP address, and it is "192.168.1.95"**.

```
ssh pi@xxxxxxxxxxxx(IP address)
```

Enter the following command:

```
ssh pi@192.168.1.95
```

```
pi@raspberrypi: ~
C:\Users\DESKTOP-LIN>ssh pi@192.168.1.95
The authenticity of host '192.168.1.95 (192.168.1.95)' can't be established.
ECDSA key fingerprint is SHA256:tHbTxASRQQ/zy4CT4vSJvzAYW9FdIUPVqq7/2Bf3cIM.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.1.95' (ECDSA) to the list of known hosts.
pi@192.168.1.95's password:
Linux raspberrypi 6.6.20+rpt-rpi-2712 #1 SMP PREEMPT Debian 1:6.6.20-1+rpt1 (2024-03-07) aarch64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Jun  6 08:39:59 2024 from 192.168.1.85

SSH is enabled and the default password for the 'pi' user has not been changed.
This is a security risk - please login as the 'pi' user and type 'passwd' to set a new password.

pi@raspberrypi: ~ $
```



Enable VNC Viewer


Type the following command. And select Interface Options→P5 VNC → Enter→Yes→OK. Here Raspberry Pi may need be restarted, and choose ok. Then open VNC interface.

```
sudo raspi-config
```

```
SSH is enabled and the default password for the 'pi' user has not been changed.  
This is a security risk - please login as the 'pi' user and type 'passwd' to set  
a new password.
```

```
pi@raspberrypi:~ $ sudo raspi-config
```

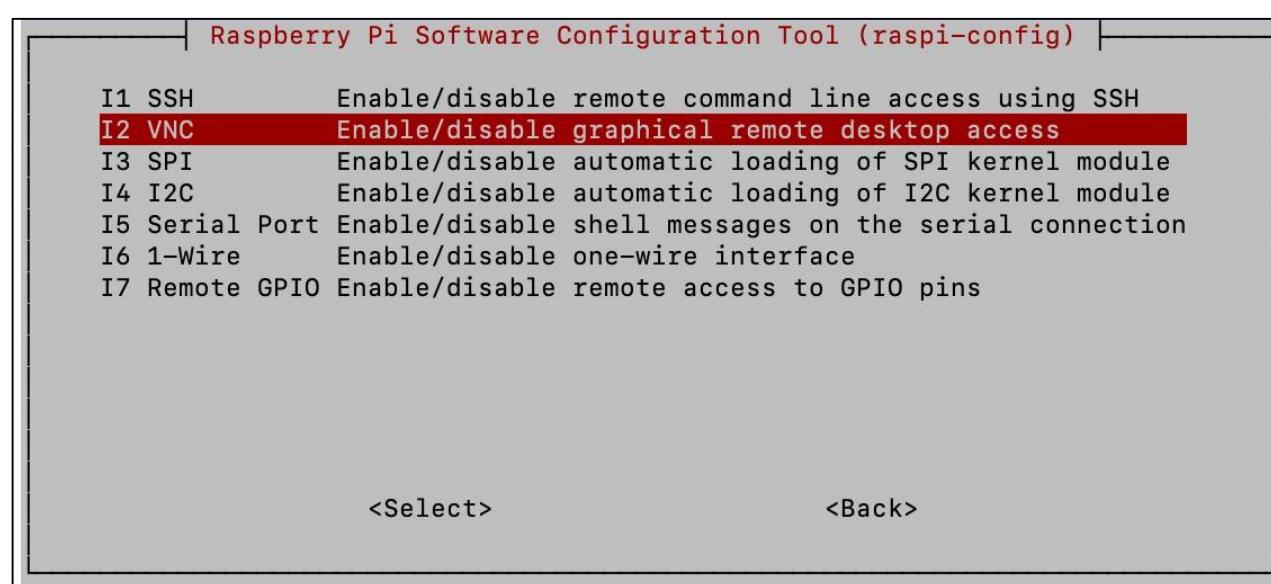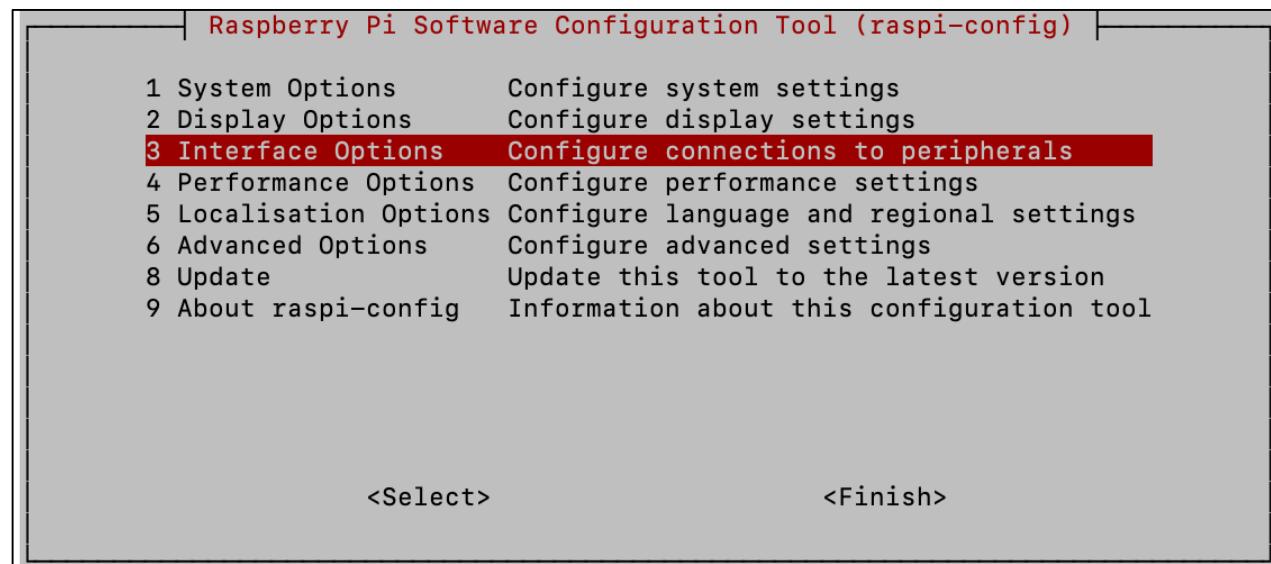


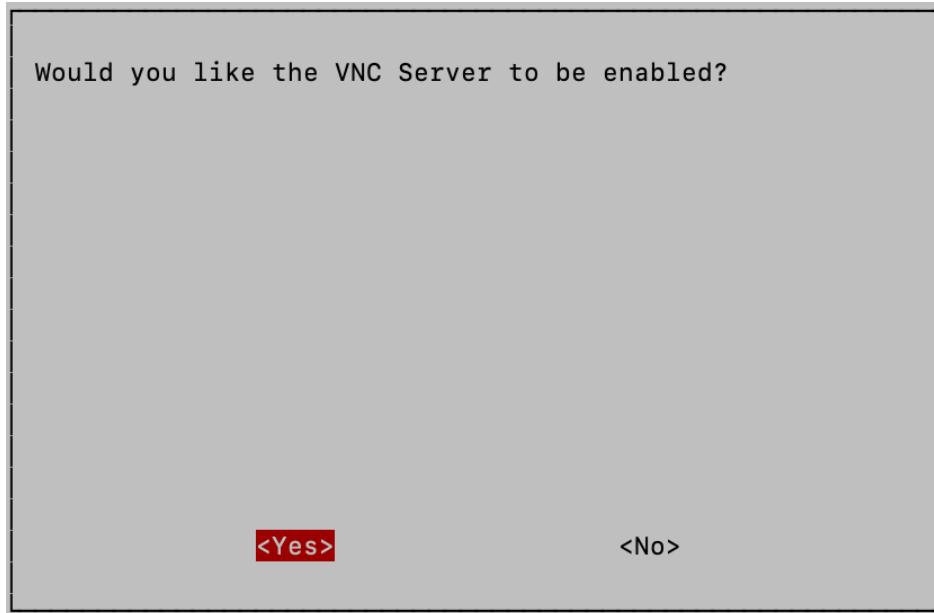

Then download and install VNC Viewer according to your computer system by click following link:


<https://www.realvnc.com/en/connect/download/viewer/>

After installation is completed, open VNC Viewer. And click File → New Connection. Then the interface is shown below.

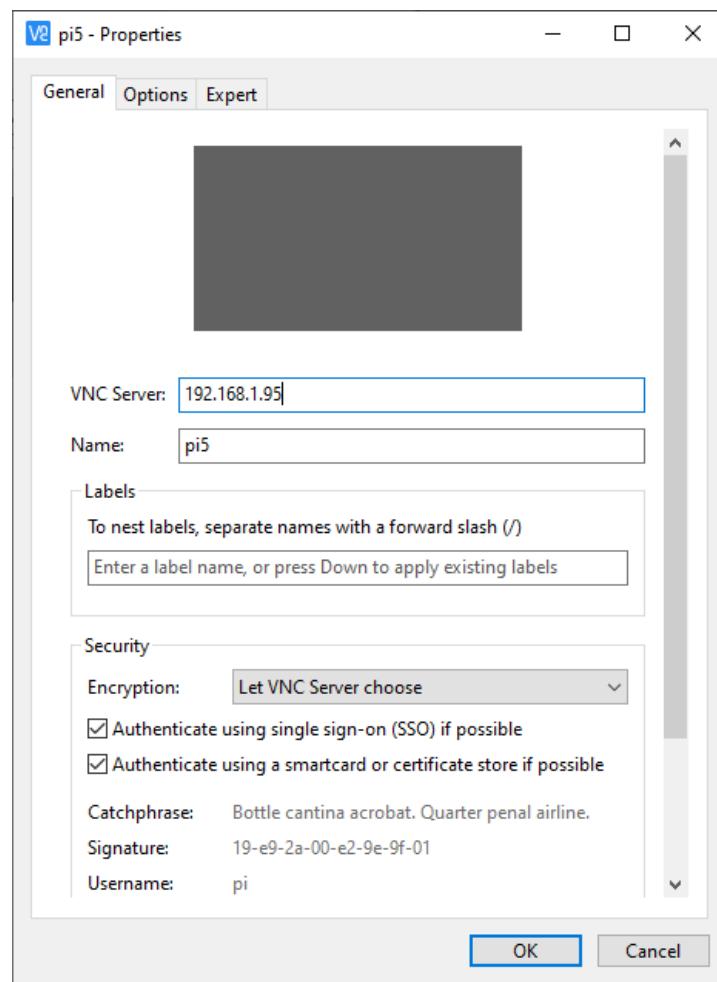


Enter ip address of your Raspberry Pi and fill in a name. Then click OK.


Then on the VNC Viewer panel, double-click new connection you just created,

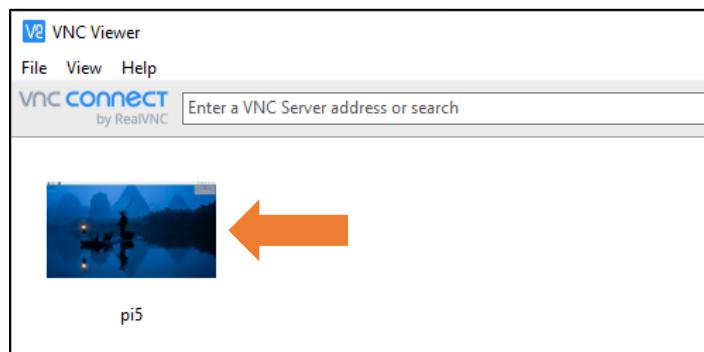

and the following dialog box pops up.

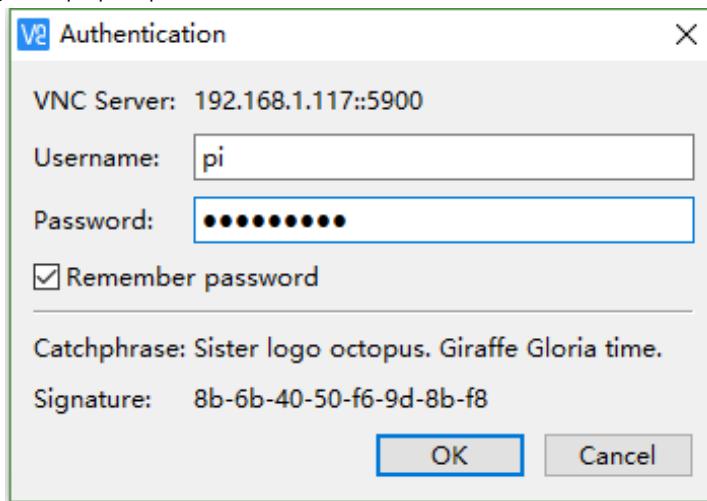

Enter username: **pi** and Password: **raspberry**. And click OK.

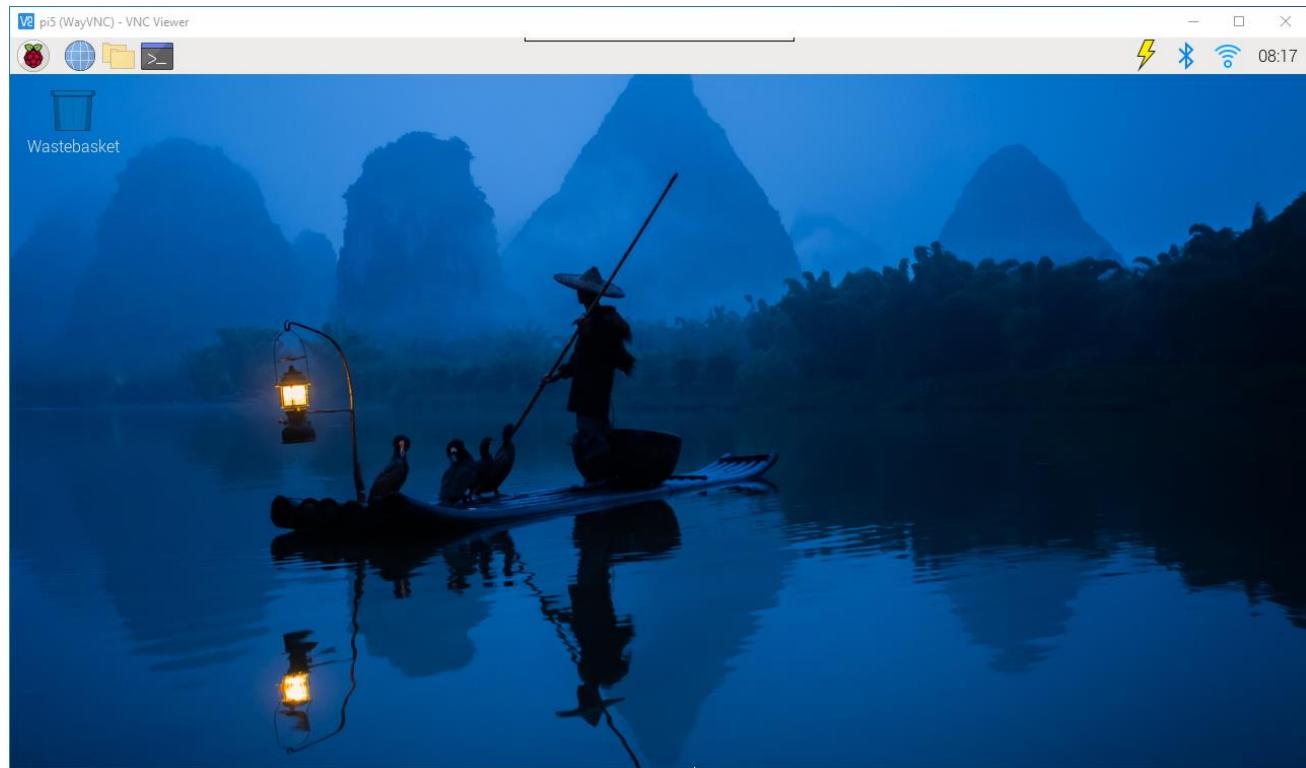


Here, you have logged in to Raspberry Pi successfully by using VNC Viewer

 support@freenove.com

Spider Shield for Raspberry Pi

Description of Robot Control Board

The control board is mainly connected the Raspberry Pi through the “PI-GPIO” port and the positioning holes on the board are suitable for the Raspberry Pi. The features and functions of the control panel are as follows.

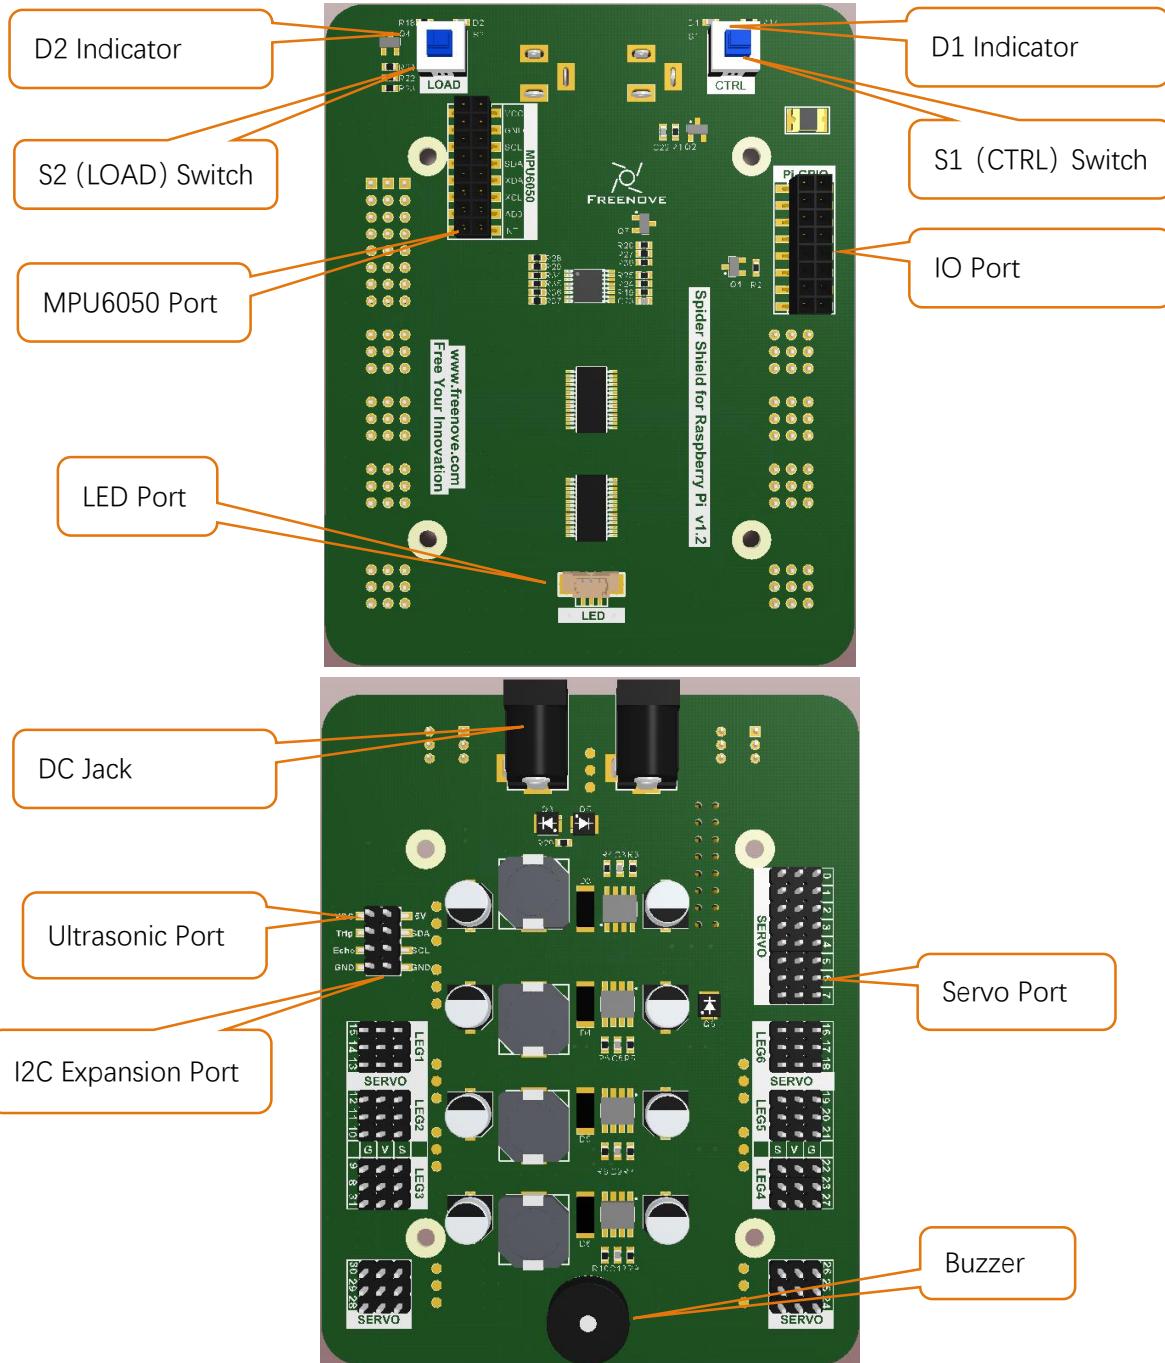

- **Spider Shield board:** powered by two sets of batteries without protection plates, with each set containing two 18650 batteries and voltage ranging from 7V-8.4V.
- **DC socket:** Two DC sockets available, each connecting to one set of batteries, each containing two 18650 batteries.
- **S1(CTRL) Switch:** It mainly controls chips like PCA9685 and ADS7830 and the power supply of the Raspberry Pi. When it is pressed, D1 indicator will turn ON.
- **S2(LOAD) Switch:** It mainly controls the power supply of servos. When it is pressed, D2 indicator will turn ON.
- **LED port:** Used to connect the LED Module, controlled directly by RPi.
- **MPU6050 Module port:** Used to connect MPU6050, controlled directly by RPi.
- **PI-GPIO port:** Used to connect control board with RPi, facilitating RPi to control the robot
- **I2CExtension Board:** Used for the extension of other I2C devices.
- **Servo port:** 32 servo ports available.
- **Sonic module port:** The interface of HC-SR04 Ultrasonic Module is provided.
- **Buzzer:** Turning ON when it is at high level and OFF at low level, directly controlled by RPi

Chapter 1 Installation of Python Libraries(Important)

In this chapter, we will do some necessary foundational preparation work: Start your Raspberry Pi and install some necessary libraries. And we will assemble the robot in the next chapter.

Caution: Do NOT install it without referring to the tutorial. Otherwise, it may cause installation errors and damage the components.

Note:


- 1, Please use Raspberry Pi OS with Desktop
- 2, The installation of libraries takes much time. You can power Raspberry Pi with a power supply Cable.
- 3, If you are using **remote desktop** to login Raspberry Pi, you need to use [VNC viewer](#).

You can watch this video while reading this chapter: <https://youtu.be/cVrwOoORItE>


We will help you with any concerns via support@freenove.com

Step 1 Obtain the Code

To download the code, you can power Raspberry Pi with a power supply cable **or** switch on S1 (Power Switch). Then open the Raspberry Pi and the terminal. You can open the terminal by clicking as shown below, or you can press “CTRL + ALT + T” on the desktop.

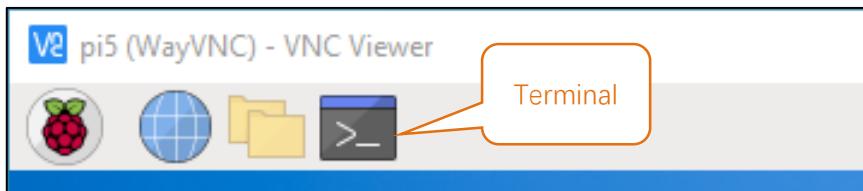

The terminal is shown below:

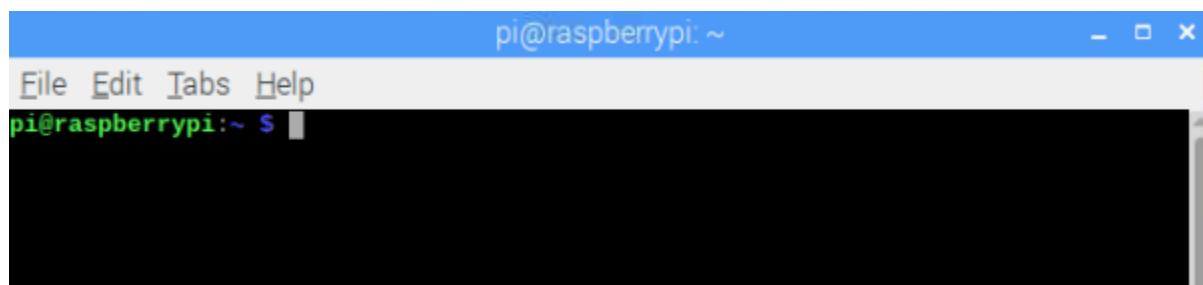

Enter the following commands in the terminal to obtain the robot's code and save it to the user's directory "Pi". (Note that here are two commands, please enter them one by one in order.)

```
cd ~
git clone --depth 1 https://github.com/Freenove/Freenove\_Big\_Hexapod\_Robot\_Kit\_for\_Raspberry\_Pi.git
```

Downloading need much time. Please wait with patience.

You can also find and download the code by visiting our official website (<http://www.freenove.com>) or our GitHub repository (<https://github.com/freenove>).

Note: all codes of the robot are written with Python3. If run with Python2, it may cause errors.

Set Python3 as default python (Necessary)

First, execute python to check the default python on your Raspberry Pi. Press Ctrl-Z to exit.

```
pi@raspberrypi:~ $ python
```

If it is python3, you can skip this section.

If it is python2, you need execute the following commands to set default python to python3.

1. Enter directory /usr/bin

```
cd /usr/bin
```

2. Delete the original python link.

```
sudo rm python
```

3. Create new python links to python.

```
sudo ln -s python3 python
```

4. Check python. Press Ctrl-Z to exit.

```
python
```

The screenshot shows a terminal window titled "pi@raspberrypi: /usr/bin". The window has a menu bar with "File", "Edit", "Tabs", and "Help". The terminal content is as follows:

```
pi@raspberrypi:~ $ cd /usr/bin/
pi@raspberrypi:/usr/bin $ sudo rm python
pi@raspberrypi:/usr/bin $ sudo ln -s python3 python
pi@raspberrypi:/usr/bin $ python
Python 3.11.2 (main, Mar 13 2023, 12:18:29) [GCC 12.2.0] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> 
```

If you want to set python2 as default python in **other projects**, just repeat the commands above and change python3 to python2.

Shortcut Key

Now, we will introduce several shortcuts that are very **useful** and **commonly used** in terminal.

1. **up and down arrow keys**. History commands can be quickly brought back by using up and down arrow keys, which are very useful when you need to reuse certain commands.

When you need to type command, pressing “**↑**” will bring back the previous command, and pressing “**↓**” will bring back the latter command.

2. **Tab key**. The Tab key can automatically complete the command/path you want to type. When there are multiple commands/paths conforming to the already typed letter, pressing Tab key once won't have any result. And pressing Tab key again will list all the eligible options. This command/path will be directly completed when there is only one eligible option.

As shown below, under the ‘~’directory, enter the Documents directory with the “cd” command. After typing “cd D”, press Tab key, then there is no response. Press Tab key again, then all the files/folders that begin with “D” is listed. Continue to type the character “oc”, then press the Tab key, and then “Documents” is completed automatically.



```
pi@raspberrypi:~ $ cd D
Desktop/  Documents/ Downloads/
pi@raspberrypi:~ $ cd Doc█
```

```
pi@raspberrypi:~ $ cd D
Desktop/  Documents/ Downloads/
pi@raspberrypi:~ $ cd Documents/
```

Step 2 Configuration

Enable I2C, SPI and VNC

The I2C interface Raspberry Pi is disabled by default. You need to open it manually.

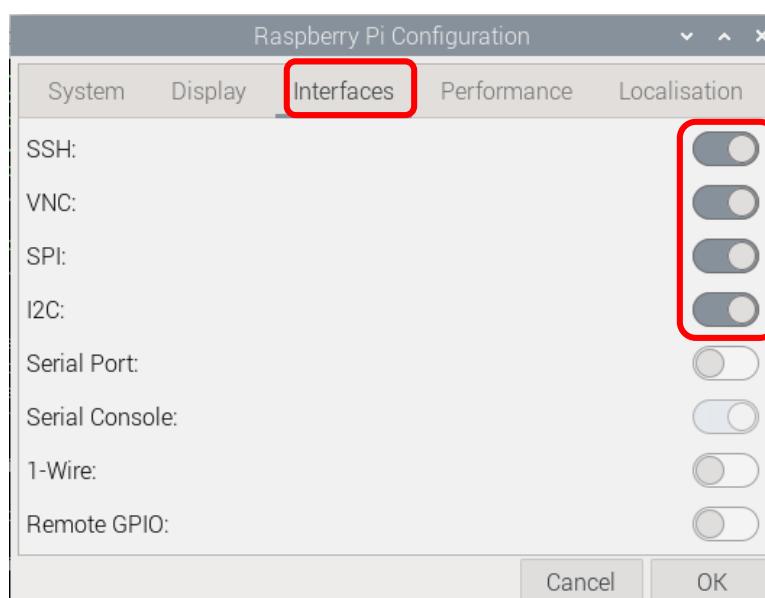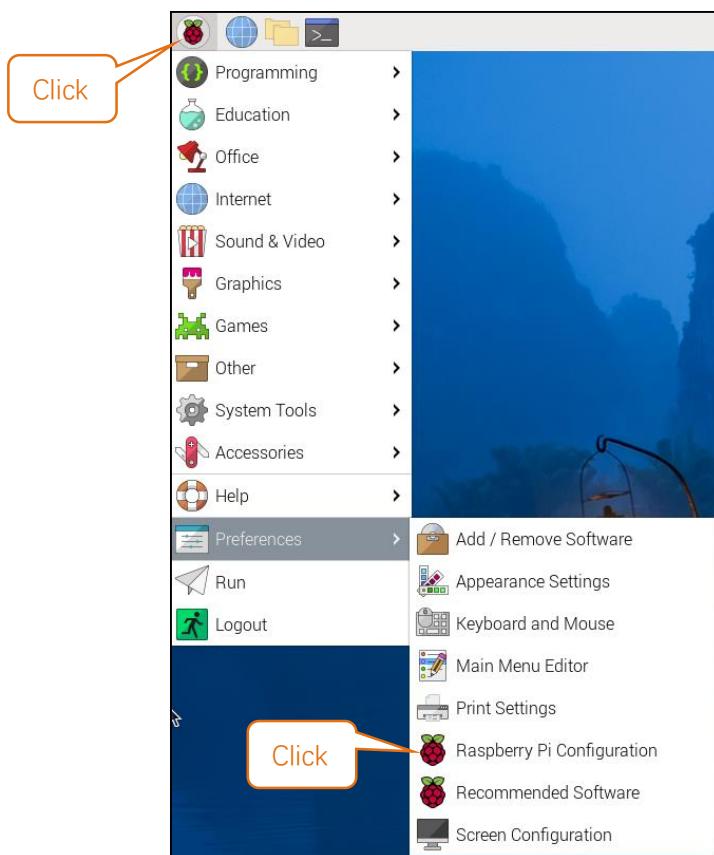

Note that if your connector version is V2.0, remember to turn on the SPI feature. If your connector version is V1.0, turn off the SPI feature.


Set I2C Baud Rate

Open the terminal and enter the following command.

```
sudo nano /boot/firmware/config.txt
```

The default I2C Baud Rate is 100000. Now we change it to 400000, because this can speed up the response speed of the servos to make robot dog walk faster. If the baud rate is 100,000, the robot walks slowly.

Scrolling the middle of the mouse to find **dtparam=i2c_arm=on**, and add “**i2c_arm_baudrate=400000**”.

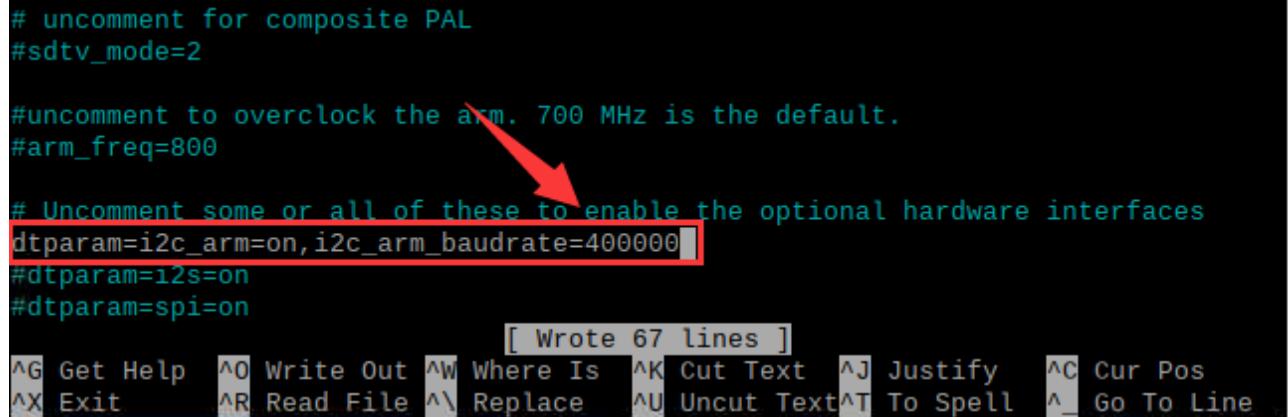

```
# uncomment for composite PAL
#sdtv_mode=2

#uncomment to overclock the arm. 700 MHz is the default.
#arm_freq=800

# Uncomment some or all of these to enable the optional hardware interfaces
dtparam=i2c_arm=on, i2c_arm_baudrate=400000
#dtparam=i2s=on
#dtparam=spi=on
[ Wrote 67 lines ]
^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos
^X Exit ^R Read File ^V Replace ^U Uncut Text ^T To Spell ^_ Go To Line
```


Press "CTRL"+"O" and then "Enter" to save the modified content. Then press "CTRL"+"X" to exit editing.

After the modification is completed, reboot Raspberry Pi to make the change work. You can also reboot the Raspberry Pi after completing the step 3 below.

Type a command to check whether the I2C module is enabled:

```
lsmod | grep i2c
```

If I2C module has been enabled, the following content will show up (the numbers showing in your device may be different):

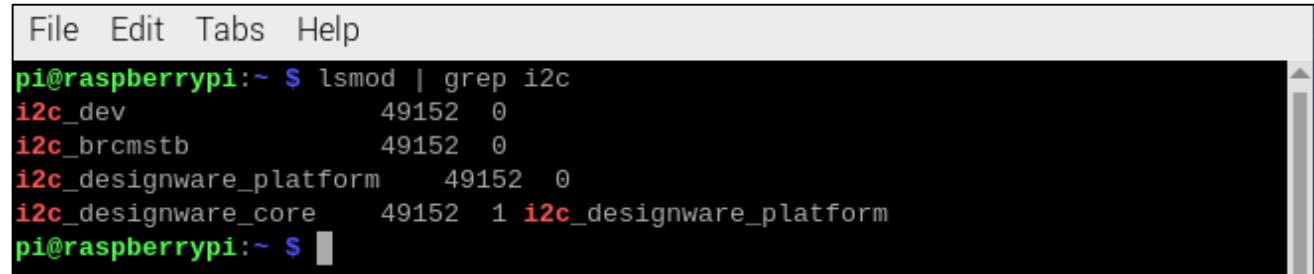

```
File Edit Tabs Help
pi@raspberrypi:~ $ lsmod | grep i2c
i2c_dev                  49152  0
i2c_brcmstb              49152  0
i2c_designware_platform   49152  0
i2c_designware_core       49152  1 i2c_designware_platform
pi@raspberrypi:~ $
```

Install I2C-Tools

Type the command to install I2C-Tools.

```
sudo apt-get install i2c-tools
```

Install python-smbus

Python-smbus is a module of the program Python, which contains some classes and methods to operate I2C.

Type the following command to install python-smbus:

```
sudo apt-get install python3-smbus
```

Additional supplement


Raspberry Pi, other than 5, 4B and 400, needs to disable the audio module, otherwise the LED will not work properly.

1. Create a new snd-blacklist.conf and open it for editing

```
sudo nano /etc/modprobe.d/snd-blacklist.conf
```

Add following content: After adding the contents, you need to press Ctrl+O, Enter, Ctrl+Z.

```
blacklist snd_bcm2835
```

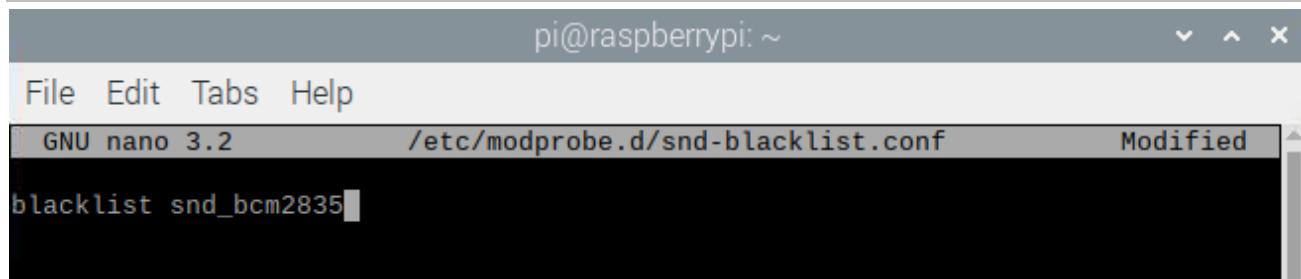

```
pi@raspberrypi: ~
File Edit Tabs Help
GNU nano 3.2          /etc/modprobe.d/snd-blacklist.conf      Modified
blacklist snd_bcm2835
```

2. We also need to edit config file.


```
sudo nano /boot/firmware/config.txt
```

Find the contents of the following two lines (with Ctrl + W you can search):

```
# Enable audio (loads snd_bcm2835)
dtparam=audio=on
```

Add # to comment out the second line. Press Ctrl+O, Enter, Ctrl+X.

```
# Enable audio (loads snd_bcm2835)
# dtparam=audio=on
```

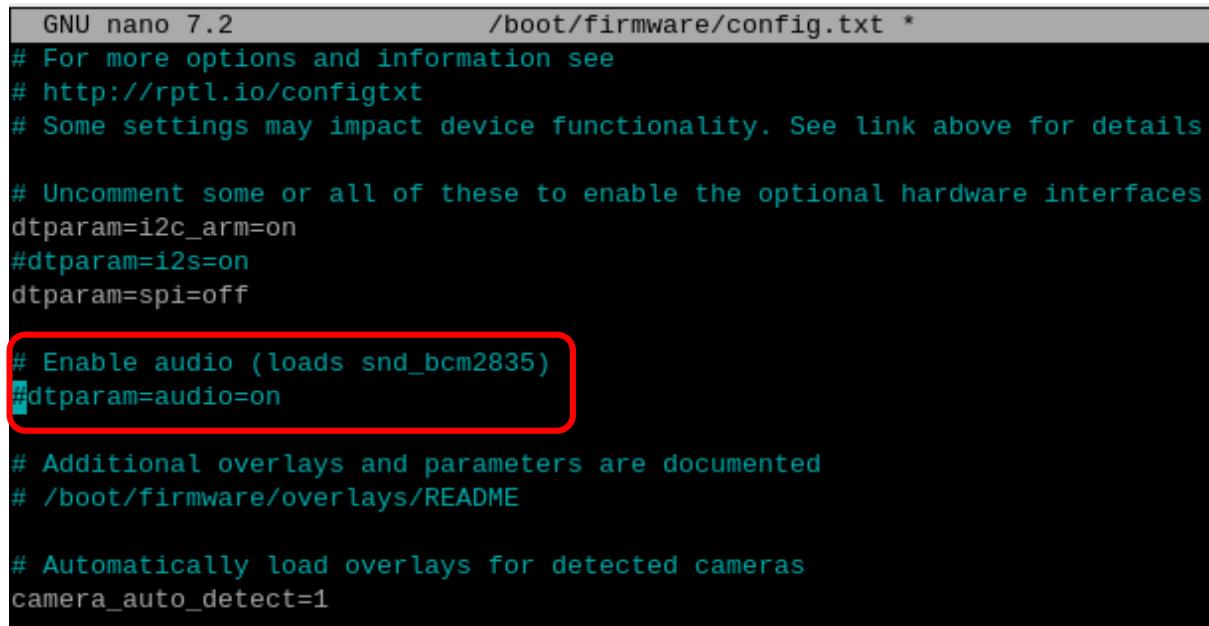

```
GNU nano 7.2          /boot/firmware/config.txt *
# For more options and information see
# http://rptl.io/configtxt
# Some settings may impact device functionality. See link above for details

# Uncomment some or all of these to enable the optional hardware interfaces
dtparam=i2c_arm=on
#dtparam=i2s=on
dtparam=spi=off

# Enable audio (loads snd_bcm2835)
#dtparam=audio=on

# Additional overlays and parameters are documented
# /boot/firmware/overlays/README

# Automatically load overlays for detected cameras
camera_auto_detect=1
```

It will take effect after restarting, and you can restart after executing the next section.

If you want to restart the audio module, just restore the content modified in the above two steps.

Step 3 Execute the Installed Program

1. Execute the following command to enter the directory where robot code “setup.py” locates.

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code
```

2. Run setup.py

```
sudo python setup.py
```

```
pi@raspberrypi:~ $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code $ sudo
python setup.py
```

The installation program will automatically install pca9685 library, rpi_ws281x library and PyQt5 library, etc. When the installation is successful, please restart Raspberry Pi.

```
Now the installation is successful.
```

```
Please restart raspberry pi
```

If the installation fails as shown below

```
Some libraries have not been installed yet. Please run 'sudo python setup.py' again
```

Our solution is: Re-execute setup.py. After installing successfully, restart Raspberry Pi. Most installation failures are caused by a poor network.

```
sudo python setup.py
```

Chapter 2 Assembly of the Robot (Important)


You can watch this video while reading this chapter: <https://youtu.be/l4R5f8EvvPo>

We will help you with any concerns via support@freenove.com


Step 1 Installing Servo Base

Take out the disc servo arms from the servo package.

Use the middle hole of each group of holes



Fix each disc servo arm to the joints.

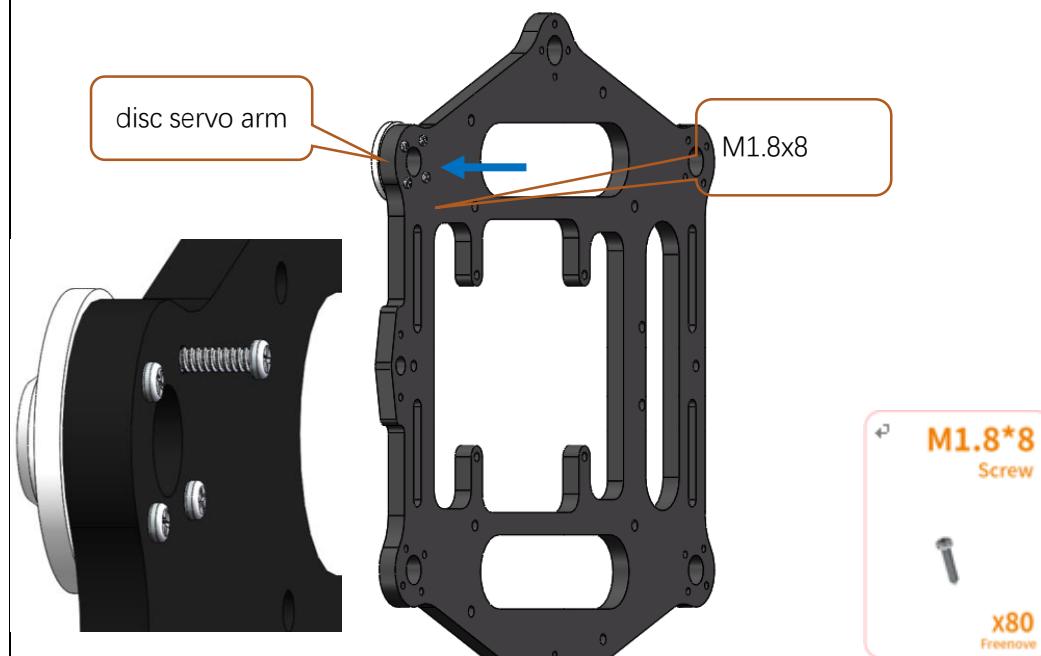




Step 2 Installing Servos

Installing Servos on the Legs

Install servos on the lower legs


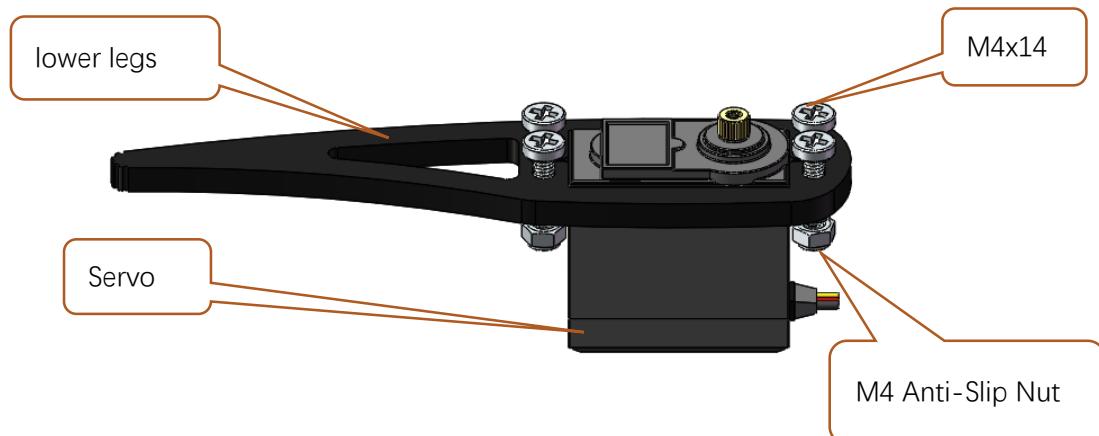


The other 5 leg parts are installed in the same way.

Note: The robot has six legs and its left lower legs and right lower legs are in different directions.




Installation of servos on the hip joints of the three left legs.

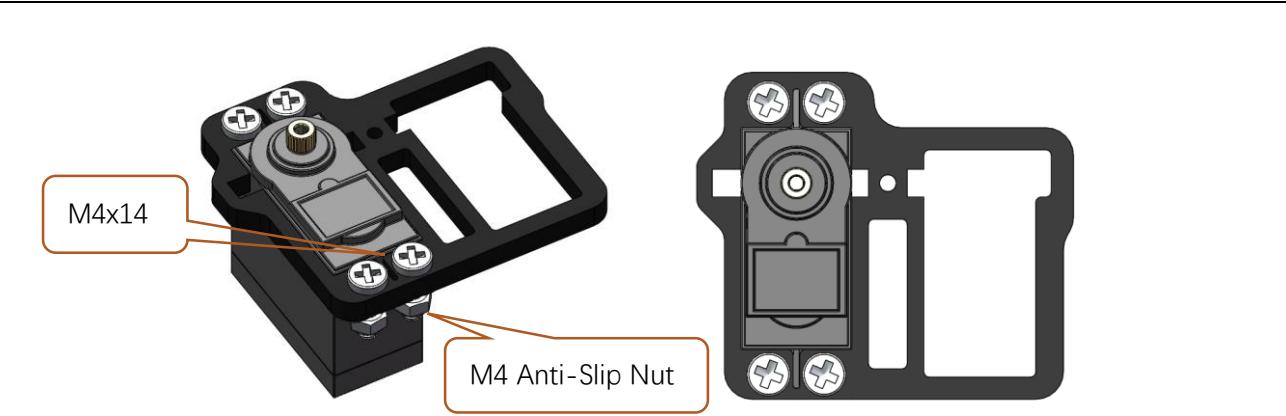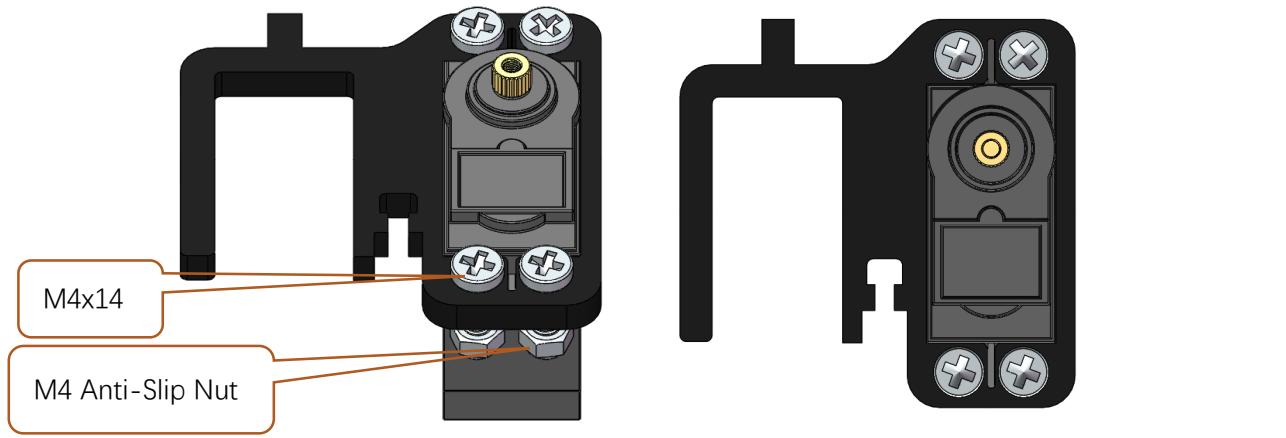


Assembly



Installation of servos on the hip joints of the three right legs.

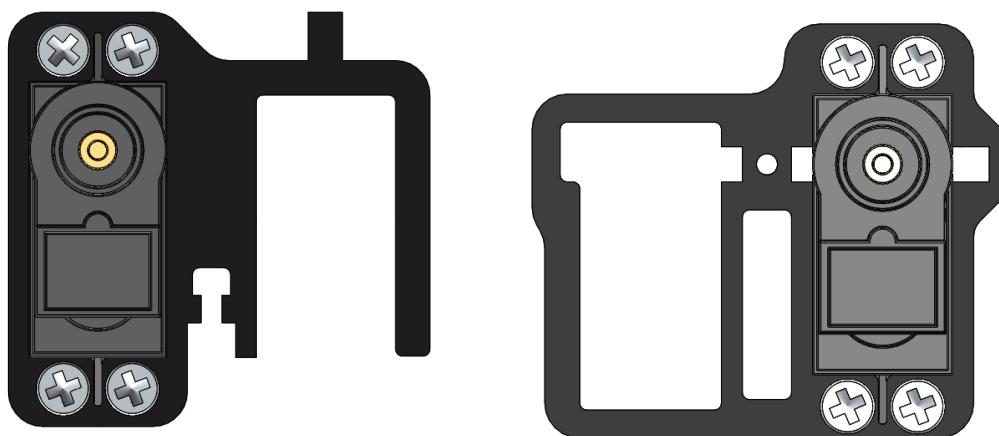

Assembly

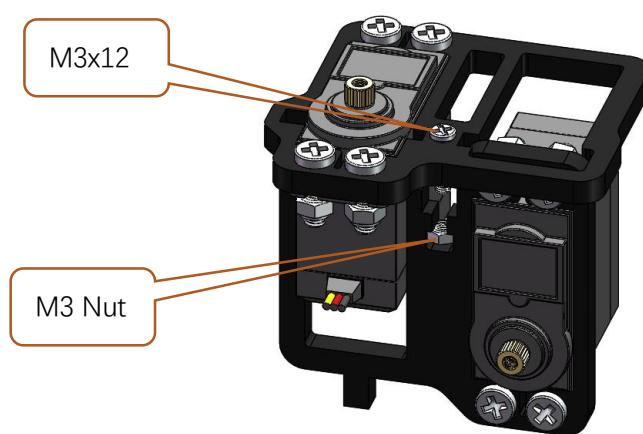


Servos at left and right hip joints (Note: the direction of servos on each side is different.)




Step 3 Assembling the center of the body

Installing Control Board

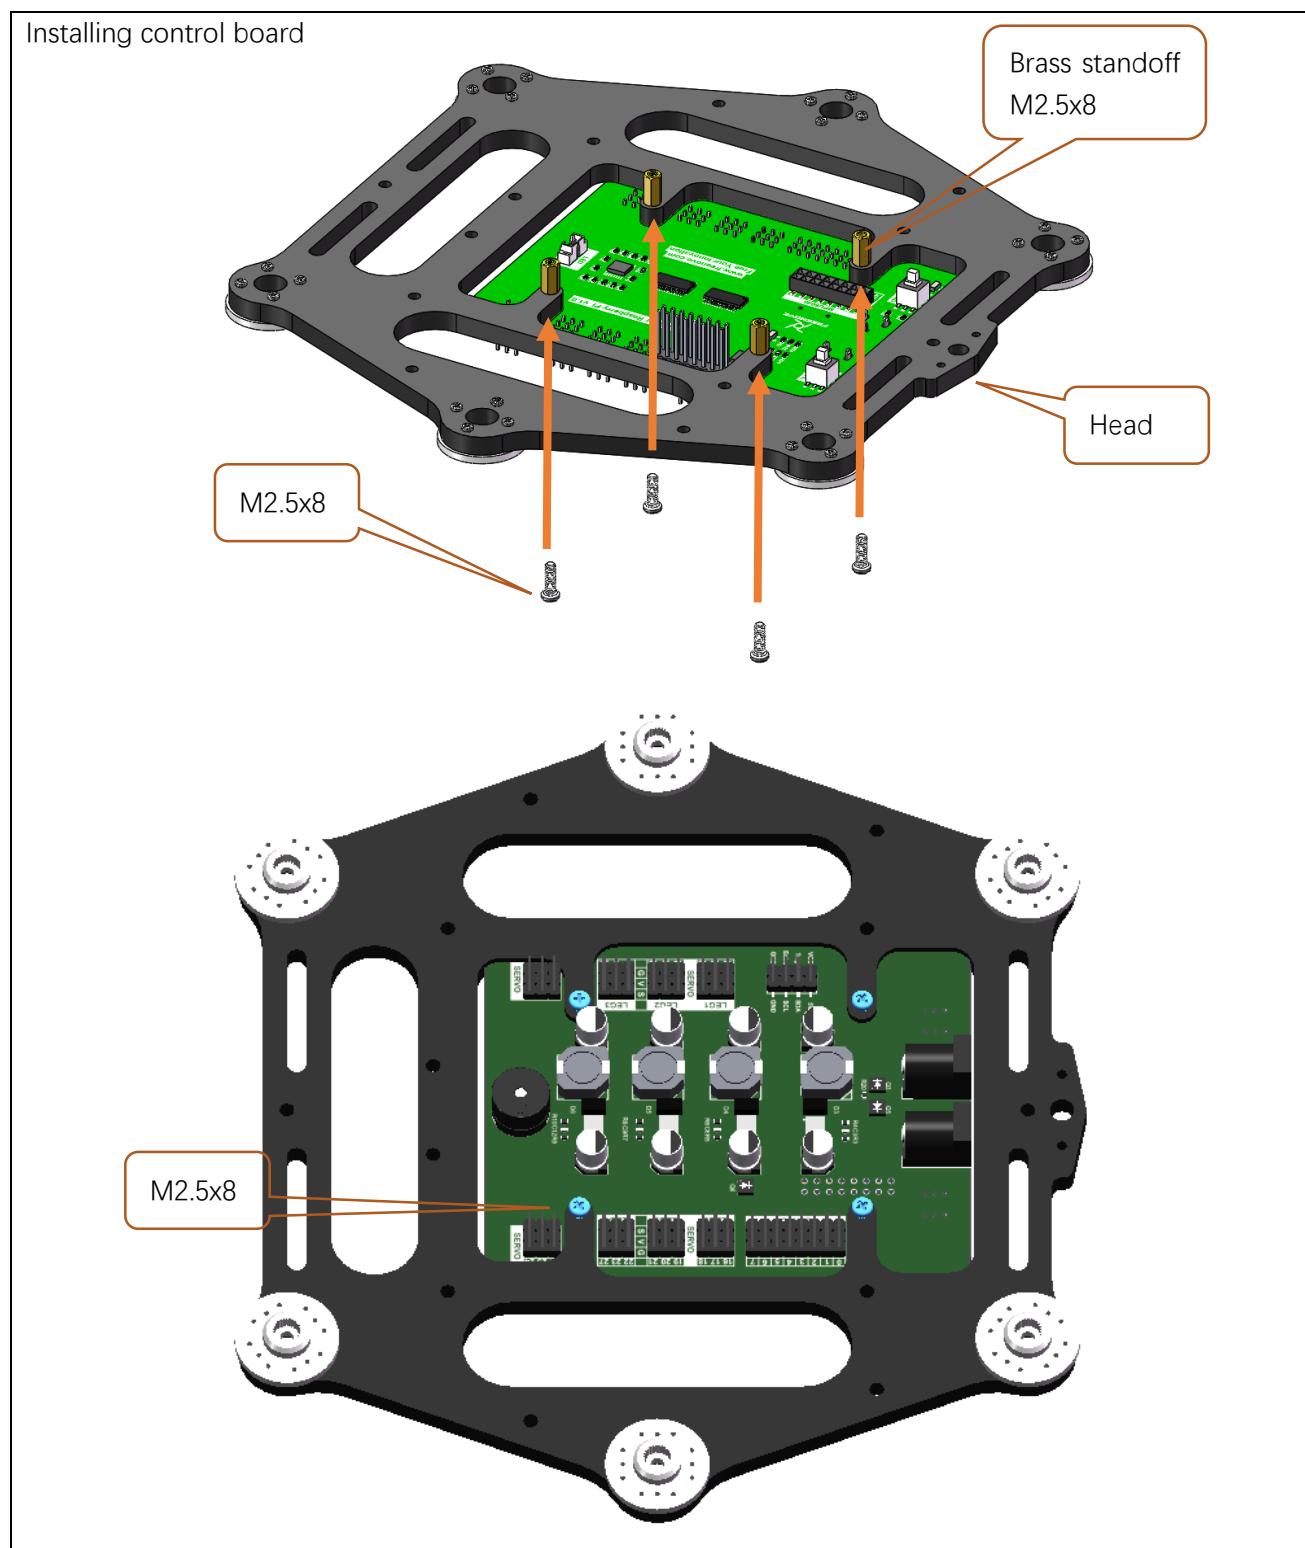


Installing LED Module

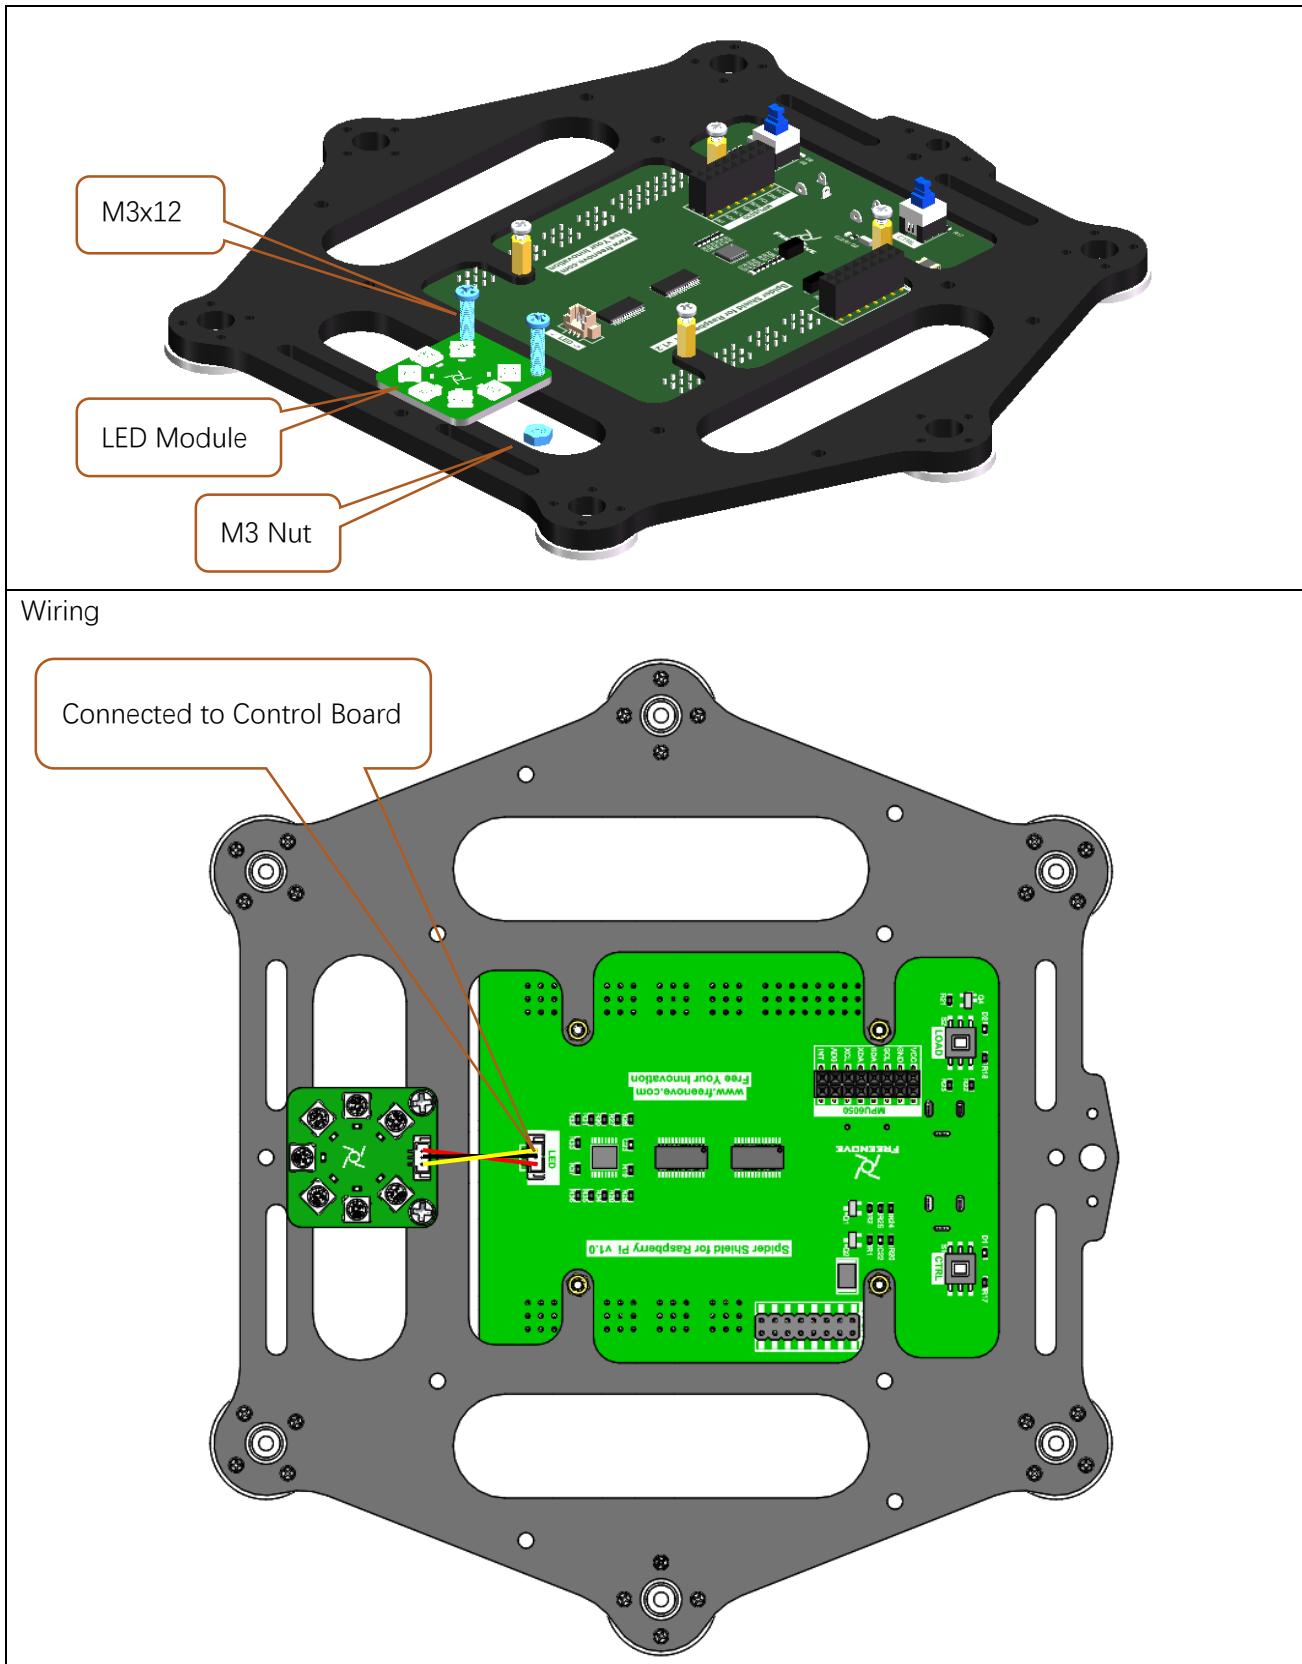


Installing MPU6050 Module

Note: There are two rows of female header, please plug the module into the right.

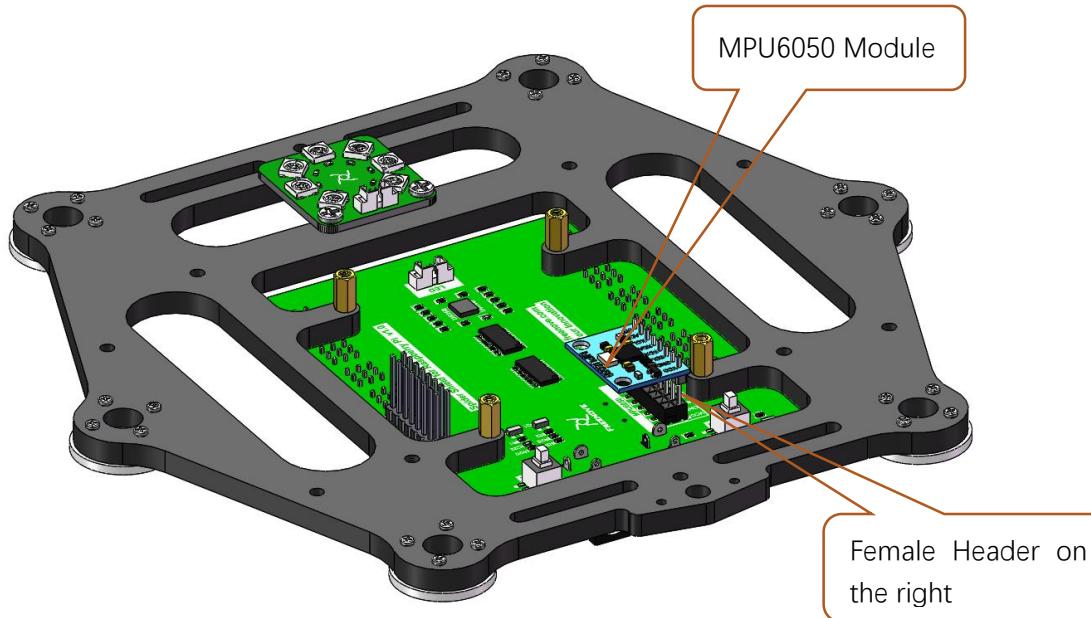


Installing Raspberry Pi

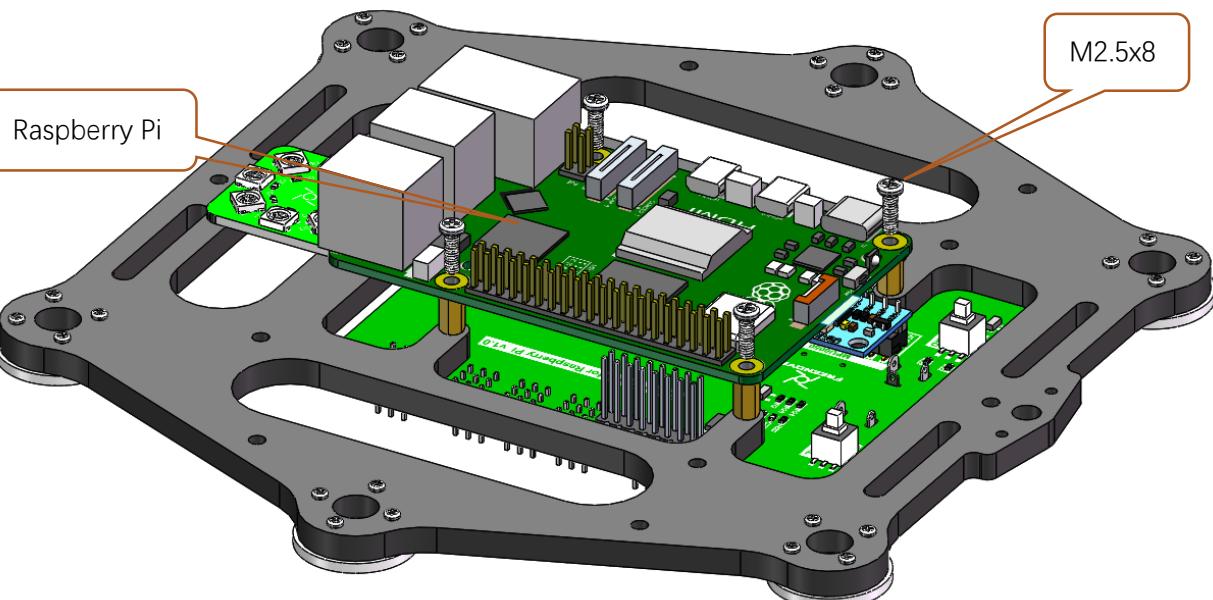

Installing Connector

Install the connection board


Press it until you can see the pins

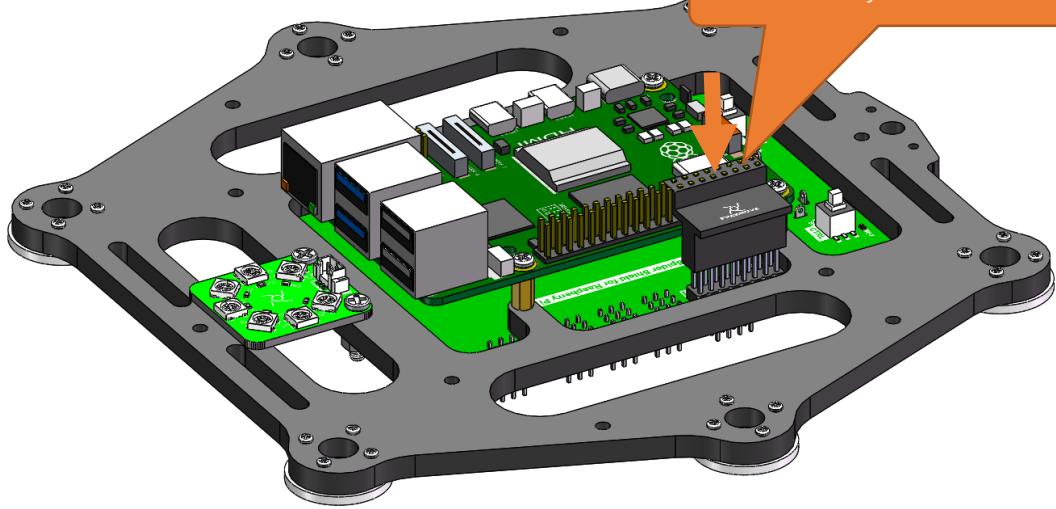

We have two types of connection boards, but they are installed in the same way.


See [here](#) for more information.

Connection board (PCB_V1.0)




Connection board (PCB_V2.0)


Not yet available for sale




Installing Brass Standoff

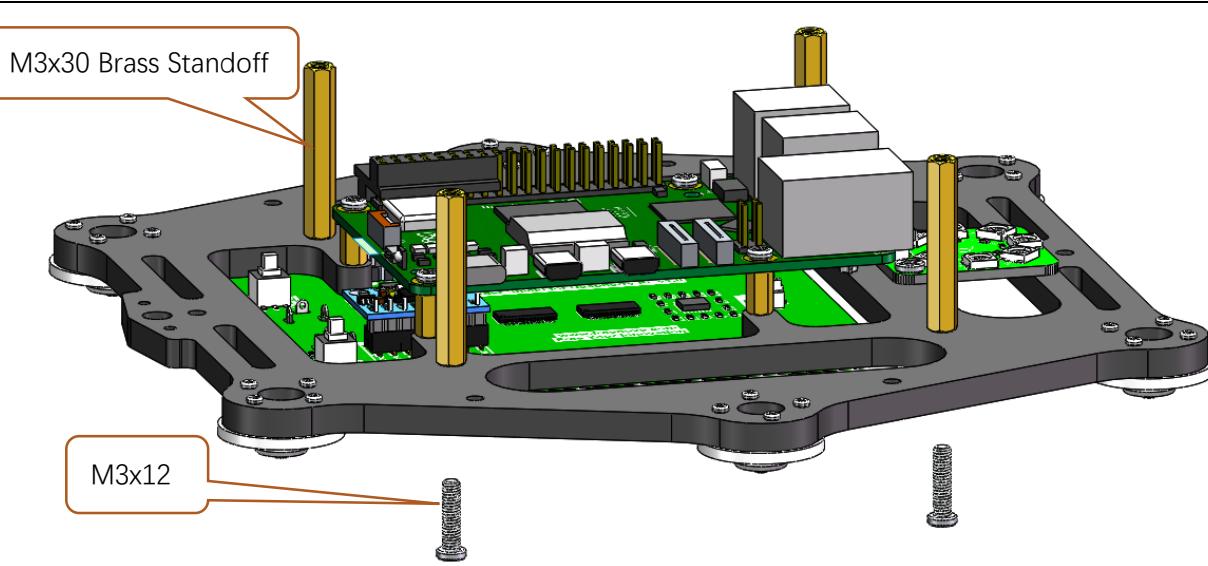


Installing Servo Arms

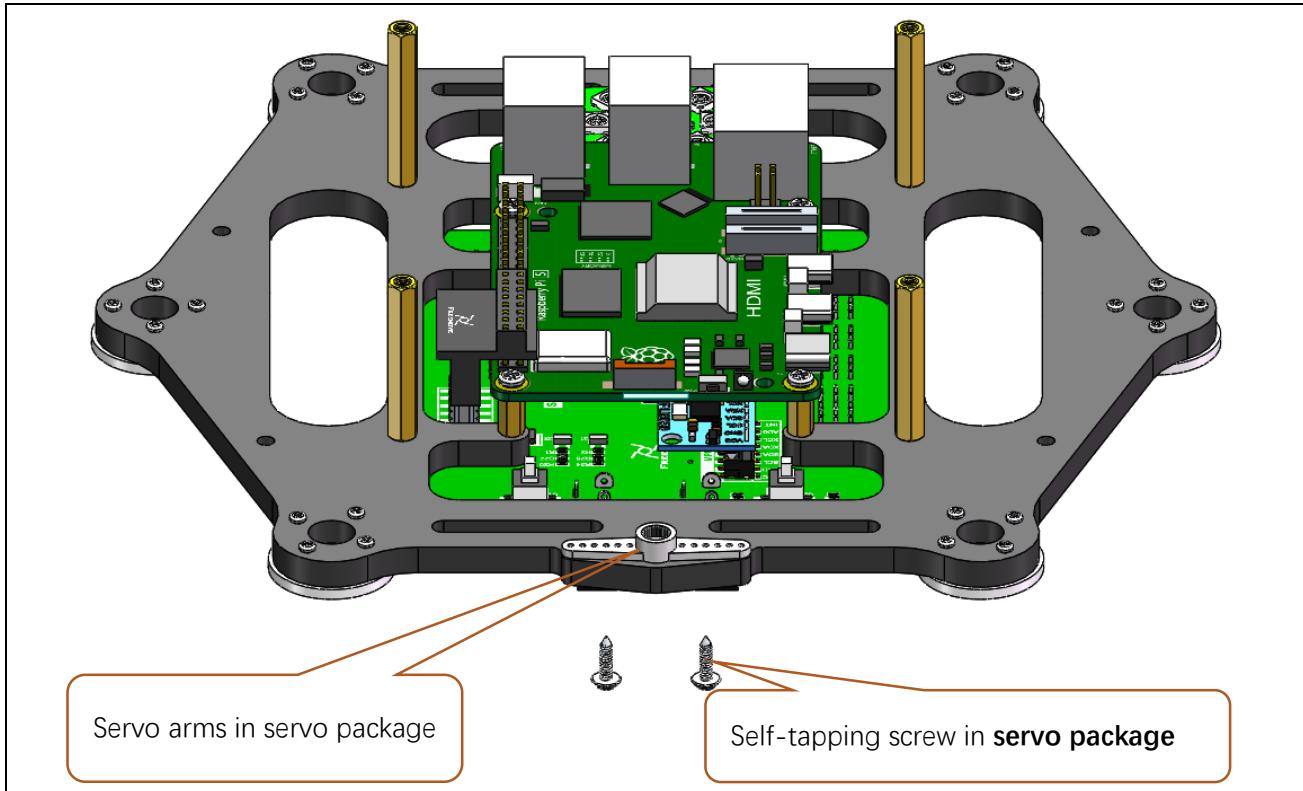

Step 4 Installing Battery Holder

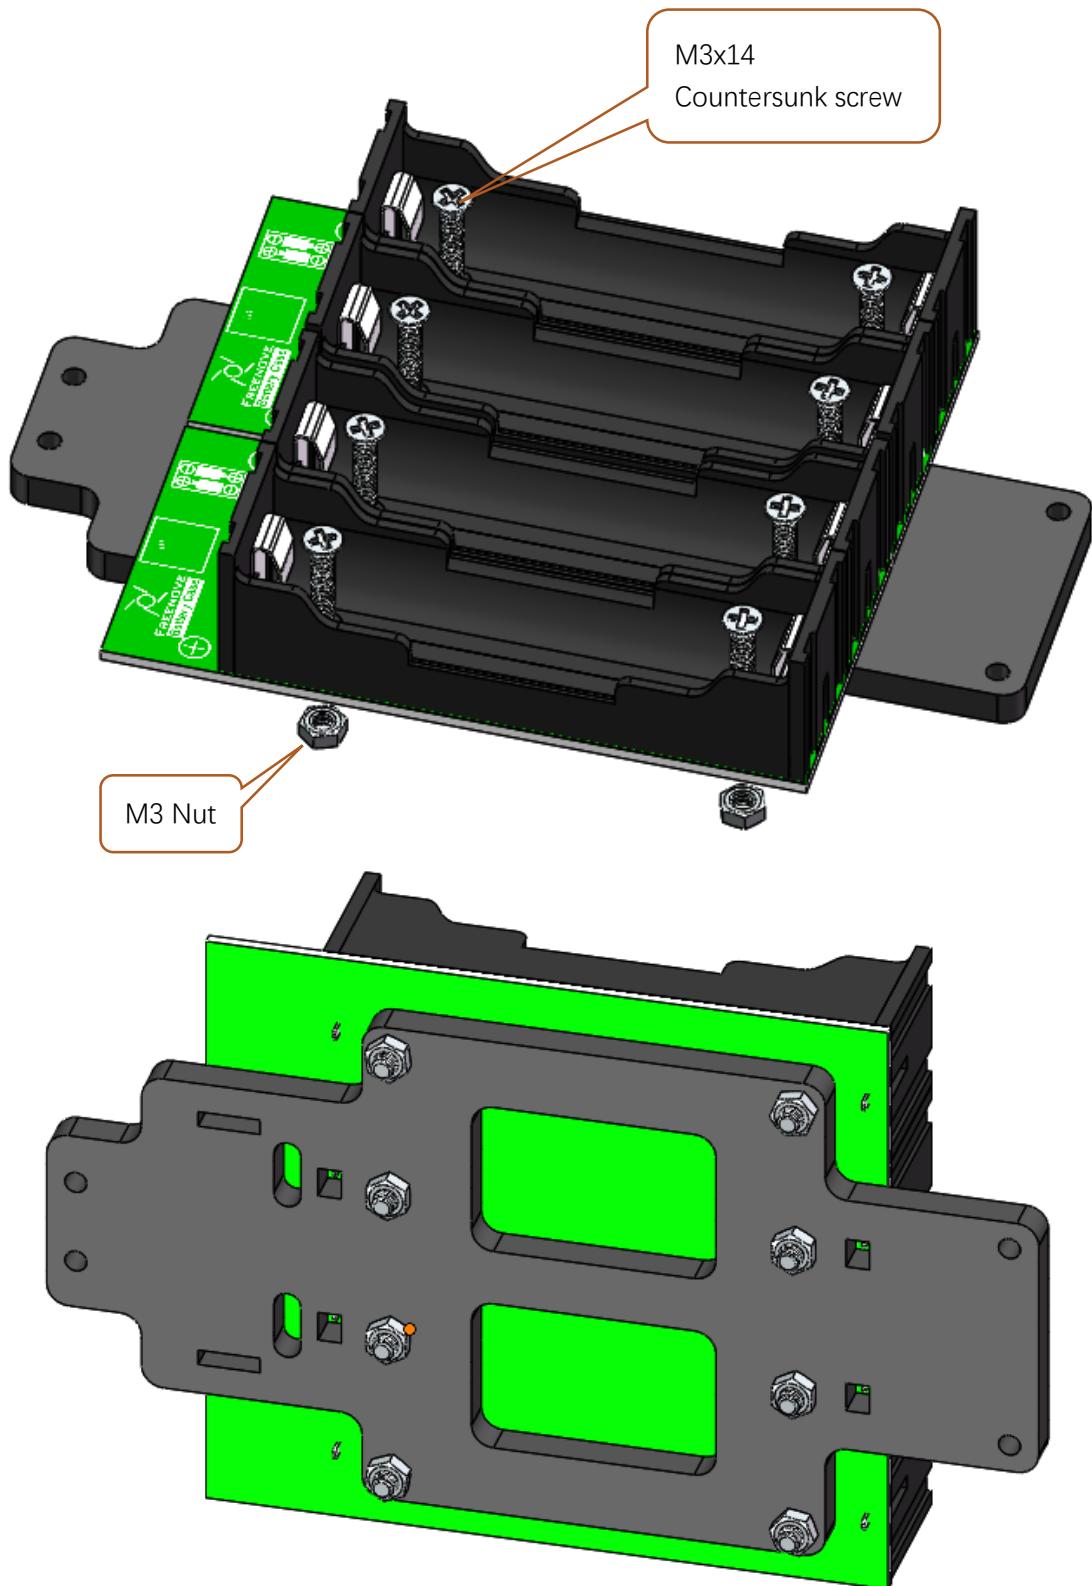

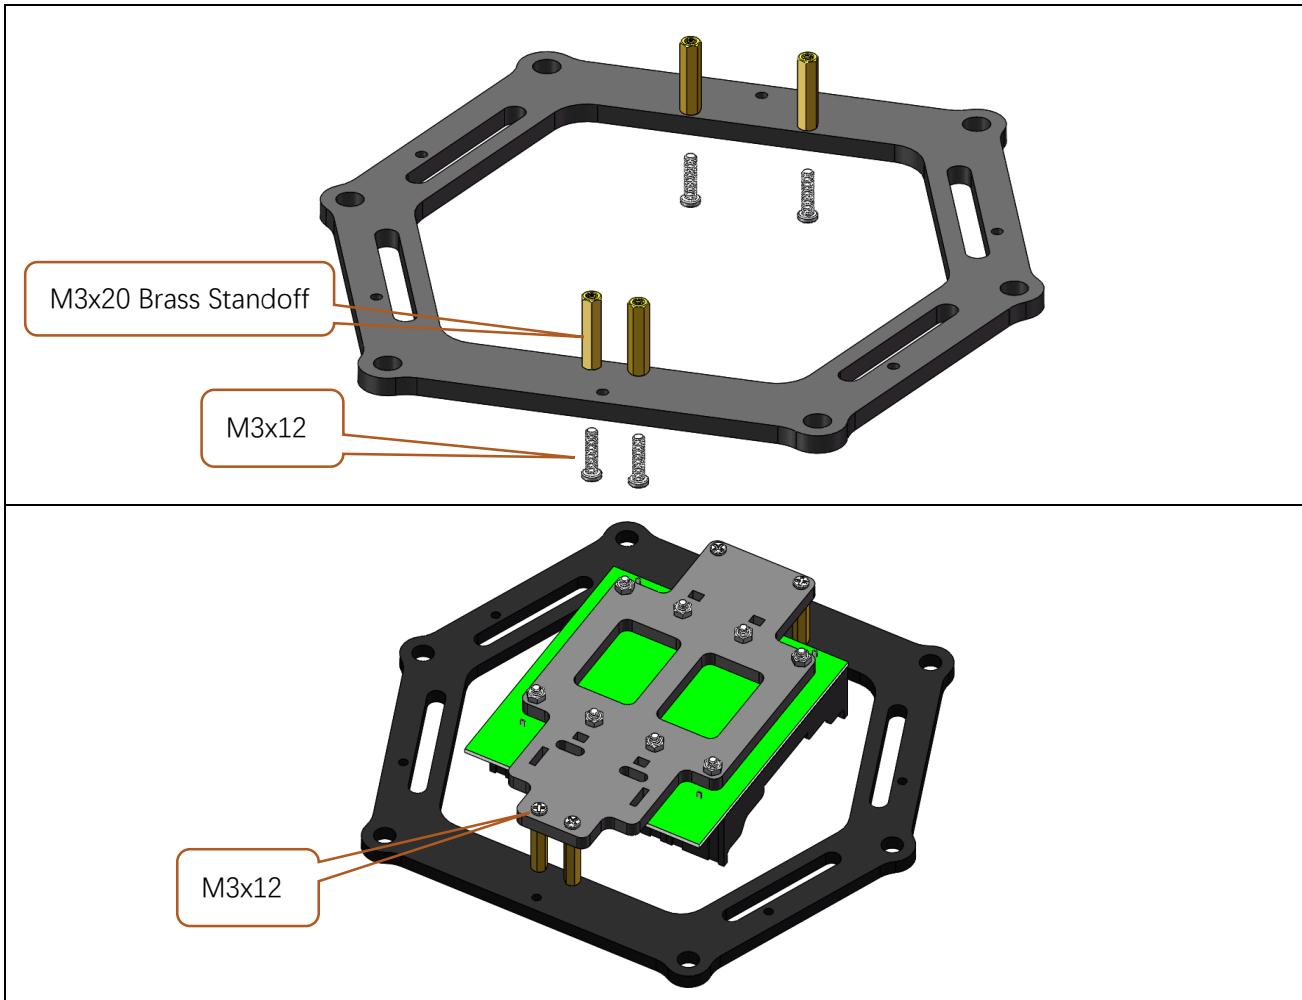


Step 5 Assembling Legs and Head to the Body


Run the servo installation program

Before installing, fix the servos at the specified angle. At this point you need to run the servo program.

Plug batteries into the battery holder. And then plug the battery holder to control board.

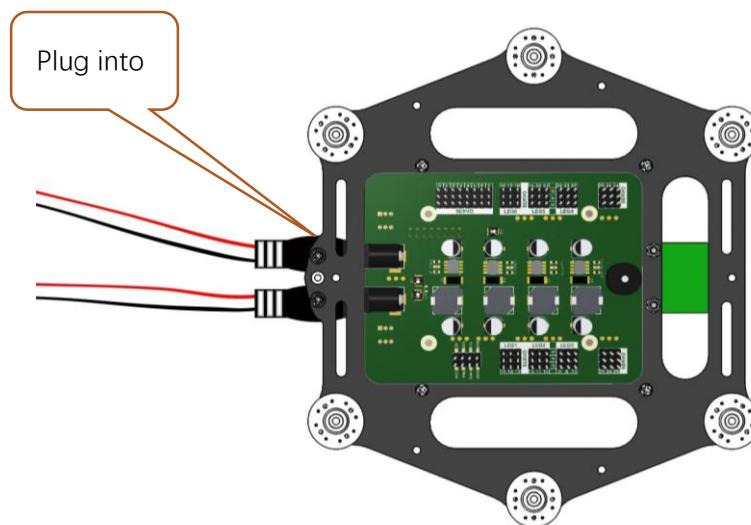

Press S1 and S2.

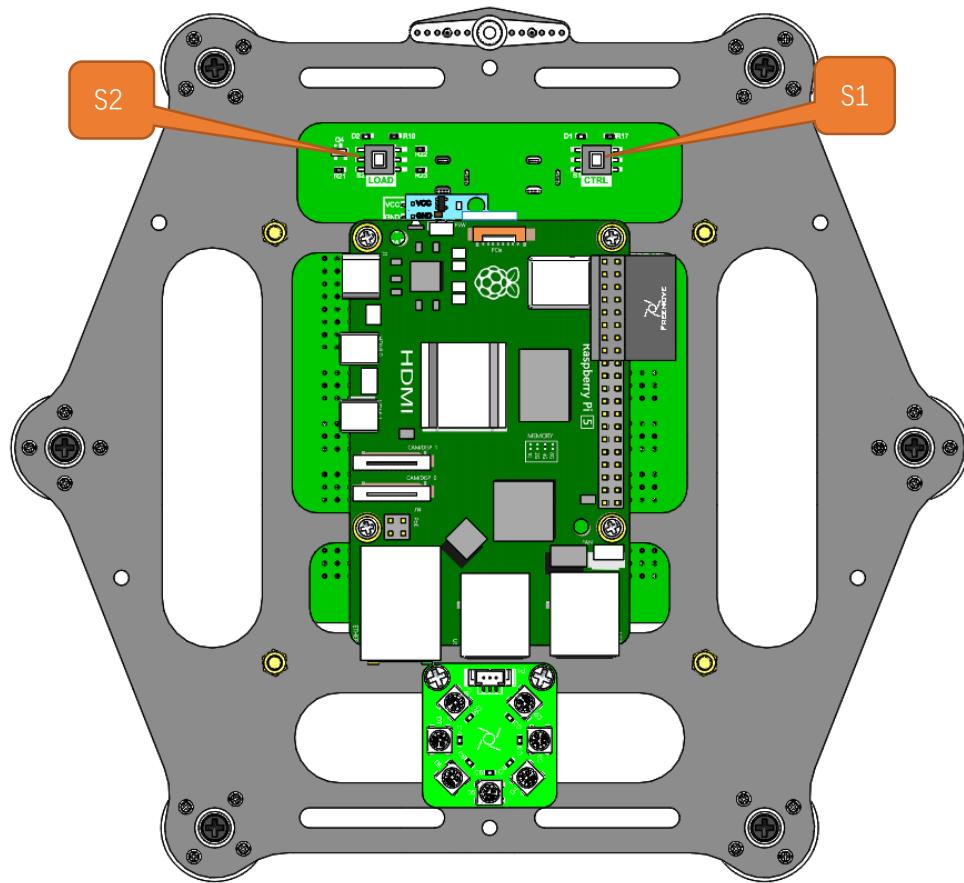

Open Raspberry Pi. (All contents in Chapter 1 should be executed correctly first. If not, please return Chapter 1 to finish it first.)

Enter the following command to enter the directory where the servo program locates.

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

b. Execute the following command to run "Servo.py".


```
sudo python Servo.py
```

```
pi@raspberrypi: ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server ~ ^ x
File Edit Tabs Help
pi@raspberrypi:~ $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python Servo.py
```


Next, fix each servo to the corresponding disc servo arm. **Do NOT pull the servo wires** during the installation process.

Installing Hip Joint

Connect the servo wires to corresponding servo port.

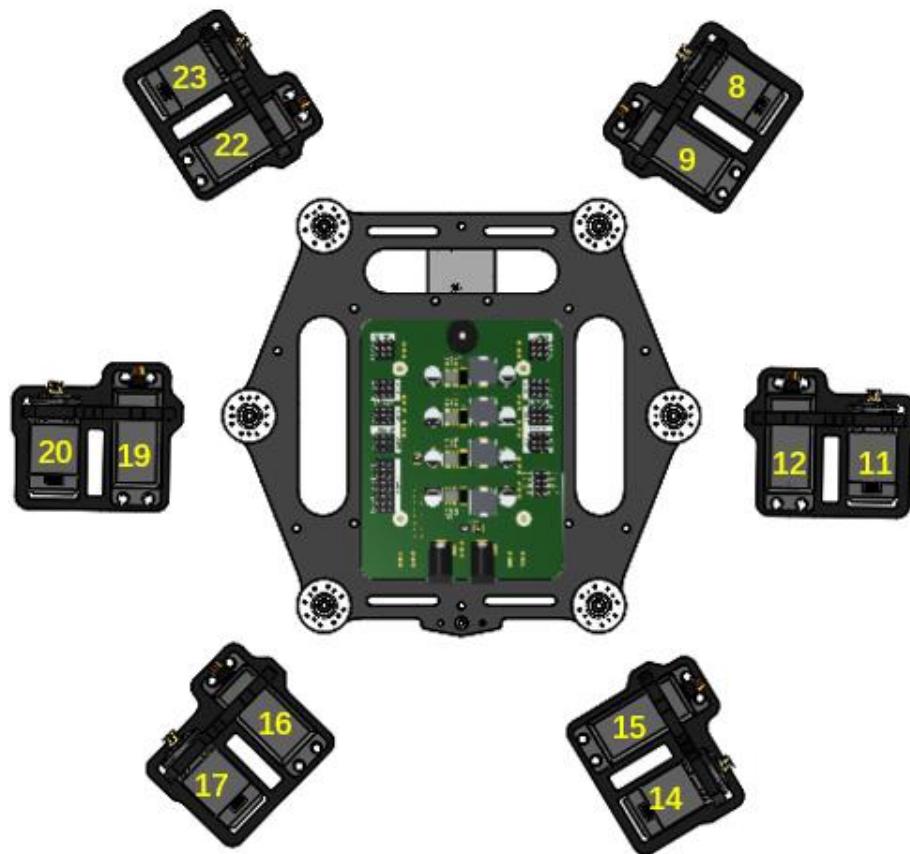


Bottom

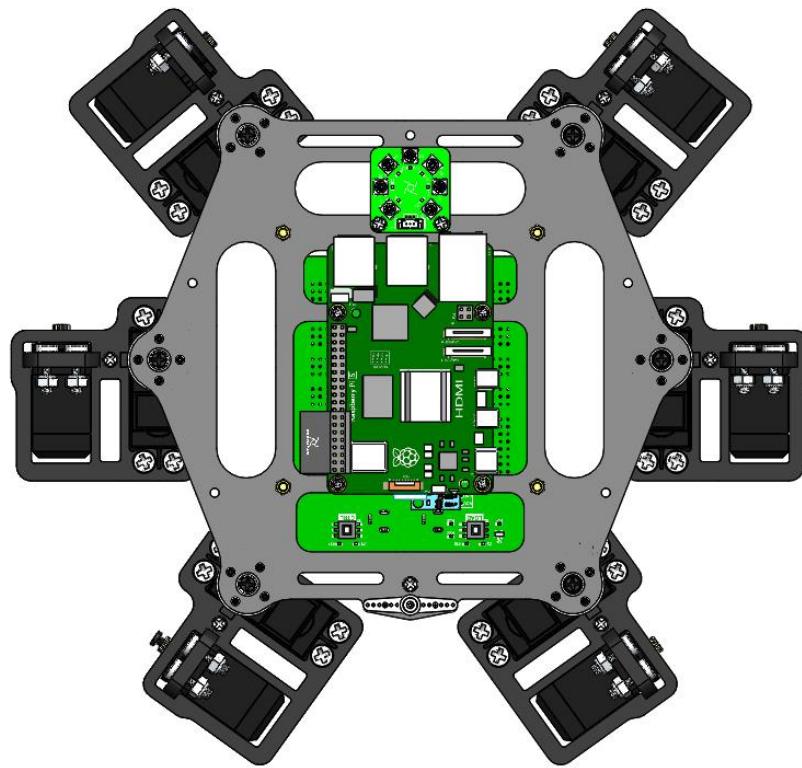


Top


Black screws in the servo package

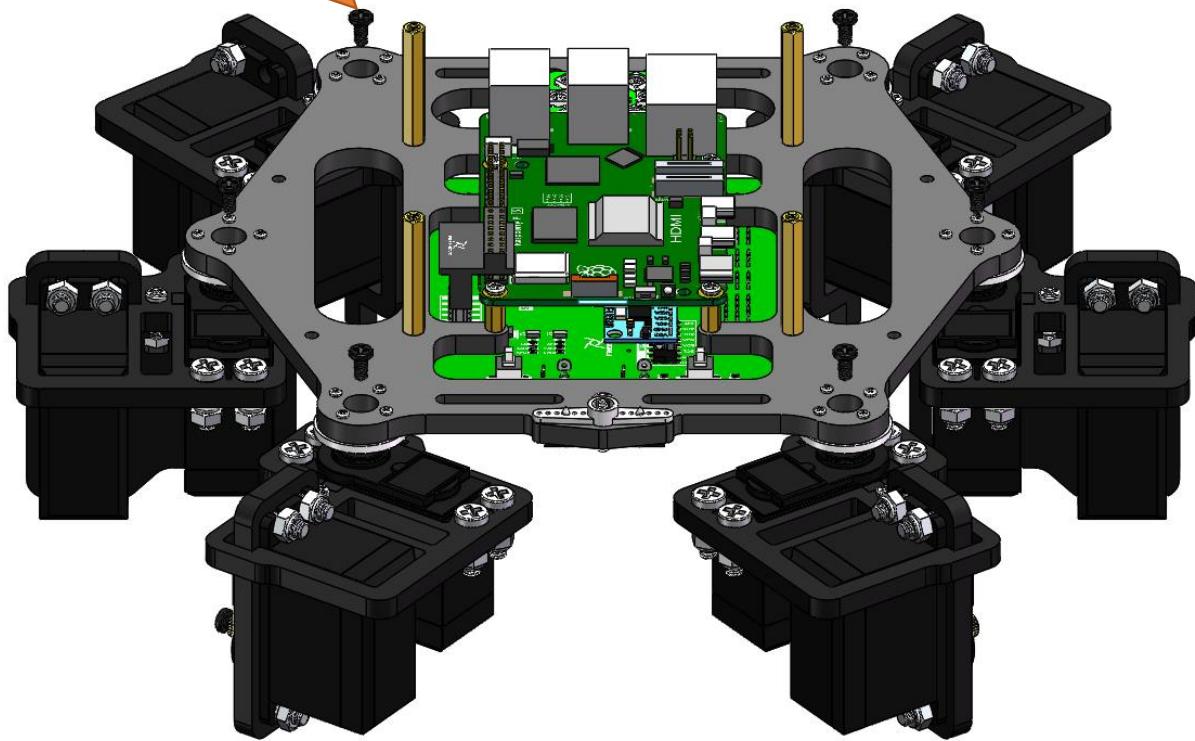


Installing Lower Leg and the Head


Connect the servo wires to corresponding servo port.

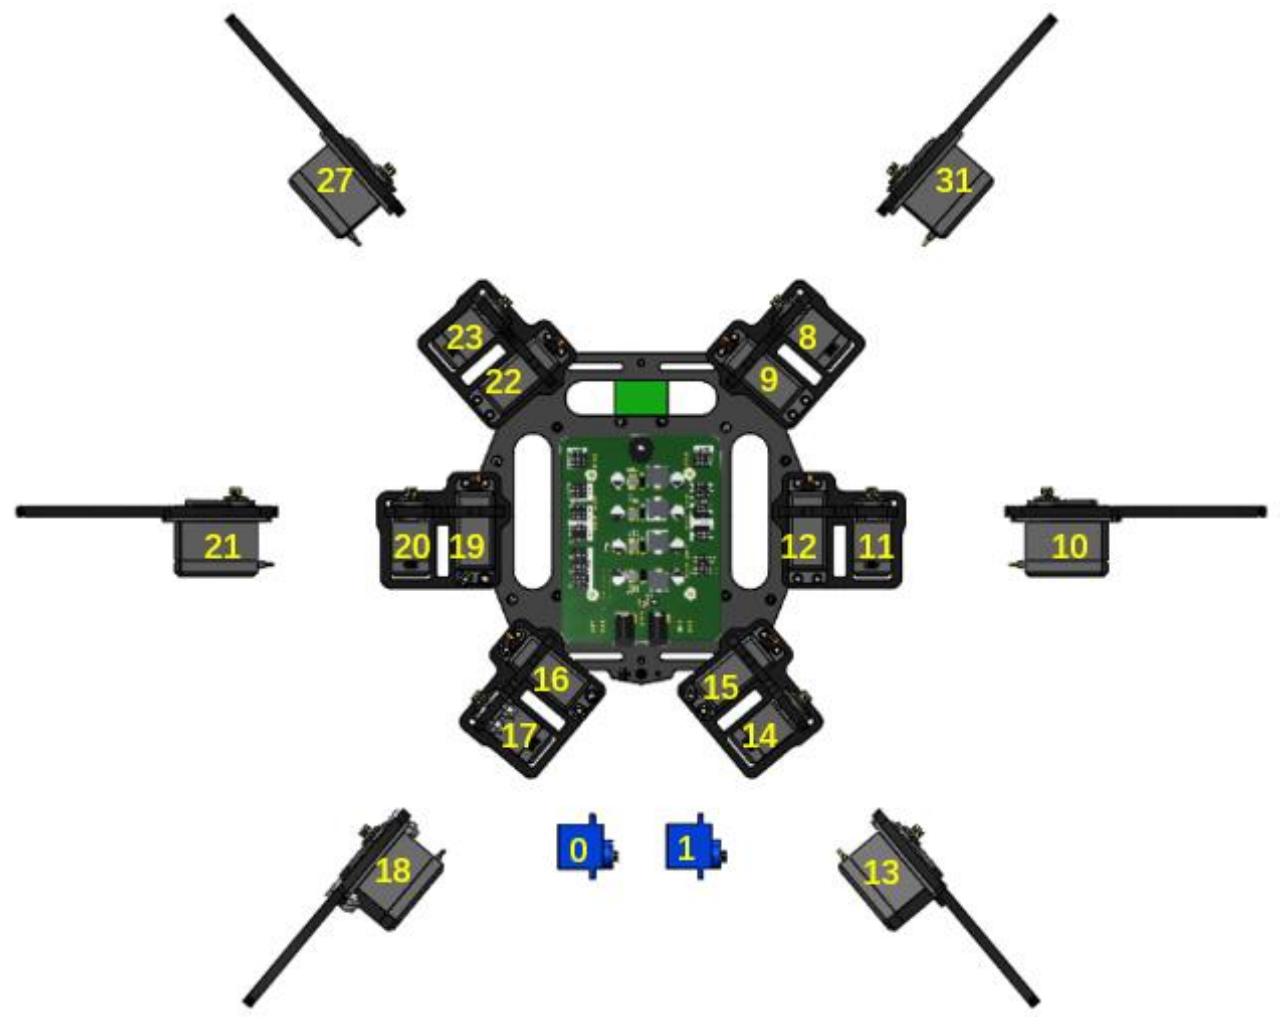

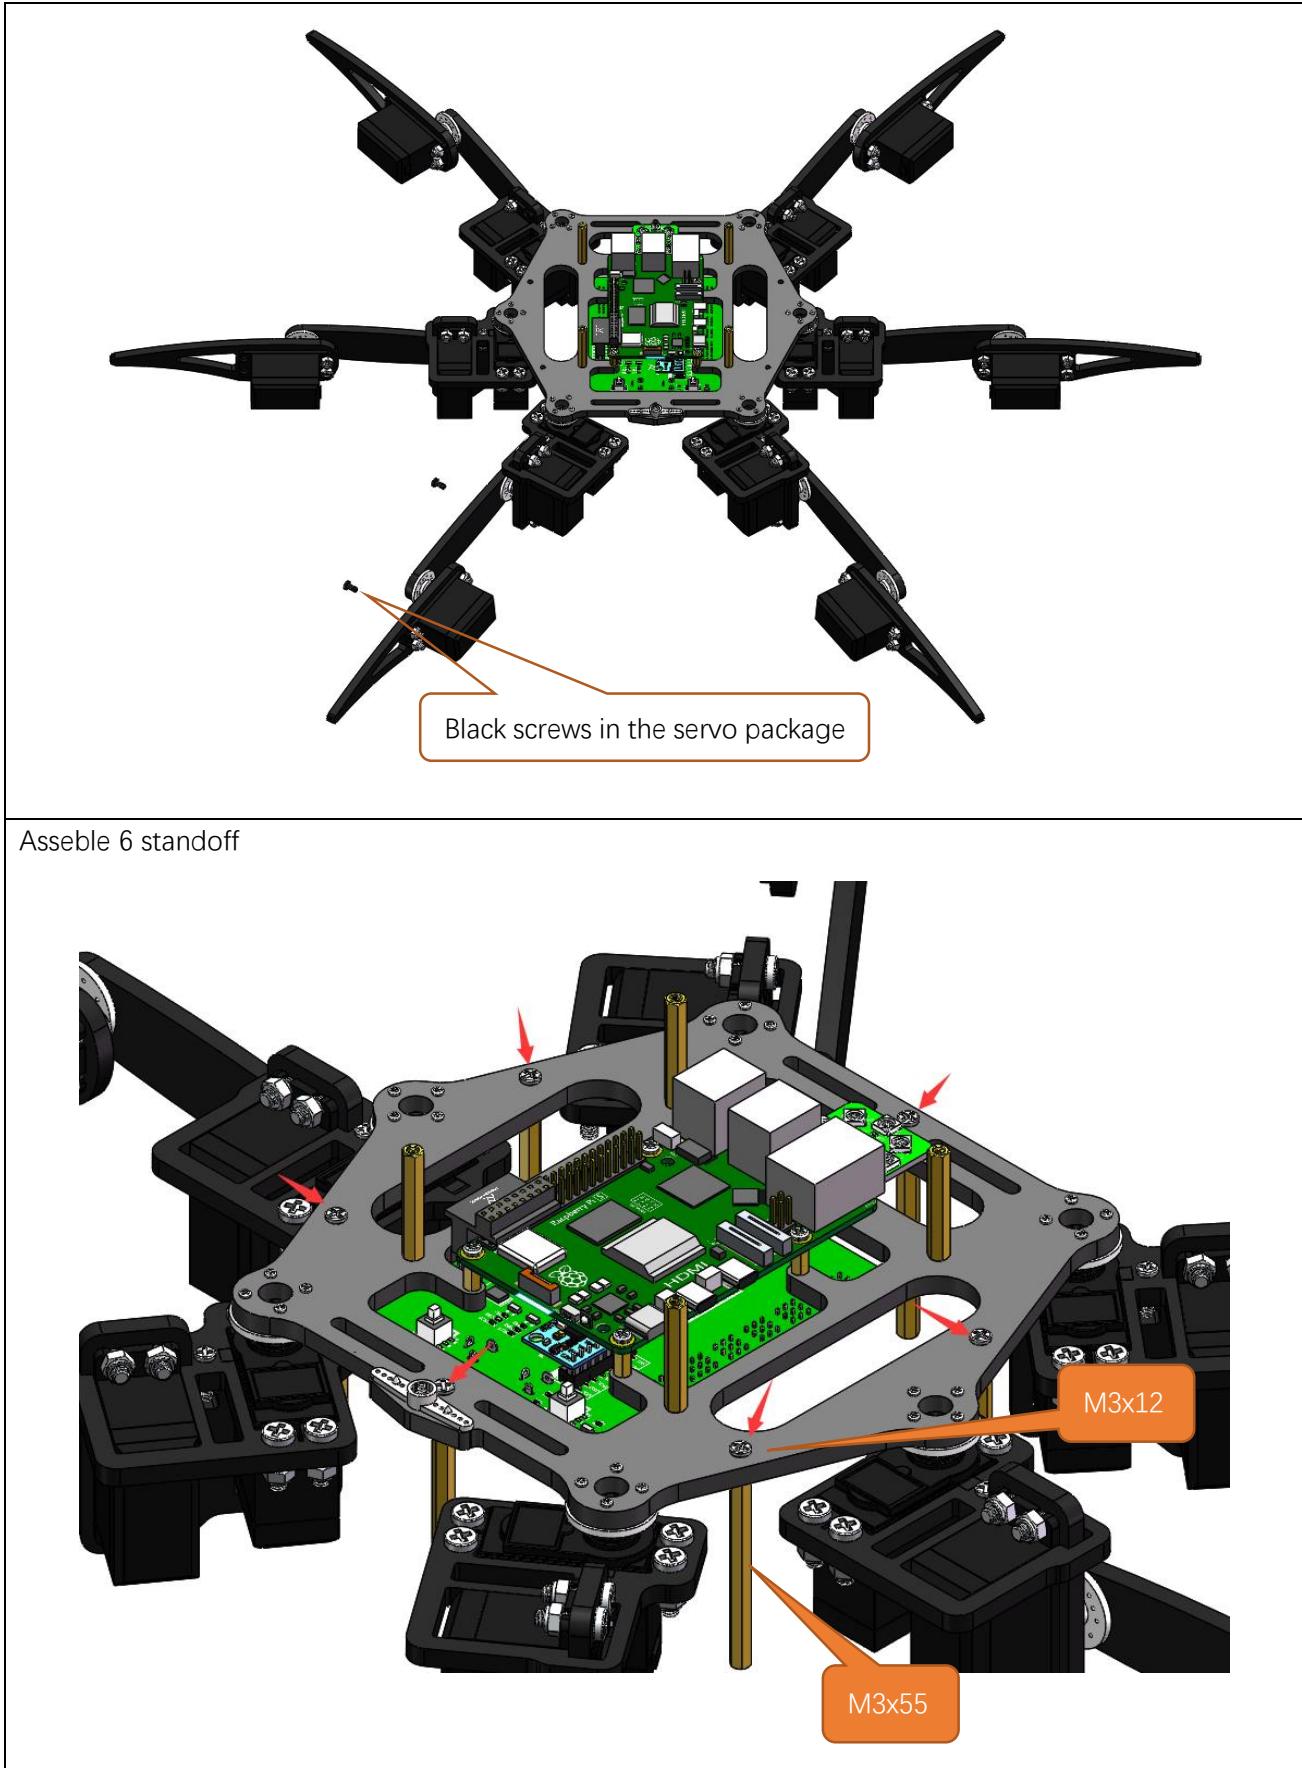



Connect a 4P cable which will be used later.

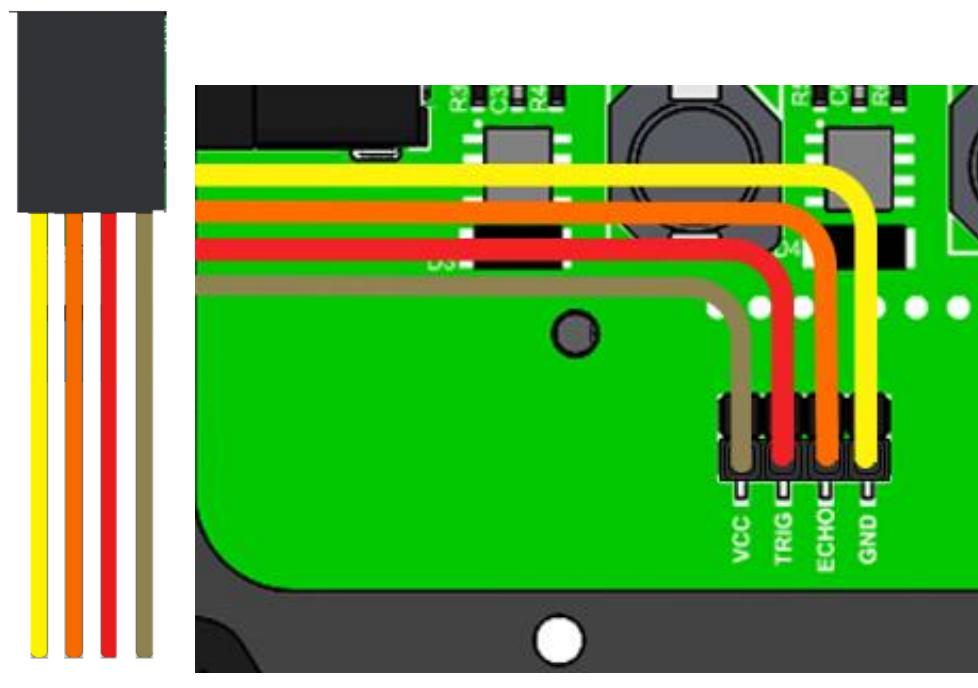

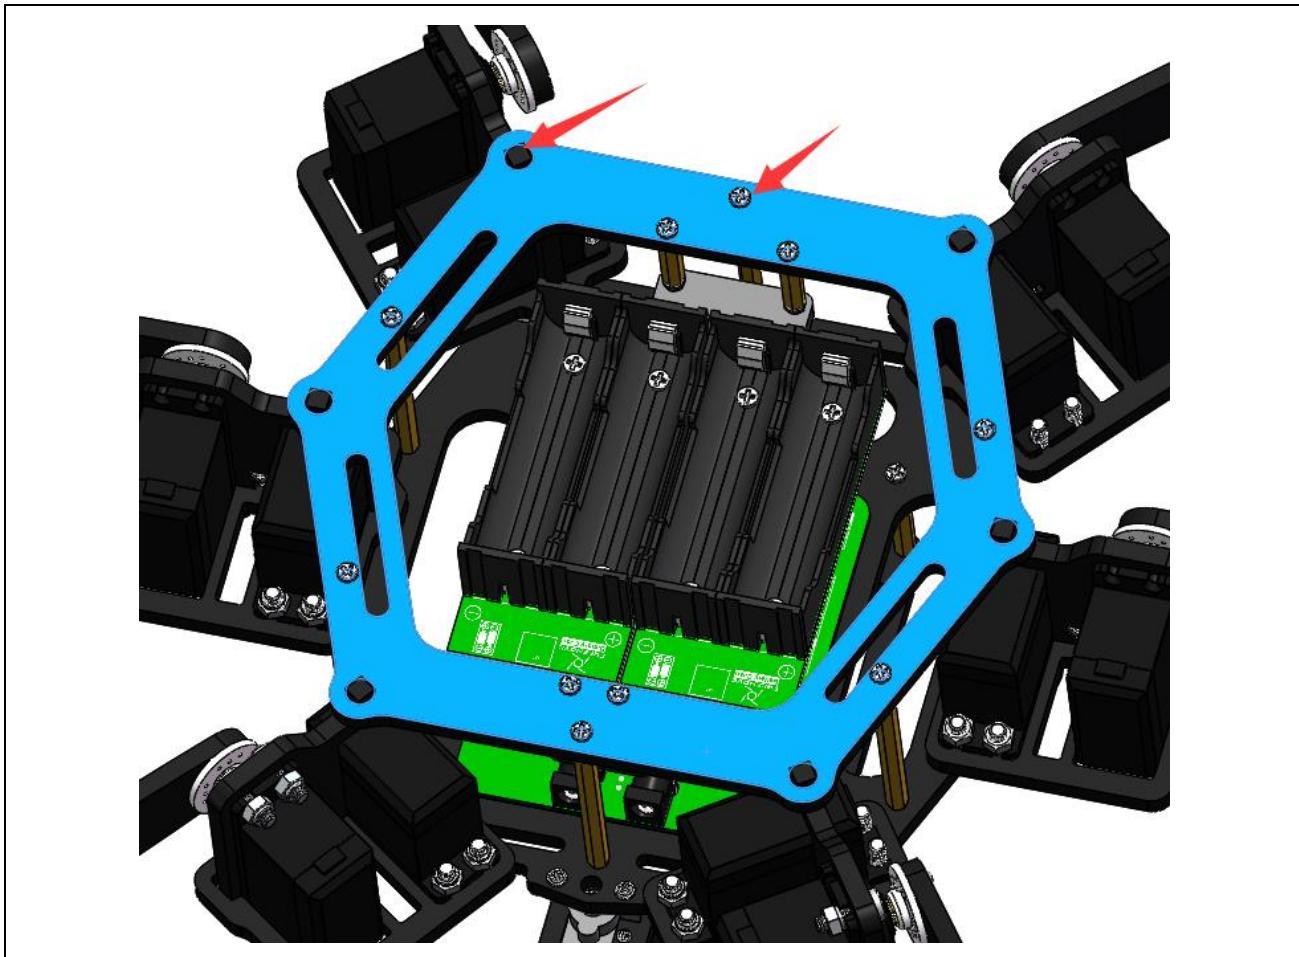



Installing head

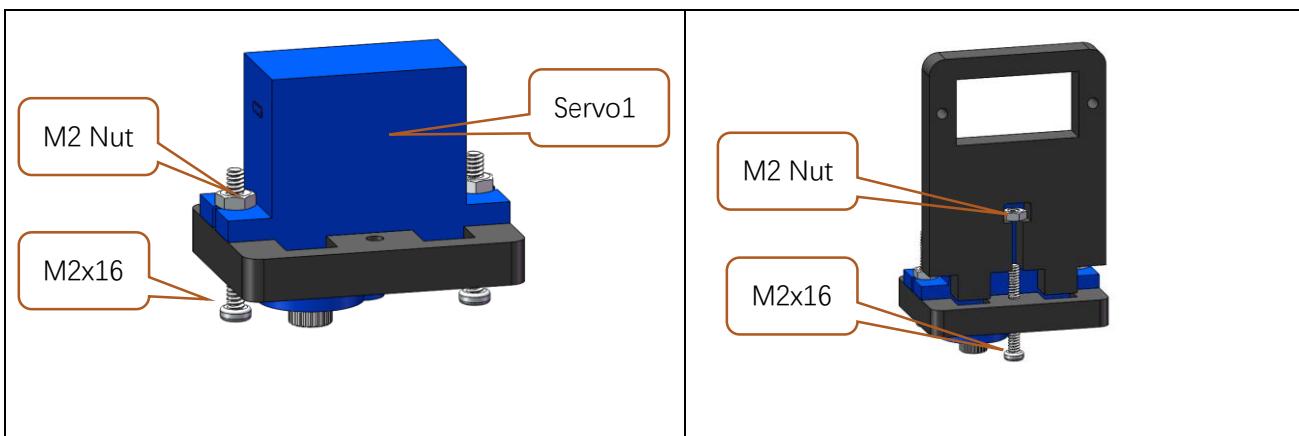

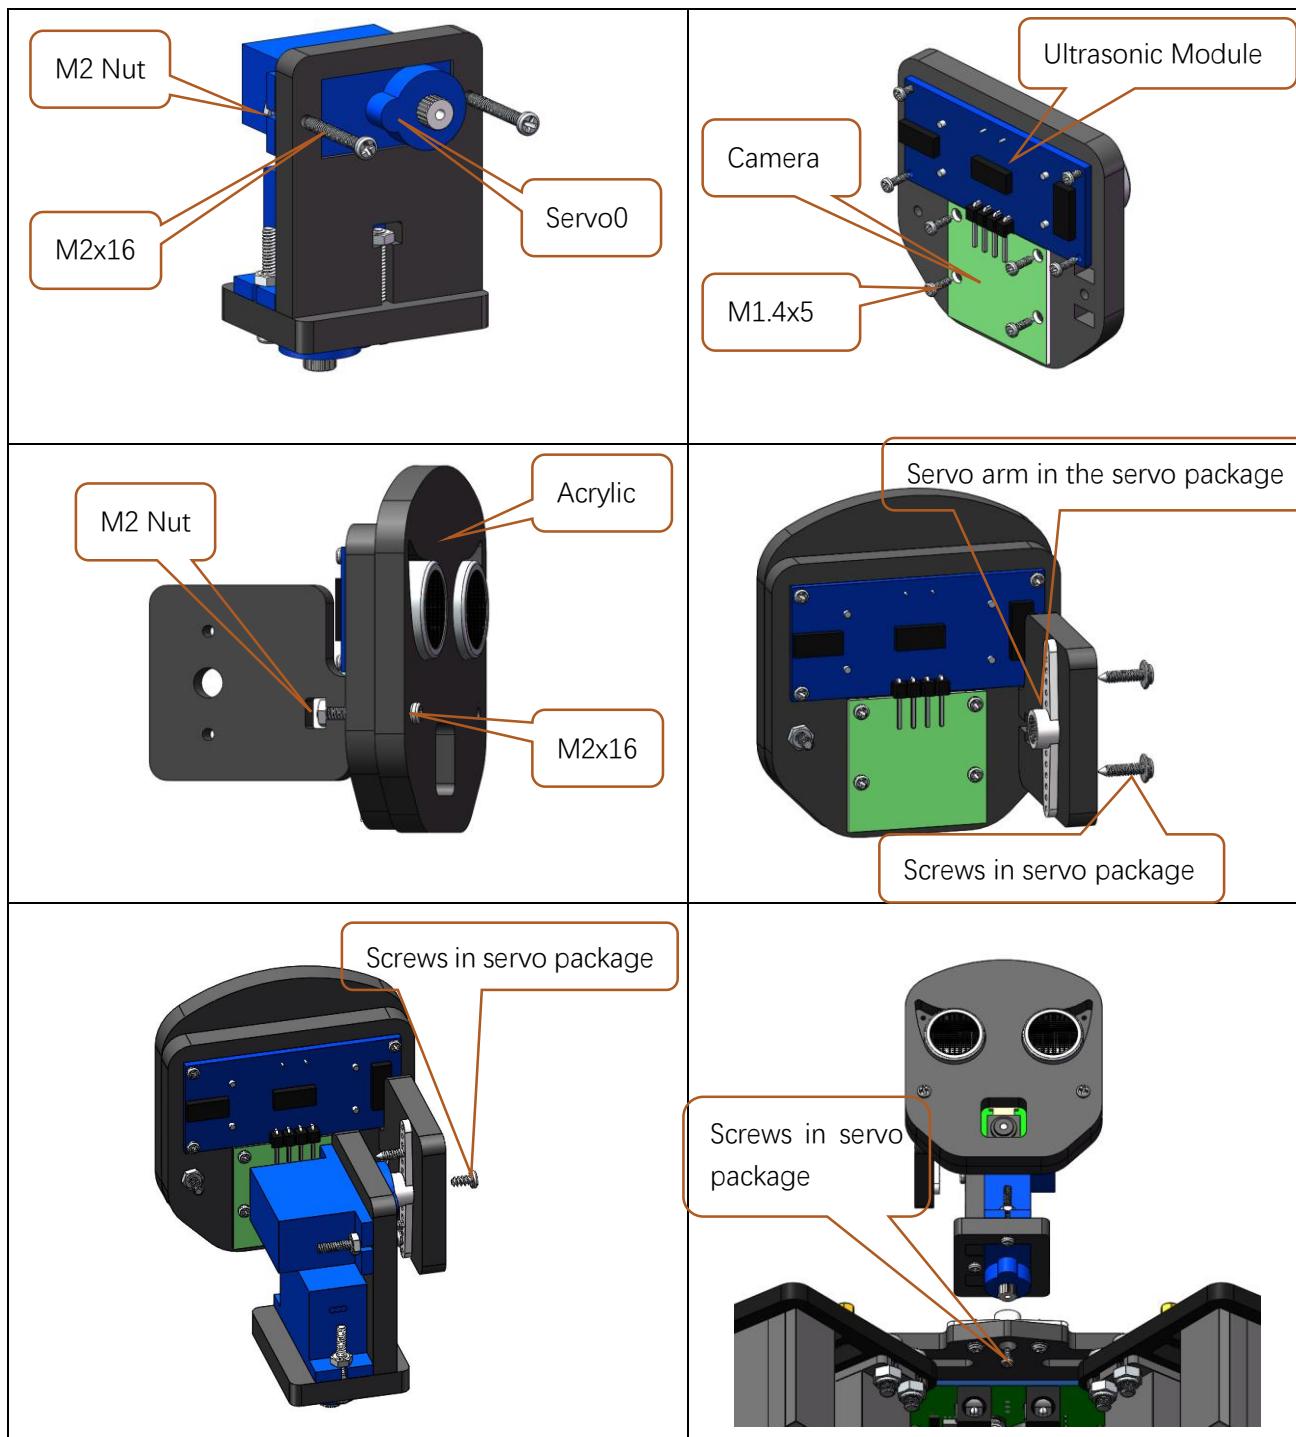


Connecting Wires of Camera and Ultrasonic Module

Connect camera wire

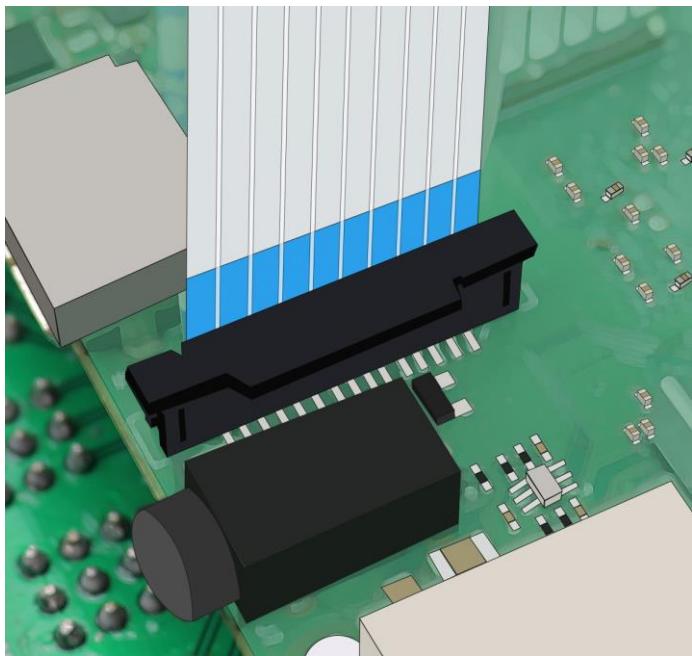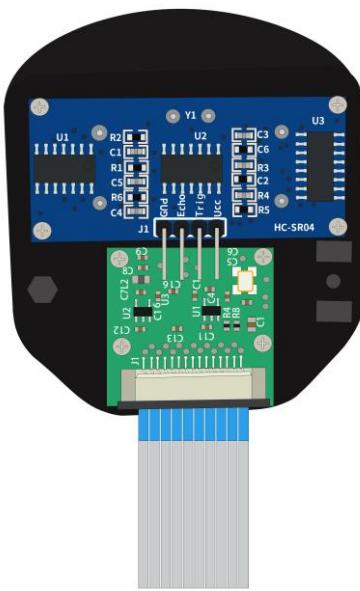


You need power off Raspberry Pi when wire camera.

After connected, it should be as follows

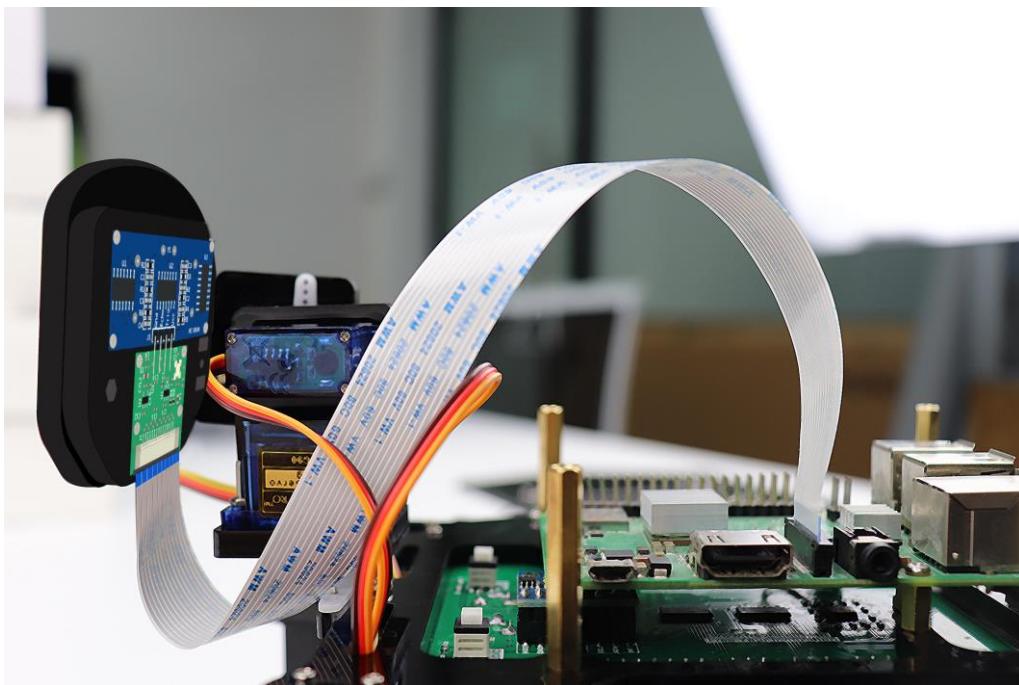


Connecting Ultrasonic Module

Note: VCC, Echo, Trig, GND are connected to VCC, Echo, Trig and GND on the connection board respectively. Do NOT connect them wrongly. Otherwise, it may burn out the Ultrasonic module.

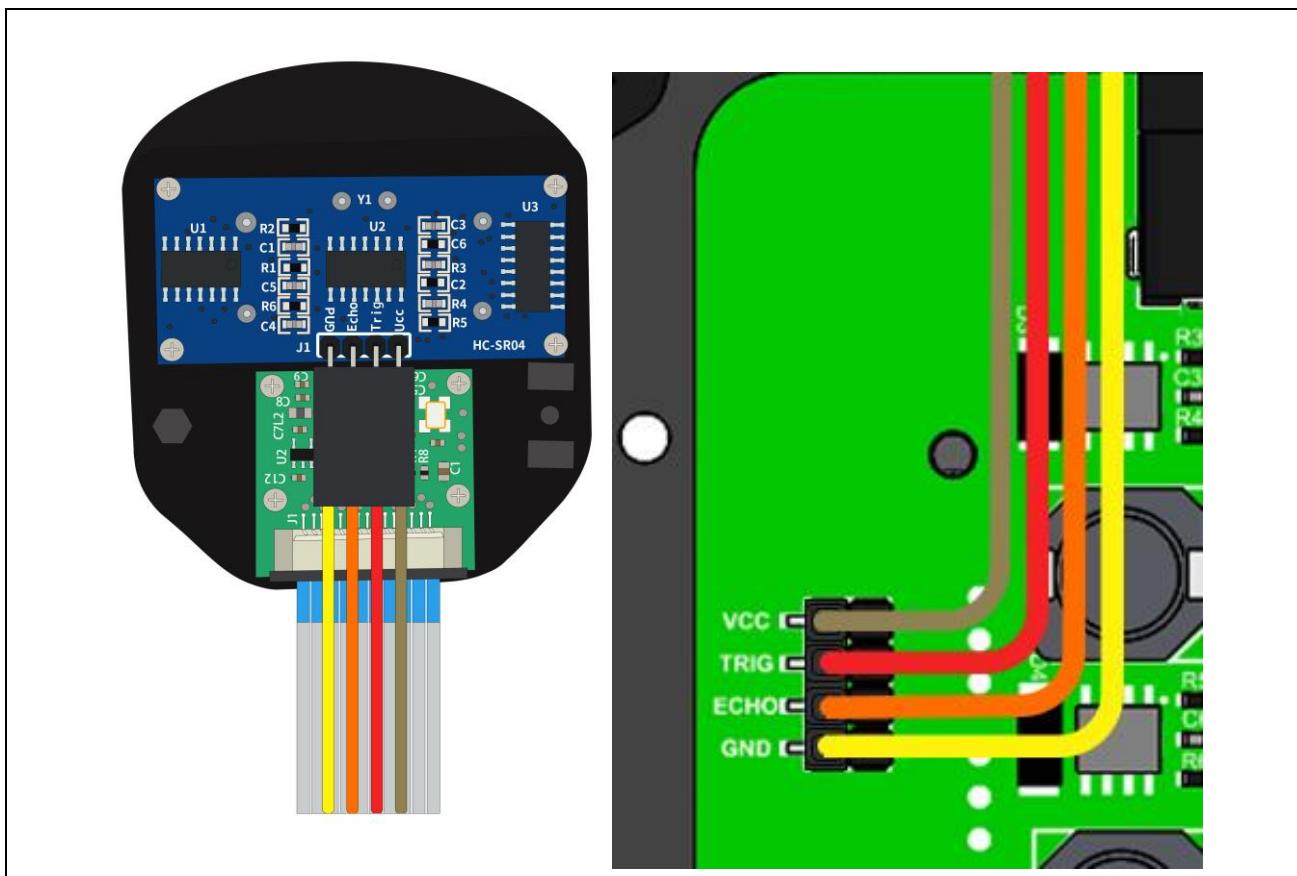

Step 6 Installing Base and Cover Plates

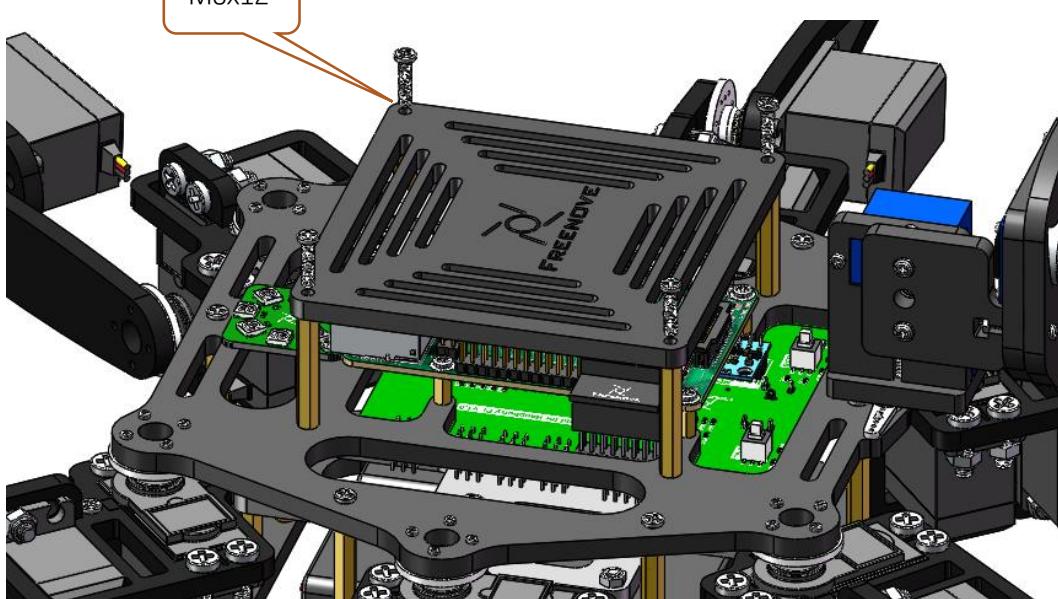

Congratulations! You have finished the assembly of the robot.

Chapter 3 Module Test (necessary)

In the previous chapter, we have assembled the robot. In this chapter, we will test all modules of the robot to see whether they work.

Before starting, please plug in the batteries, and switch ON S1 and S2. Place the assembled robot on a horizontal table and make sure that the wiring of each servo is correct.

If you have never learned python before, you can learn some basic knowledge via the link below:
<https://python.swaroopch.com/basics.html>

You can watch this video while reading this chapter:<https://youtu.be/D00LdVqXC5E>


We will help you with any concerns via support@freenove.com

Servo

Enter the following command to check I2C.

```
i2cdetect -y 1
```

As shown in the following illustration, the address of two PCA9685 chips are 0x40 and 0x41 respectively, the address of ADS7830 chip is 0x48 and the address of MPU6050 module is 0x68.

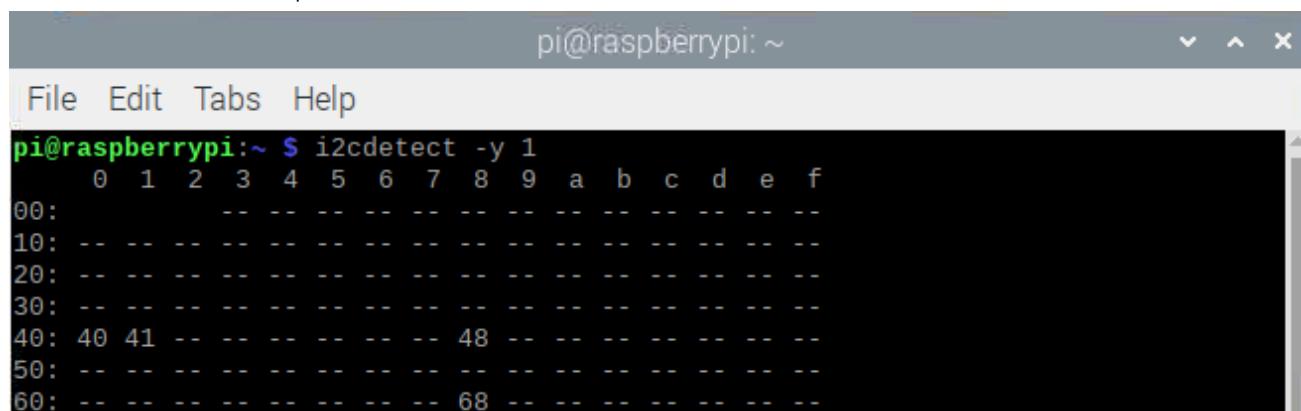

```
pi@raspberrypi:~ $ i2cdetect -y 1
      0  1  2  3  4  5  6  7  8  9  a  b  c  d  e  f
00: --
10: --
20: --
30: --
40: 40 41 -- -- -- -- 48 --
50: --
60: -- -- -- -- -- 68 --
```

Run program

Enter following commands in the terminal to test servos.

If the terminal displays the directory as below (where test.py is located). You can directly execute the test.py command.

```
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

1. If not, execute the cd command:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2. Execute test.py command:


```
sudo python test.py Servo
```

```
pi@raspberrypi: ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server ~ ^ x
File Edit Tabs Help
pi@raspberrypi:~ $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python test.py Servo
Program is starting ...
```

Result:

In the previous chapter, we have assembled the robot and executed the servo installation program, which makes the six legs of the robot straight.

After running the servo test program, the robot slowly rotates its six legs clockwise from the original straight state, and then lifts the legs up, and finally stands with the lower leg extended back. If the sequence of the movement of your robot is different, please check whether the wiring is correct.

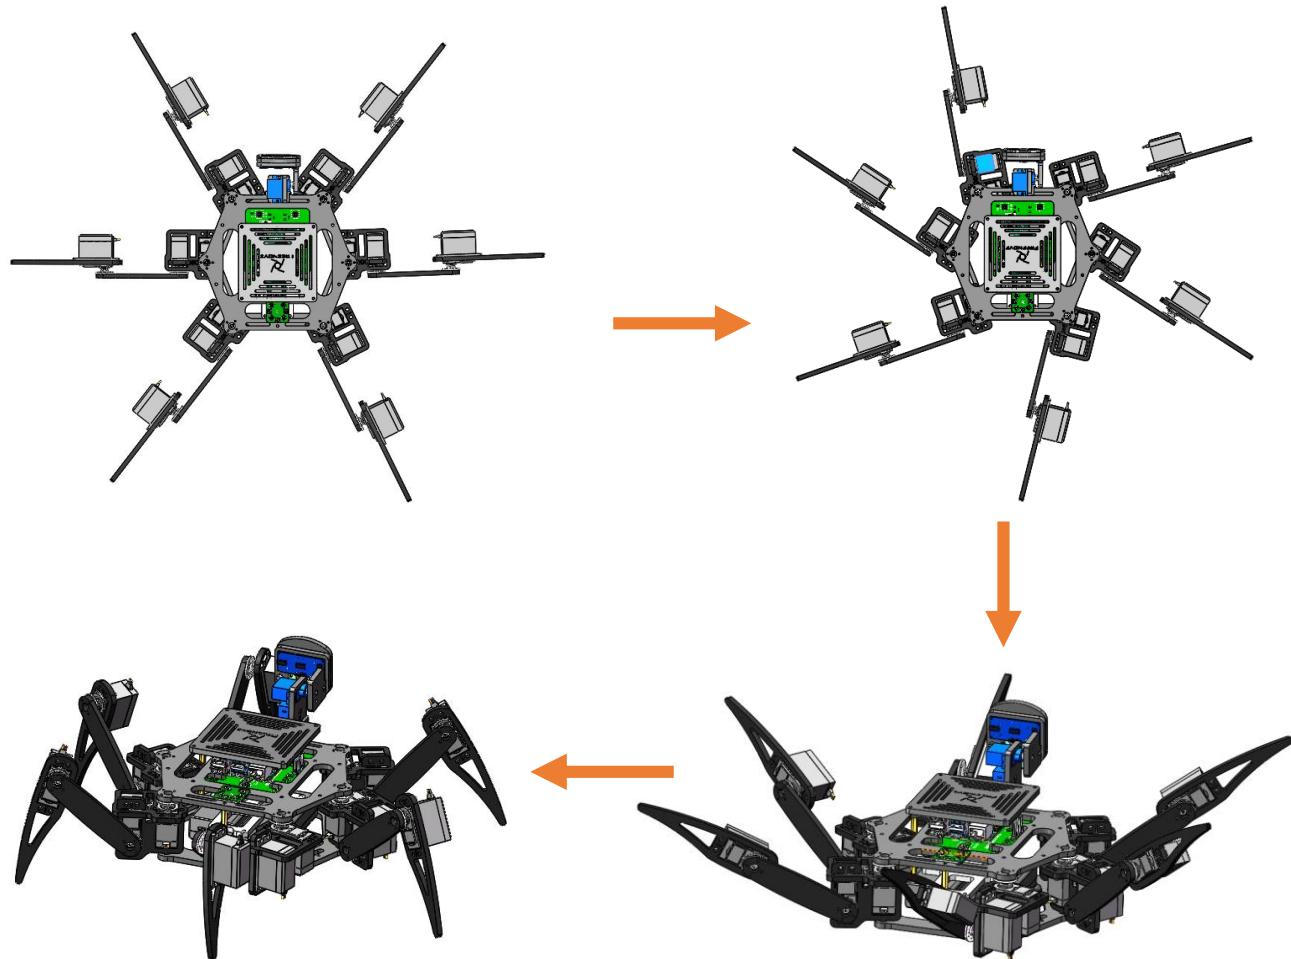

The code is as below:

```
1  from Servo import *
2  servo=Servo()
3  def test_Servo():
4      try:
5          for i in range(50):
6              servo.setServoAngle(15, 90+i)
7              servo.setServoAngle(12, 90+i)
8              servo.setServoAngle(9, 90+i)
9              servo.setServoAngle(16, 90+i)
10             servo.setServoAngle(19, 90+i)
11             servo.setServoAngle(22, 90+i)
12             time.sleep(0.05)
13         for i in range(60):
14             servo.setServoAngle(14, 90+i)
15             servo.setServoAngle(11, 90+i)
16             servo.setServoAngle(8, 90+i)
17             servo.setServoAngle(17, 90-i)
18             servo.setServoAngle(20, 90-i)
19             servo.setServoAngle(23, 90-i)
20             time.sleep(0.05)
21         for i in range(150):
22             servo.setServoAngle(13, i)
23             servo.setServoAngle(10, i)
24             servo.setServoAngle(31, i)
25             servo.setServoAngle(18, 180-i)
26             servo.setServoAngle(21, 180-i)
27             servo.setServoAngle(27, 180-i)
28             time.sleep(0.05)
29         print ("\nEnd of program")
30     except KeyboardInterrupt:
31         print ("\nEnd of program")
```

Reference

setServoAngle(channel, angle)

There are two parameters in this function to rotate the servo of specified channel to a specified angle.

The first parameter indicates the servo channel

The second parameter indicates the rotation angle

For example:

setServoAngle(0,60) Rotate servo of channel 0 to 60 degrees

setServoAngle(15,160) Rotate servo of channel 15 to 160 degrees

ADC Module

Run program

Enter following commands to test ADC module.

If the terminal displays the directory as below (where test.py is located). You can **directly** execute the test.py command.


```
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

1.If not, execute the cd command:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2.Execute test.py command:

```
sudo python test.py ADC
```

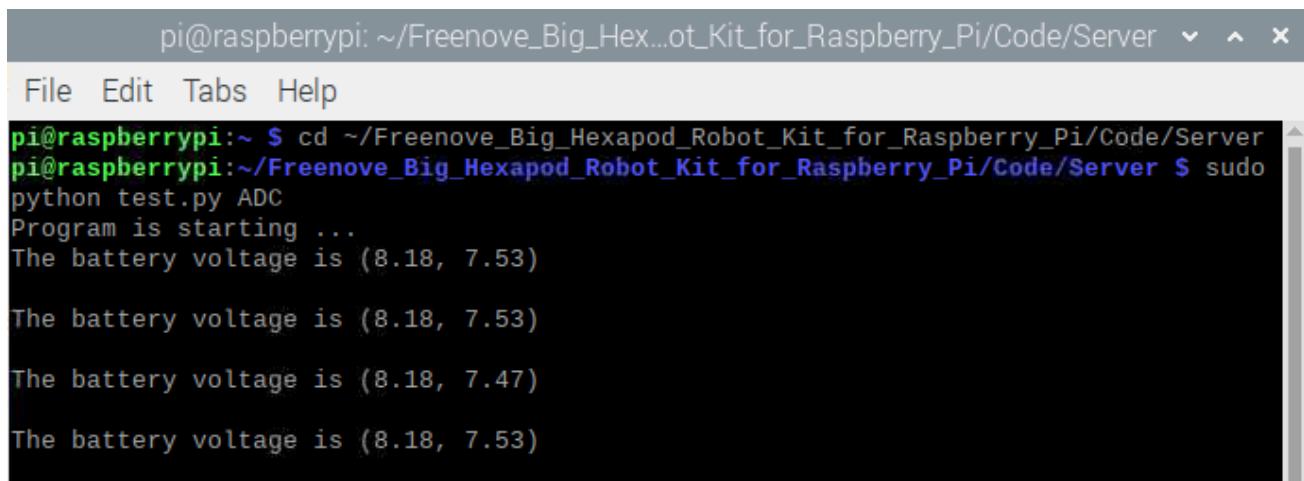

```
pi@raspberrypi: ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server ~ ^ x
File Edit Tabs Help
pi@raspberrypi:~ $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python test.py ADC
Program is starting ...
The battery voltage is (8.18, 7.53)
The battery voltage is (8.18, 7.53)
The battery voltage is (8.18, 7.47)
The battery voltage is (8.18, 7.53)
```

Result:

Print out the voltage value of two sets of batteries every one second,You can press "Ctrl + C" to end program.

The code is as below:

```
1 from ADS7830 import *
2 adc=ADS7830()
3 def test_Adc():
4     try:
5         while True:
6             Power=adc.batteryPower()
7             print ("The battery voltage is "+str(Power)+"\n")
8             time.sleep(1)
9     except KeyboardInterrupt:
10        print ("\nEnd of program")
```

Reference

batteryPower()

Return the voltage value of the battery, retaining two decimal places.

Ultrasonic module

Run program

Enter the following command in the terminal to test the ultrasonic module:

If the terminal displays the directory as below (where test.py is located). You can **directly** execute the test.py command.

```
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

1. If not, execute the cd command:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2. Execute test.py command:

```
sudo python test.py Ultrasonic
```

```
pi@raspberrypi:~ $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python test.py Ultrasonic
Program is starting ...
Obstacle distance is 32CM
Obstacle distance is 32CM
Obstacle distance is 9CM
Obstacle distance is 15CM
Obstacle distance is 14CM
Obstacle distance is 7CM
Obstacle distance is 31CM
^C
End of program
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

Result:

Every 1s, the distance between the obstacle and the ultrasonic module will be printed in, and you can press "Ctrl + C" to end the program.

The code is as below:

```
1 from Ultrasonic import *
2 ultrasonic=Ultrasonic()
3 def test_Ultrasonic():
4     try:
5         while True:
6             data=ultrasonic.getDistance()    #Get the value
7             print ("Obstacle distance is "+str(data)+"CM")
8             time.sleep(1)
9         except KeyboardInterrupt:
10             print ("\nEnd of program")
```

Reference


`getDistance()`

This function is used to obtain the distance of ultrasonic module and front obstacle, with unit CM.

Led

Note: Raspberry PI 5 is temporarily unavailable because the Library rpi-ws281x-python does not support Raspberry PI 5. Please skip this section.

There is an LED module on the robot, as shown below:



Run program

Enter the following commands to test LED.

If the terminal displays the directory as below (where test.py is located). You can **directly** execute the test.py command.

```
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```


1.If not, execute the cd command:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2.Execute test.py command:


```
sudo python test.py Led
```

If you are using the Led feature for the first time, it will ask for the PCB version of the connection board.

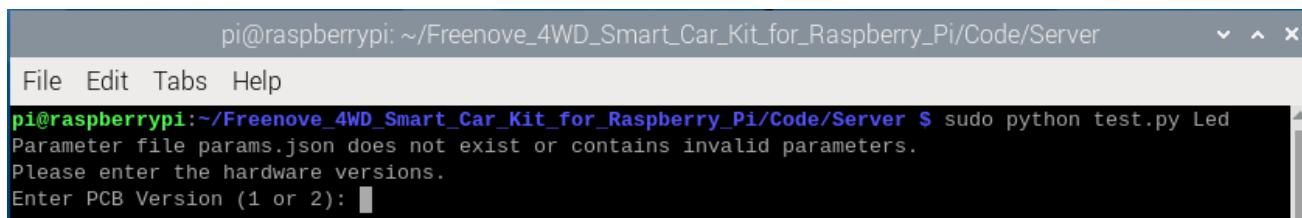

```
pi@raspberrypi: ~/Freenove_4WD_Smart_Car_Kit_for_Raspberry_Pi/Code/Server
File Edit Tabs Help
pi@raspberrypi:~/Freenove_4WD_Smart_Car_Kit_for_Raspberry_Pi/Code/Server $ sudo python test.py Led
Parameter file params.json does not exist or contains invalid parameters.
Please enter the hardware versions.
Enter PCB Version (1 or 2):
```

Please enter 1 or 2 according to the version number of your connection board.

Connection board (PCB_V1.0)	Connection board (PCB_V2.0)
	 Not yet available for sale, See here for more information.

```
pi@raspberrypi: ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server ~ ^ x
File Edit Tabs Help
pi@raspberrypi:~ $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python test.py Led
Program is starting ...

Red wipe
Green wipe
Blue wipe
White wipe

End of program
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

If your connection board version is V2.0 and you do not have the SPI feature turned on, the LedPixel will not show the color. Refer [here](#) to turn on the SPI

Result:

The LED lights up with the color of red, green, blue and white in turn and then it turns OFF. You can end the program ahead of time by pressing "ctrl+c".

If the LED color display order is not correct, open the "**Led.py**" file in the current directory and modify the value of the "self.ORDER" variable on line 16.

The code of test.py is as below:

```
1  from Led import *
2  led=Led()
3  def test_Led():
4      try:
5          #Red wipe
6          led.colorWipe([255, 0, 0])
7          time.sleep(1)
8          print ("\nRed wipe")
9
10         #Green wipe
11         led.colorWipe([0, 255, 0])
12         time.sleep(1)
13         print ("\nGreen wipe")
14
15         #Blue wipe
16         led.colorWipe([0, 0, 255])
17         time.sleep(1)
18         print ("\nBlue wipe")
19
20         #White wipe
21         led.colorWipe([255, 255, 255])
22         time.sleep(1)
23         print ("\nWhite wipe")
24
25         led.colorWipe([0, 0, 0])    #turn off the light
26         print ("\nEnd of program")
27     except KeyboardInterrupt:
28         led.colorWipe([0, 0, 0])    #turn off the light
29         print ("\nEnd of program")
```

Reference

colorWipe(color, wait_ms)

This function erases the color of one pixel at a time, has two input parameters, color represents the color to be erased, and wait_ms represents the erasure interval. The default is 50ms. For example, colorWipe([255,0,0],20) means that the LED0 color is red first, wait for 20ms, and then the LED1 color is also red, so that all eight LEDs are lit and red.

Buzzer

Run the program

Enter following command in the terminal to test buzzer.

If the terminal displays the directory as below (where test.py is located). You can **directly** execute the test.py command.


```
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

1.If not, execute the cd command:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2.Execute test.py command:

```
sudo python test.py Buzzer
```

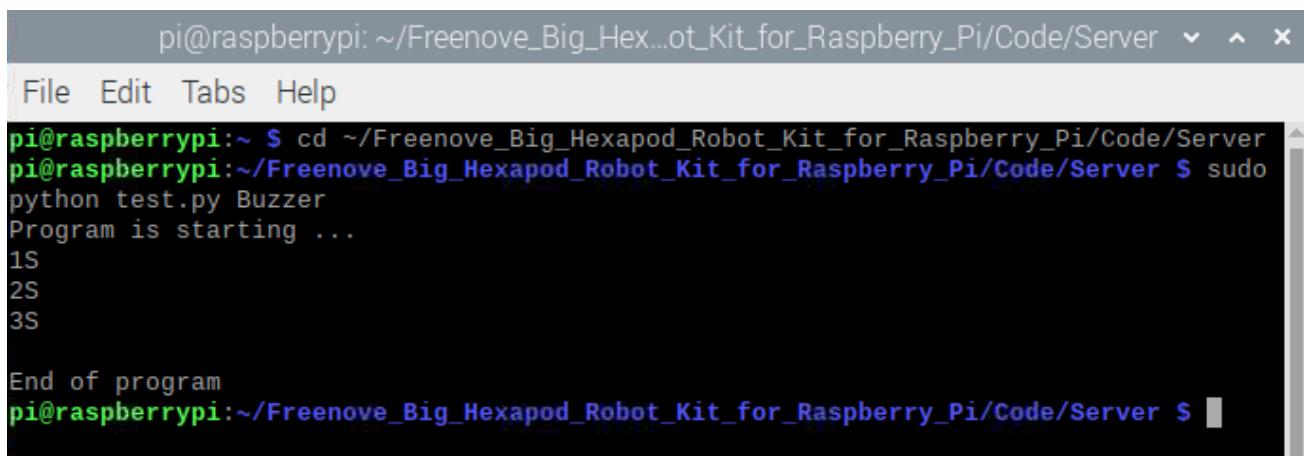

The screenshot shows a terminal window with the following content:

```
pi@raspberrypi: ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python test.py Buzzer
Program is starting ...
1S
2S
3S

End of program
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $
```

Result:

The buzzer will be turn on lasting for 3s. Then the program will automatically end or you can press "Ctrl + C" to end the program.

The code is as below:

```
1  from Buzzer import *
2  buzzer=Buzzer()
3  def test_Buzzer():
4      try:
5          buzzer.run('1')
6          time.sleep(1)
7          print ("1S")
8          time.sleep(1)
9          print ("2S")
10         time.sleep(1)
11         print ("3S")
12         buzzer.run('0')
13         print ("\nEnd of program")
14     except KeyboardInterrupt:
15         buzzer.run('0')
16         print ("\nEnd of program")
```

Reference

buzzer.run(cmd)

This function has one input parameter. If the input is '1', the buzzer will be turned on. If the input is '0', the buzzer will be turned off.

Camera

There are two ways to drive the camera.

First method, use the system's default camera detection function.

1. Open the config.txt file.

```
sudo nano /boot/firmware/config.txt
```

2. Enable the automatic camera detection function.

```
camera_auto_detect=1
```

Second method, manually configure the camera.

1. Disable the automatic camera detection function.

```
camera_auto_detect=0
```

2. Add the following instruction at the very bottom.

If you are a Raspberry PI 5, add the following command.

```
dtoverlay = ov5647,cam0
```

If you are not a Raspberry PI 5, add the following command.

```
dtoverlay = ov5647
```

3. Save the file and exit, then restart the Raspberry PI.

Run program

1. execute the cd command:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2. Execute test.py command:

```
python camera.py
```


Then please open and check the generated image.jpg under

/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server.

```
[0:43:46.576778300] [2970] INFO RPI pisp.cpp:1450 Sensor: /base/axi/pcie@120000/rp1/i2c@88000/ov5647@36 - Selected sensor format: 640x480-SGBRG10_1X10 - Selected CFE format: 640x480-PC1g
QStandardPaths: wrong permissions on runtime directory /run/user/1000, 0770 instead of 0700
[0:43:48.531984920] [2974] WARN V4L2 v4l2_pixelformat.cpp:344 Unsupported V4L2 pixel format RPBP
[0:43:48.532711766] [2974] INFO Camera camera.cpp:1183 configuring streams: (0) 2592x1944-BGR888 (1) 2592x1944-GBRG_PISP_COMP1
[0:43:48.536032796] [2970] INFO RPI pisp.cpp:1450 Sensor: /base/axi/pcie@120000/rp1/i2c@88000/ov5647@36 - Selected sensor format: 2592x1944-SGBRG10_1X10 - Selected CFE format: 2592x1944-PC1g
[0:43:48.945554937] [2974] WARN V4L2 v4l2_pixelformat.cpp:344 Unsupported V4L2 pixel format RPBP
[0:43:48.946127747] [2974] INFO Camera camera.cpp:1183 configuring streams: (0) 640x480-XBGR8888 (1) 640x480-GBRG_PISP_COMP1
[0:43:48.949655072] [2970] INFO RPI pisp.cpp:1450 Sensor: /base/axi/pcie@120000/rp1/i2c@88000/ov5647@36 - Selected sensor format: 640x480-SGBRG10_1X10 - Selected CFE format: 640x480-PC1g
```

Then please open and check the generated image.jpg under

/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server.

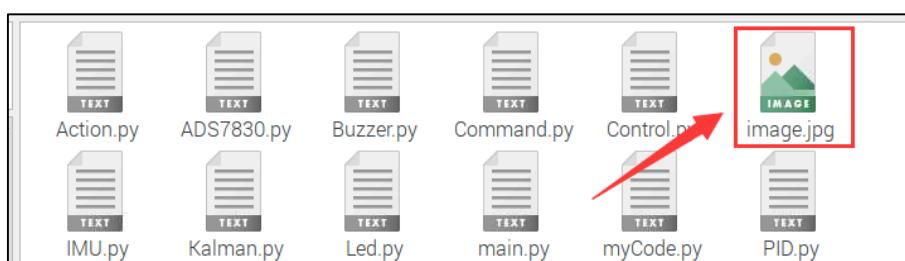

Chapter 4 Hexapod Robot


You can refer to these videos to open client and calibrate the robot:

Client control: <https://youtu.be/KlxxgnW6uyo>

Calibration: <https://youtu.be/NdXG3wmdufI>

The robot features with live video, ultrasonic ranging and other functions. Based on Python3 and PyQt5, it has also been built with server and client, which communicate with each other through TCP/IP protocol and can be controlled remotely with the same LAN.

We will help you with any concerns via support@freenove.com

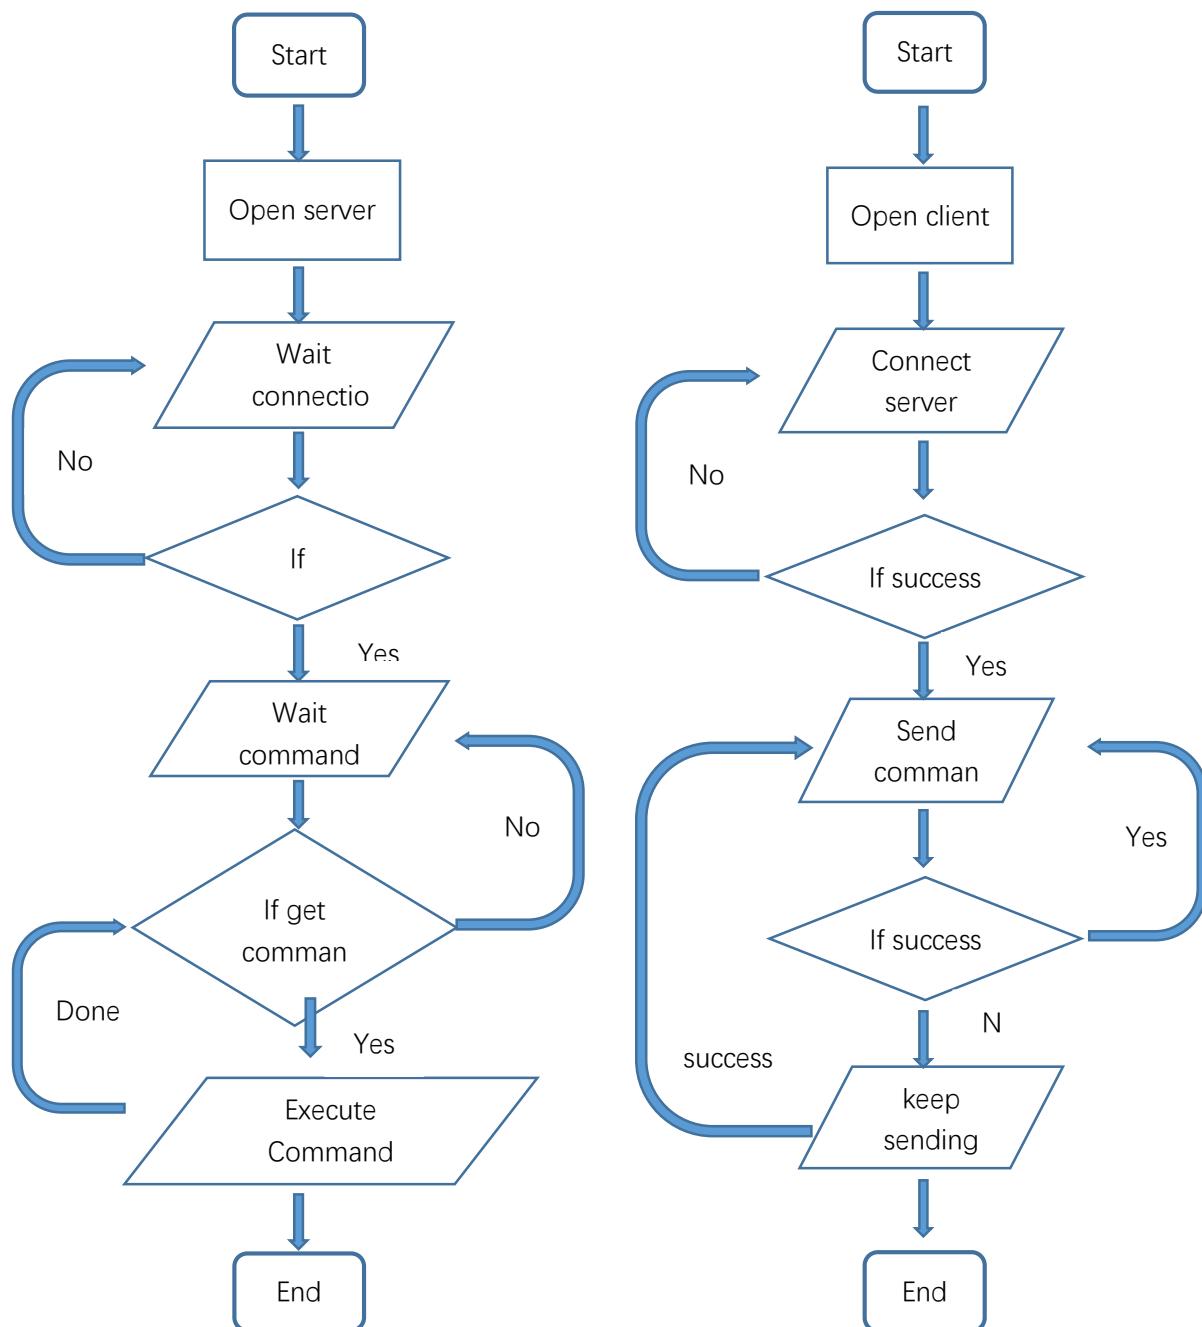

Server

The server runs on the Raspberry Pi. It sends the camera data and ultrasonic module data to the client, and receive commands from client.

The code in the Server folder is used as an example.

Part of the server code is as follows:

```

1  def get_interface_ip(self):
2      s = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)
3      return socket.inet_ntoa(fcntl.ioctl(s.fileno(),
4                                         0x8915,
5                                         struct.pack('256s', b'wlan0')[:15])
6                                         )[20:24])
7
8  def turn_on_server(self):
9      #ip address
10     HOST=self.get_interface_ip()
11     #Port 8002 for video transmission
12     self.server_socket = socket.socket()
13     self.server_socket.setsockopt(socket.SOL_SOCKET,socket.SO_REUSEPORT,1)
14     self.server_socket.bind((HOST, 8002))
15     self.server_socket.listen(1)
16     #Port 5002 is used for instruction sending and receiving
17     self.server_socket1 = socket.socket()
18     self.server_socket1.setsockopt(socket.SOL_SOCKET,socket.SO_REUSEPORT,1)
19     self.server_socket1.bind((HOST, 5002))
20     self.server_socket1.listen(1)
21     print('Server address: '+HOST)
22
23  def turn_off_server(self):
24      try:
25          self.connection.close()
26          self.connection1.close()
27      except :
28          print ('\n'+ "No client connection")
29
30  def reset_server(self):
31      self.turn_off_server()
32      self.turn_on_server()
33      self.video=threading.Thread(target=self.transmission_video)
34      self.instruction=threading.Thread(target=self.receive_instruction)
35      self.video.start()
36      self.instruction.start()
```

Reference

For more code, please check "Server.py" in the Server directory.

get_interface_ip()	To obtain the IP address of RPi's WLAN0
turn_on_server()	To turn ON TCP to wait for the connection of Client
turn_off_server()	To turn OFF TCP
send_data()	To send commands to client
reset_server()	To restart TCP
transmission_video()	To send video data to client
receive_instruction()	To receive commands from client

Open Server


Step 1 Login Raspberry Pi via VNC viewer

Because server and client use GUI. You need use VNC viewer as remote desktop way.

Download and install VNC Viewer according to your computer system by clicking following link:


<https://www.realvnc.com/en/connect/download/viewer/>


After installation is completed, open VNC Viewer. And click File → New Connection. Then the interface is shown below.

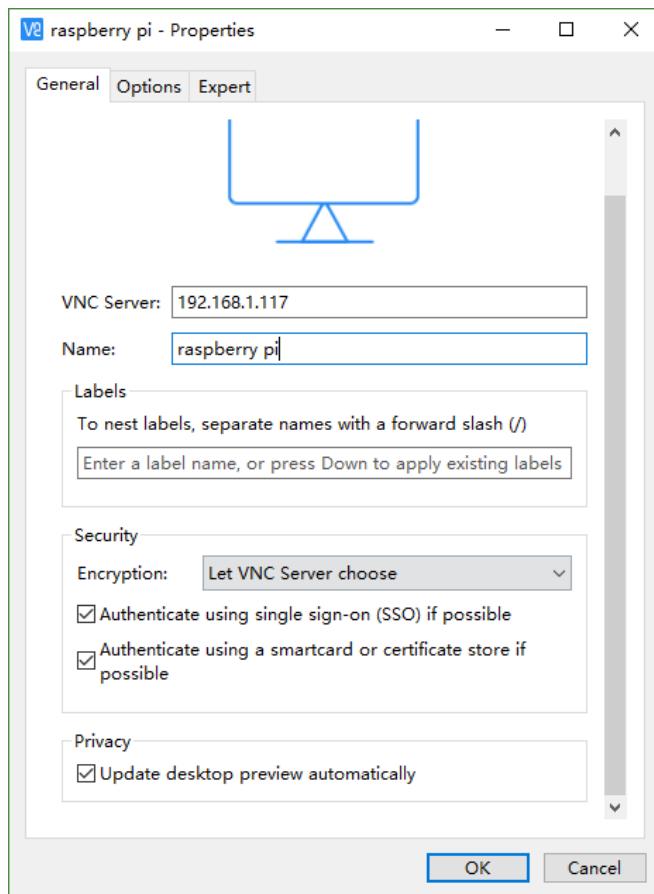

Enter IP address of your Raspberry Pi and fill in a Name. And click OK.


Then on the VNC Viewer panel, double-click new connection you just created, and the following dialog box pops up. Enter username: **pi** and Password: **raspberry**. And click OK.

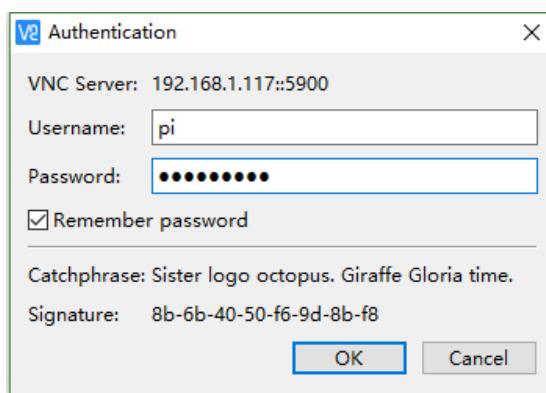

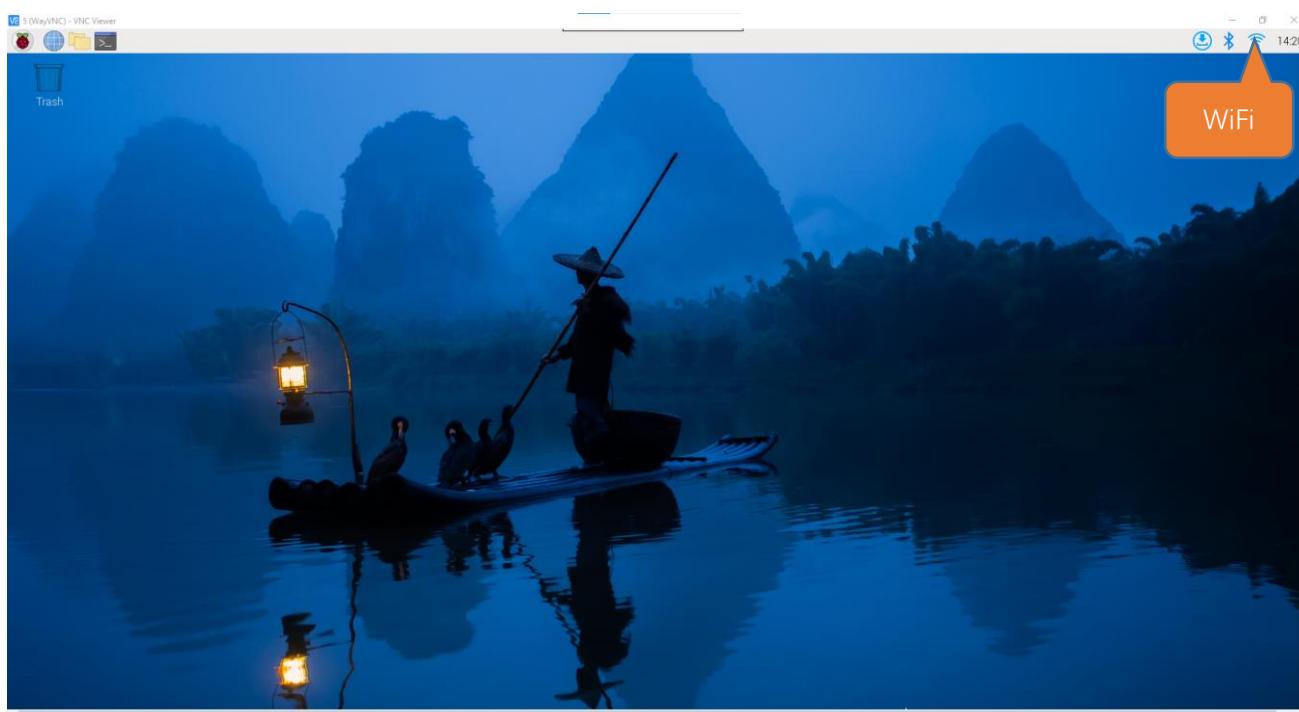

If the resolution ratio is not great or there is just a **little window**, you can set a proper resolution ratio via steps below.

Select Screen Configuration. Select the appropriate resolution in the new window. Click Apply.

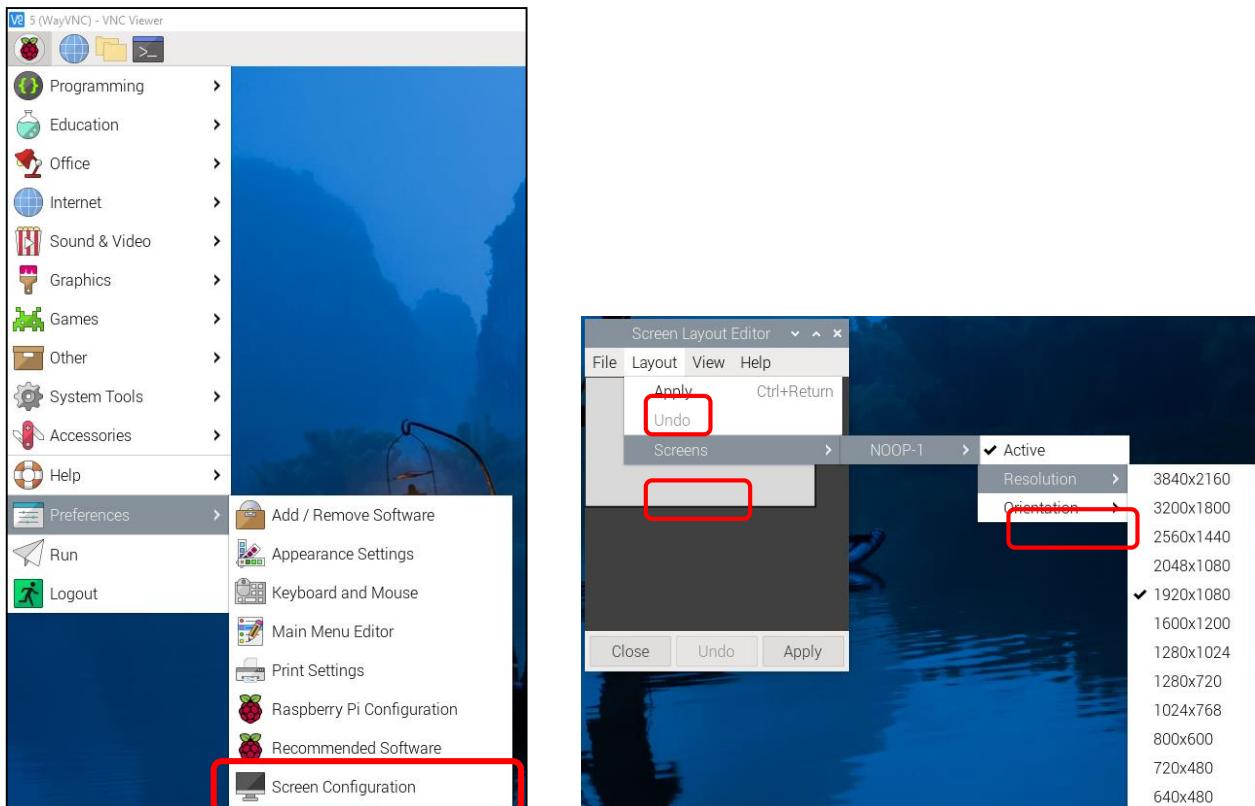

In addition, your VNC Viewer window may zoom your Raspberry Pi desktop. You can change it. On your VNC View control panel, click right key. And select Properties->Options label->Scaling. Then set proper scaling.

support@freenove.com

Step 2 Run commands


Enter following command in the terminal.

1. Use cd command to enter directory where main.py is located:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```


2. Run main.py:

```
sudo python main.py
```

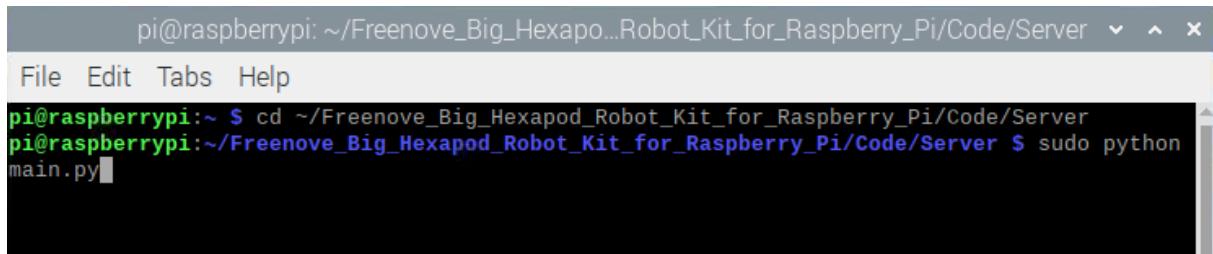

A screenshot of a terminal window titled "pi@raspberrypi: ~". The window shows the command line interface with the following text:
File Edit Tabs Help
pi@raspberrypi:~ \$ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server \$ sudo python
main.py

The interface is as below:

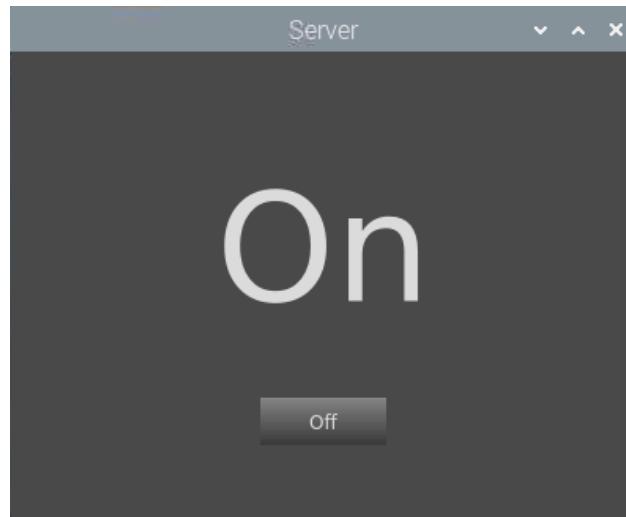

If you don't like the interface, you can also enter the commands to open the server. It is more convenient.

1. Use cd command to enter directory where main.py is located:

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

2. Run main.py:

```
sudo python main.py -t -n
```

or Run main.py with following command:

```
sudo python main.py -tn
```

"-t" means open TCP communication. "-n" means don't show interface.

Server Auto Start

- 1 Open the terminal and execute the following two commands respectively to create a "start.sh" file.

```
cd ~
sudo touch start.sh
```

- 2 Open "start.sh".

```
sudo nano start.sh
```

- 3 Add the following contents to "start.sh" file.

```
#!/bin/sh
cd "/home/pi/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server"
pwd
sleep 10
sudo cp point.txt /home/pi
sudo python main.py
```

Press Ctrl + O and then press Enter to save it. Press Ctrl+X to exit.

```
pi@raspberrypi: ~
File Edit Tabs Help
GNU nano 3.2          start.sh
#!/bin/sh
cd "/home/pi/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server"
pwd
sudo cp point.txt /home/pi
sudo python main.py

[ Read 6 lines ]
^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos
^X Exit      ^R Read File  ^\ Replace   ^U Uncut Text ^T To Spell ^_ Go To Line
```

- 4 Modify permissions.

```
sudo chmod 777 start.sh
```

- 5 Enter the following command to create a directory.

```
mkdir ~/.config/autostart/
```

- 6 create and open "start.desktop" file

```
sudo nano .config/autostart/start.desktop
```

7 Add the following content to “start.desktop” file.

```
[Desktop Entry]
Type=Application
Name=start
NoDisplay=true
Exec=/home/pi/start.sh
```

Press Ctrl + O and then press Enter to save it. Press Ctrl+X to exit.

The screenshot shows a terminal window titled "pi@raspberrypi: ~". The menu bar includes "File", "Edit", "Tabs", and "Help". The title bar shows "GNU nano 3.2 .config/autostart/start.desktop". The main area of the terminal displays the following text:

```
[Desktop Entry]
Type=Application
Name=start
NoDisplay=true
Exec=/home/pi/start.sh
```

At the bottom of the terminal window, there is a status bar with the following options:

```
[ Read 6 lines ]
^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos
^X Exit ^R Read File ^V Replace ^U Uncut Text ^T To Spell ^_ Go To Line
```

8 Modify permissions.

```
sudo chmod +x .config/autostart/start.desktop
```

9 Finally enter the following content to reboot Raspberry Pi.

```
sudo reboot
```

Note: To cancel auto start, please delete the files “start.sh” and “start.desktop” created above.

Client

Client can receive video data and commands from the server as well as send commands to server. It can also be run in different systems including Windows and macOS as long as you install the related software and libraries.

Part of the client code is as follows:

```
1  def turn_on_client(self, ip):
2      self.client_socket1 = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
3      self.client_socket = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
4      print (ip)
5  def turn_off_client(self):
6      try:
7          self.client_socket.shutdown(2)
8          self.client_socket1.shutdown(2)
9          self.client_socket.close()
10         self.client_socket1.close()
11     except Exception as e:
12         print(e)
13  def receiving_video(self, ip):
14      try:
15          self.client_socket.connect((ip, 8002))
16          self.connection = self.client_socket.makefile('rb')
17      except:
18          #print ("command port connect failed")
19          pass
20      while True:
21          try:
22              stream_bytes= self.connection.read(4)
23              leng=struct.unpack('<L', stream_bytes[:4])
24              jpg=self.connection.read(leng[0])
25              if self.is_valid_image_4_bytes(jpg):
26                  if self.video_flag:
27                      self.image = cv2.imdecode(np.frombuffer(jpg, dtype=np.uint8),
28 cv2.IMREAD_COLOR)
29                      if self.face_id == False and self.face_recognition_flag:
30                          self.face.face_detect(self.image)
31                          self.video_flag=False
32          except BaseException as e:
33              print (e)
34              break
35  def send_data(self,data):
36      if self.tcp_flag:
```

```
37     try:  
38         self.client_socket1.send(data.encode('utf-8'))  
39     except Exception as e:  
40         print(e)  
41     def receive_data(self):  
42         data=""  
43         data=self.client_socket1.recv(1024).decode('utf-8')  
44         return data
```

Reference

For more code, please check "Client.py" in the Client director.

turn_on_client ()

To connect to the server

turn_off_client ()

To disconnect server。

receiving_video()

To receive video data from server

is_valid_image_4_bytes ()

To check the integrity of each frame of video data

send_data ()

To send commands to server

receive_data ()


To receive commands from server

Run Client on Windows system


There are two ways to run Client on Windows.

1. Running executable file directly

Find the “Client.exe” file in the specified directory, double click it and the Client is opened.

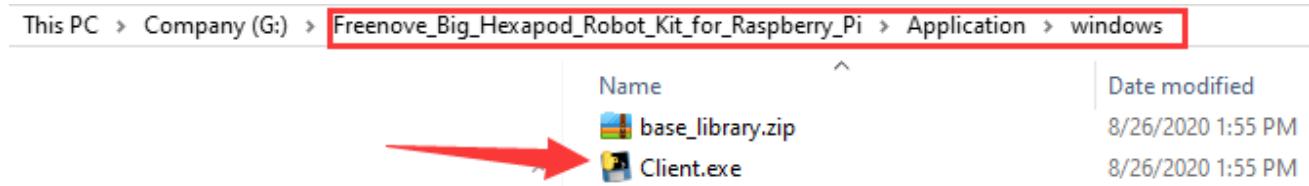

The client interface is shown as below:

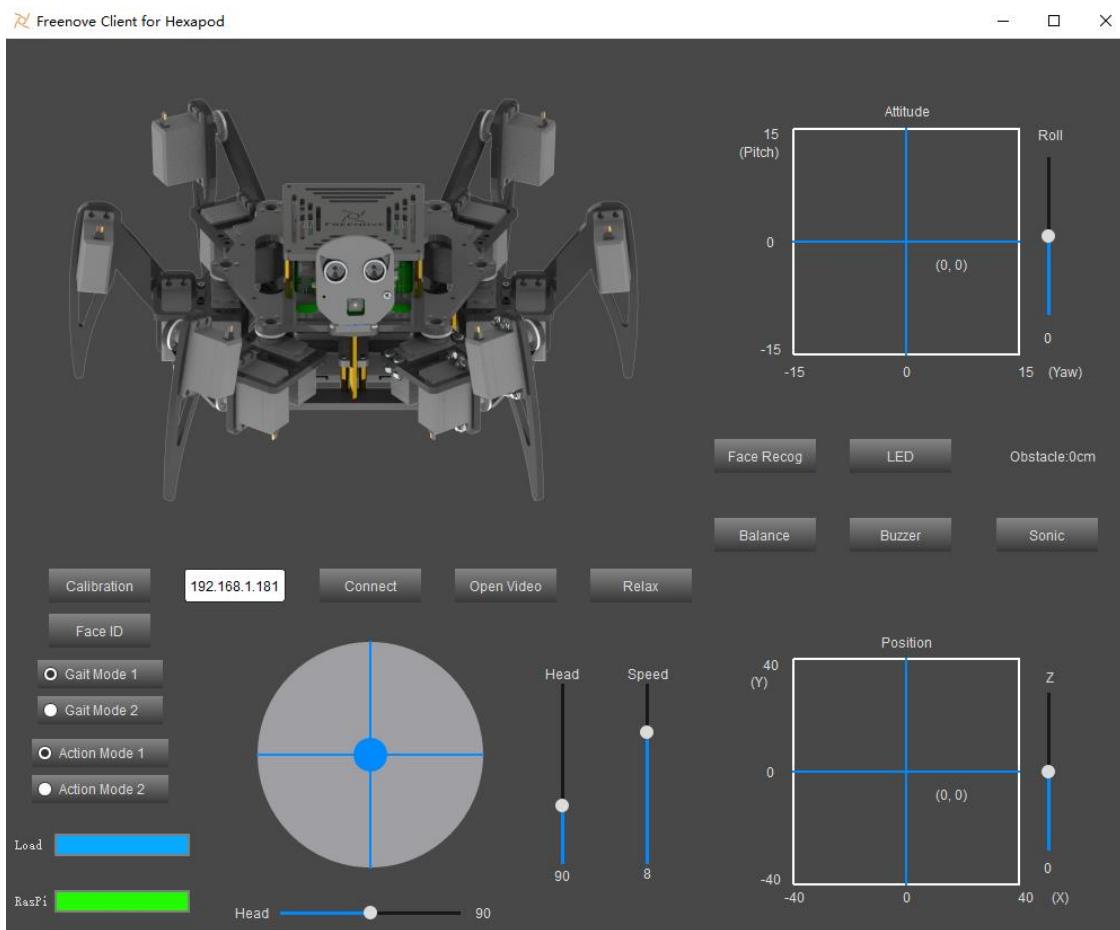

When the Client is opened successfully, you need to turn on Raspberry Pi and open the server. Enter Raspberry Pi's IP address in the white IP editor and click “Connect” to connect the robot with RPi. After connecting successfully, you need to calibrate the robot's six legs before control it to move.

Note: when Raspberry Pi is shut down, server will be closed. You need open server again the next time.

2. Install python3 and some related python libraries and execute the program through python3 editor.

This section will be completed in your **computer with windows system, not Raspberry Pi**.

Running client on Windows system requires the installation of some software and libraries, which take some time. At this point, it does not require to run server and use the Raspberry Pi, so you can turn OFF RPi temporarily. After installing successfully, turn ON the RPi and run the Server.

Install python3

Download the installation file via below:

<https://www.python.org/downloads/windows/>

The screenshot shows the Python Downloads for Windows page. At the top, there are three blue buttons: 'About', 'Downloads' (which is highlighted), and 'Documentation'. Below the buttons, the text 'Python >> Downloads >> Windows' is displayed. The main title 'Python Releases for Windows' is centered above a list of two items:

- [Latest Python 3 Release - Python 3.8.1](#)
- [Latest Python 2 Release - Python 2.7.17](#)


Click Latest Python Release - Python 3.8.1

Version	Operating System	Description
Gzipped source tarball	Source release	
XZ compressed source tarball	Source release	
macOS 64-bit installer	Mac OS X	for OS X 10.9 and later
Windows help file	Windows	
Windows x86-64 embeddable zip file	Windows	for AMD64/EM64T/x64
Windows x86-64 executable installer	Windows	for AMD64/EM64T/x64
Windows x86-64 web-based installer	Windows	for AMD64/EM64T/x64
Windows x86 embeddable zip file	Windows	
Windows x86 executable installer	Windows	
Windows x86 web-based installer	Windows	

Select "Windows x86 executable installer". Execute the installer when completes downloading..




Check "Add Python 3.8 to PATH" and install according to your needs.

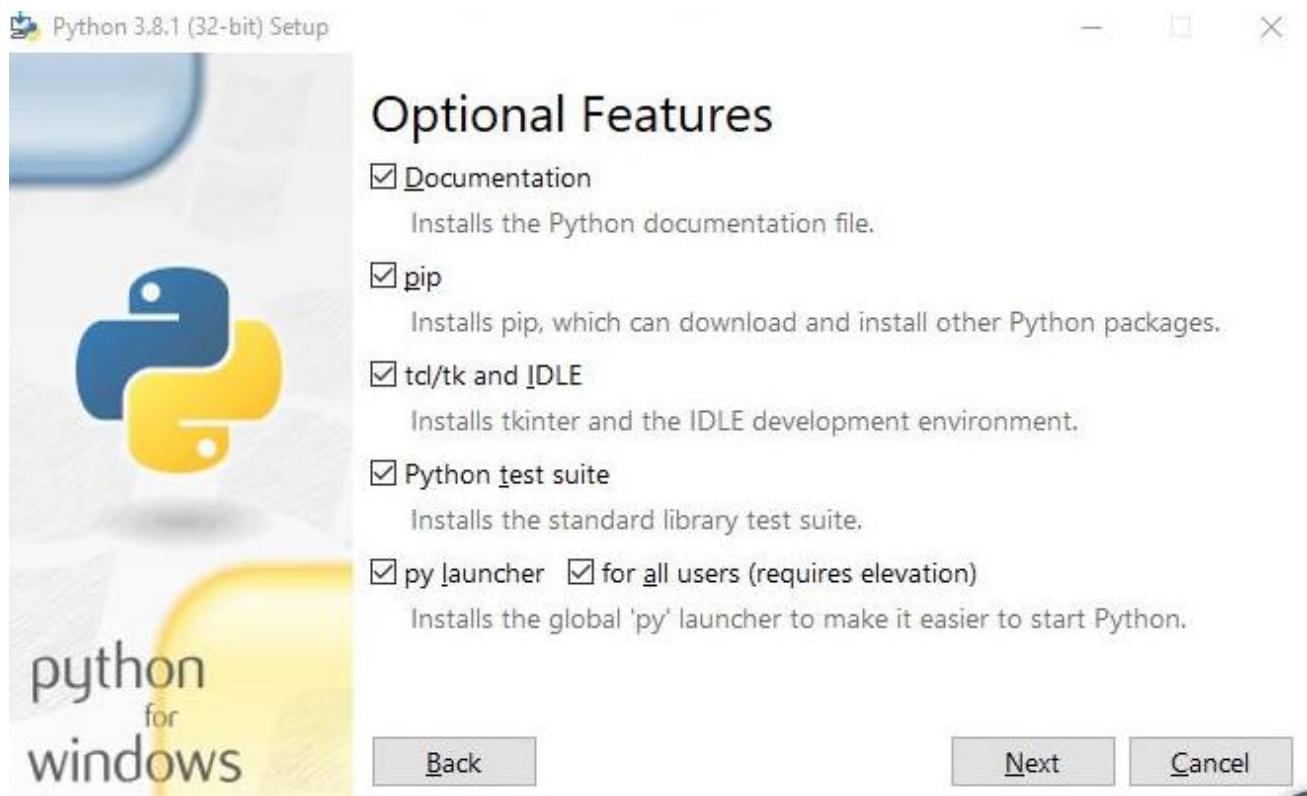


Check all the options and click "Next".

support@freenove.com

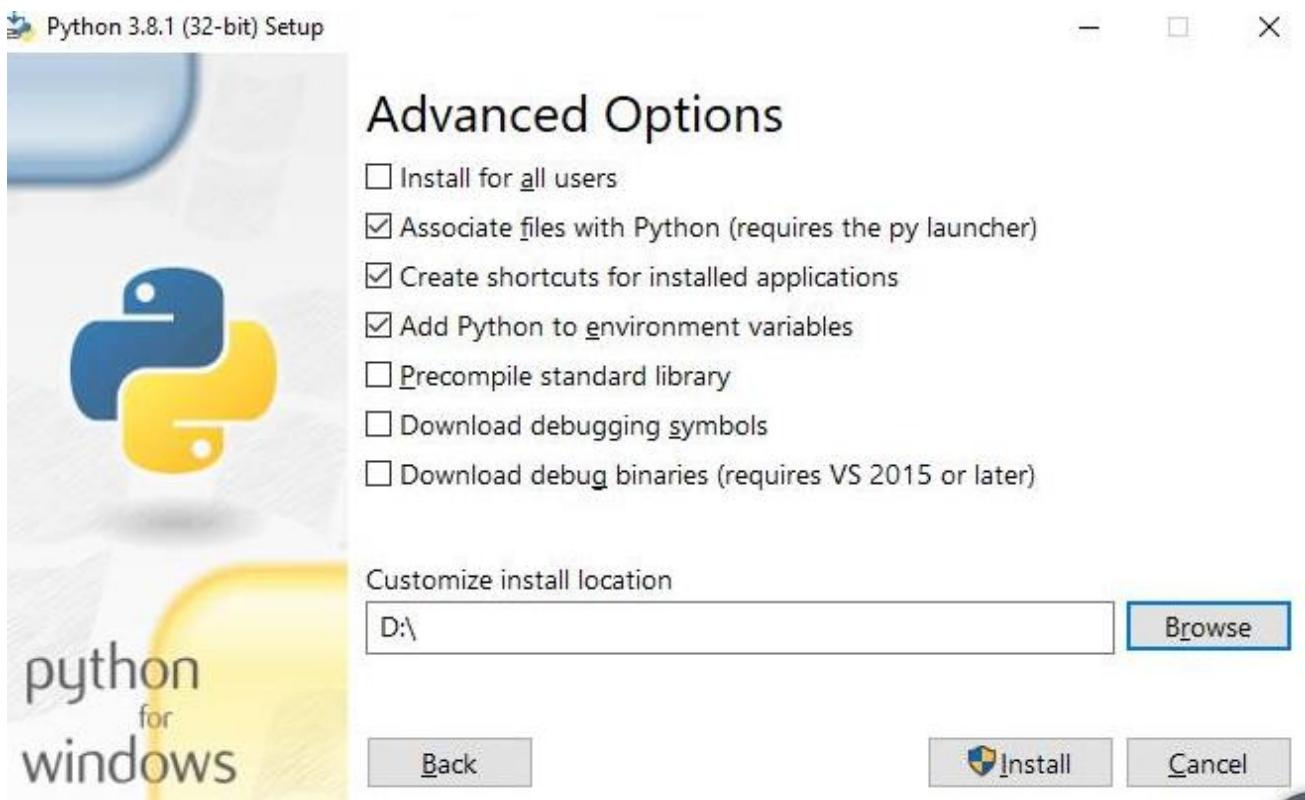

My installation path here is Disk D (You can choose whichever you prefer). Click Install.

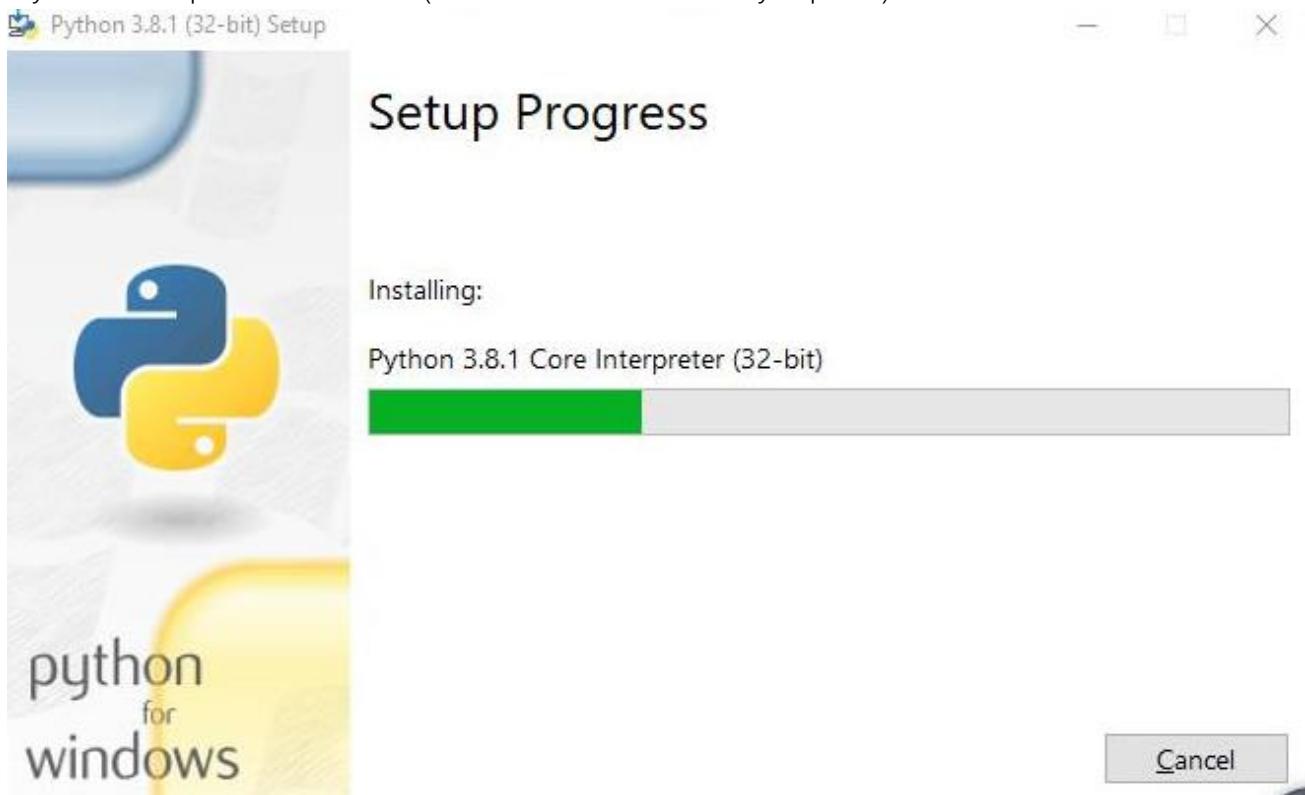

Wait for the installation,



Installation finishes.

Install libraries including PyQt5 library, opencv library, numpy library, etc.

If have not download the zip file, download it via below:

https://github.com/Freenove/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/archive/master.zip

Then unzip it and delete “-master” to rename it to “Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi”.

Then put it into D disk for example.

You can also place it into other disks (like E), but the path in following command should be modified accordingly (replace D: by E:).

Press “win + R” and enter cmd, and click ok. Then enter following commands.

1.Enter D disk. If you put it into E, it should be E:

D:

2.Enter directory where setup_windows.py is located:

cd D:\Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code

3.Run: setup_windows.py

Python setup_windows.py

```
C:\Users\Freenove>D:  
D:\>cd D:\Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code  
D:\Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code>Python setup_windows.py
```

Or you can enter “Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code\” directory and double click “setup_windows.py” to execute the installer.

Or open “setup_windows.py” with python3 and execute it.

Caution: If the default python of your Windows system is not python3 but python2, change the command “setup_windows.py” as follows and replace all “python” in setup_windows.py to “python3”.

Python3 setup_windows.py

The installation takes some time, please wait with patience. When all the libraries are installed successfully, you can see the prompt “All libraries installed successfully” on the screen.

Package	Version
click	7.1.2
numpy	1.18.5
opencv-contrib-python	4.3.0.36
opencv-python	4.3.0.36
Pillow	7.1.2
pip	20.2.1
PyInstaller	3.6
PyQt5	5.15.0
PyQt5-sip	12.8.0
pyqt5-tools	5.15.0.1.7
python-dotenv	0.14.0
setuptools	41.2.0

All libraries installed successfully

If there is any library fails to install, it will print “Some libraries have not been installed yet. Please run 'python setup_windows.py' again” on the screen, then you need to execute the command python setup_windows.py again. Most installation fails because of poor network, so you can check your network before installing the libraries.

Open client

Press "win + R" and enter cmd, and click ok. Then enter following commands.

1.Enter D disk. If you put it into E, it should be E:

D:

2.Enter directory where Main.py is located:

```
cd D:\Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code\Client
```

3.Run Main.py:

Python Main.py

```
C:\Users\Freenove>D:  
D:\>cd D:\Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code\Client  
D:\Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code\Client>Python Main.py
```


Or you can enter "Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi\Code\Client" directory and double-click "Main.py".

Or use python3 to open and execute "Main.py".

Note: If the default python of your Windows system is not Python3 but python2, change the command Main.py as follows:

Python3 Main.py

The client interface is shown as below:

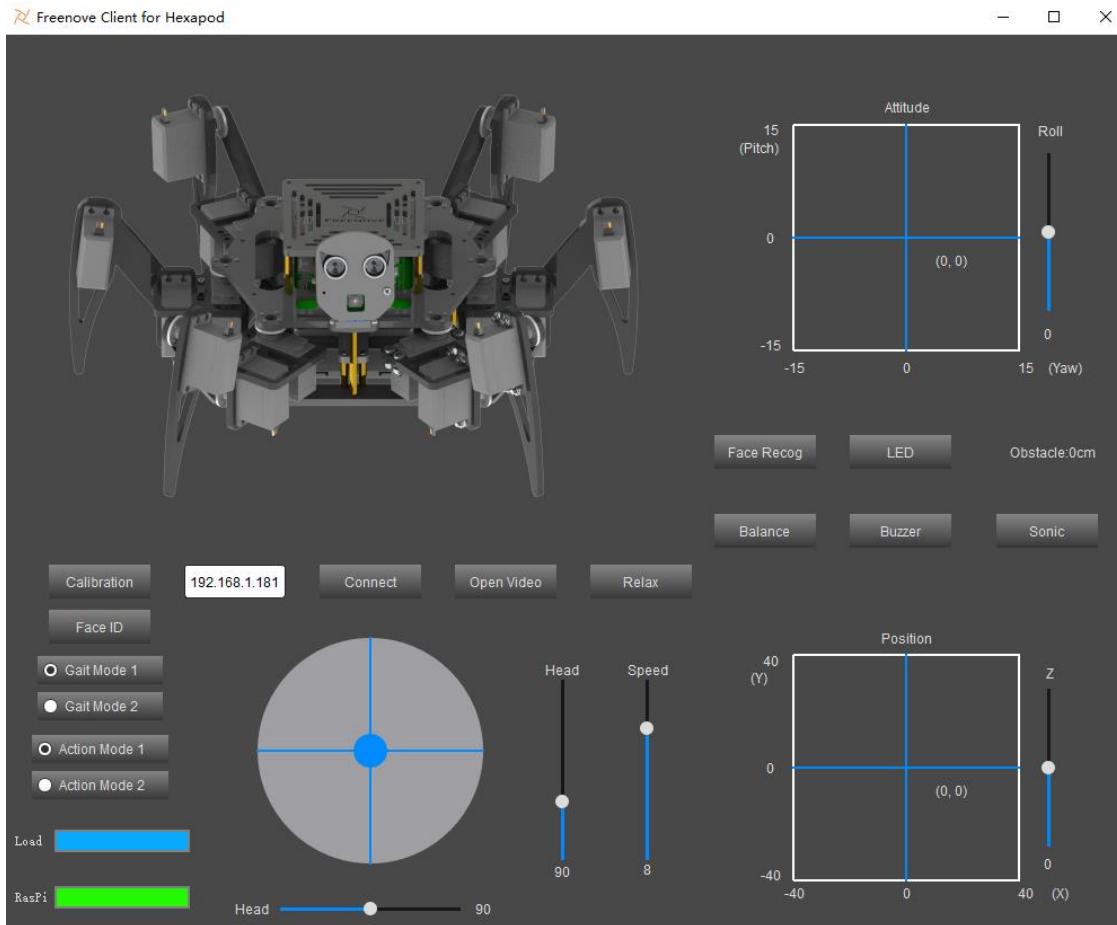

When the Client is opened successfully, you need to turn on Raspberry Pi and open the server. Enter Raspberry Pi's IP address in the white IP editor and click "Connect" to connect the robot with RPi. After connecting successfully, you need to calibrate the robot's six legs before control it to move.

Note: when Raspberry Pi is shut down, server will be closed. You need open server again the next time.

Run Client on macOS system

Running client on macOS system requires the installation of some software and libraries, which take some time. At this point, it does not require to run server and use the Raspberry Pi, so you can turn OFF RPi temporarily. After installing successfully, turn ON the RPi and run the Server. The system comes with python2 instead of python3, so you need to install python3 first, as all the program of this robot are run with python3.

Install python3

Download the installation package via: <https://www.python.org/downloads/>


Python 3.8.1	Dec. 18, 2019	 Download
Python 3.7.6	Dec. 18, 2019	 Download

If your macOS is 11. Like 11.0, please install **python 3.9**.

If your macOS is NOT 11, like 10.15, please install **python 3.8**. If you have installed python 3.9. You need uninstall it first.

Version	Operating System	Description
Gzipped source tarball	Source release	
XZ compressed source tarball	Source release	
macOS 64-bit installer	Mac OS X	for OS X 10.9 and later
Windows help file	Windows	
Windows x86-64 embeddable zip file	Windows	for AMD64/EM64T/x64
Windows x86-64 executable installer	Windows	for AMD64/EM64T/x64
Windows x86-64 web-based installer	Windows	for AMD64/EM64T/x64
Windows x86 embeddable zip file	Windows	
Windows x86 executable installer	Windows	
Windows x86 web-based installer	Windows	


Slide to the bottom of the page and click macOS 64-bit installer.

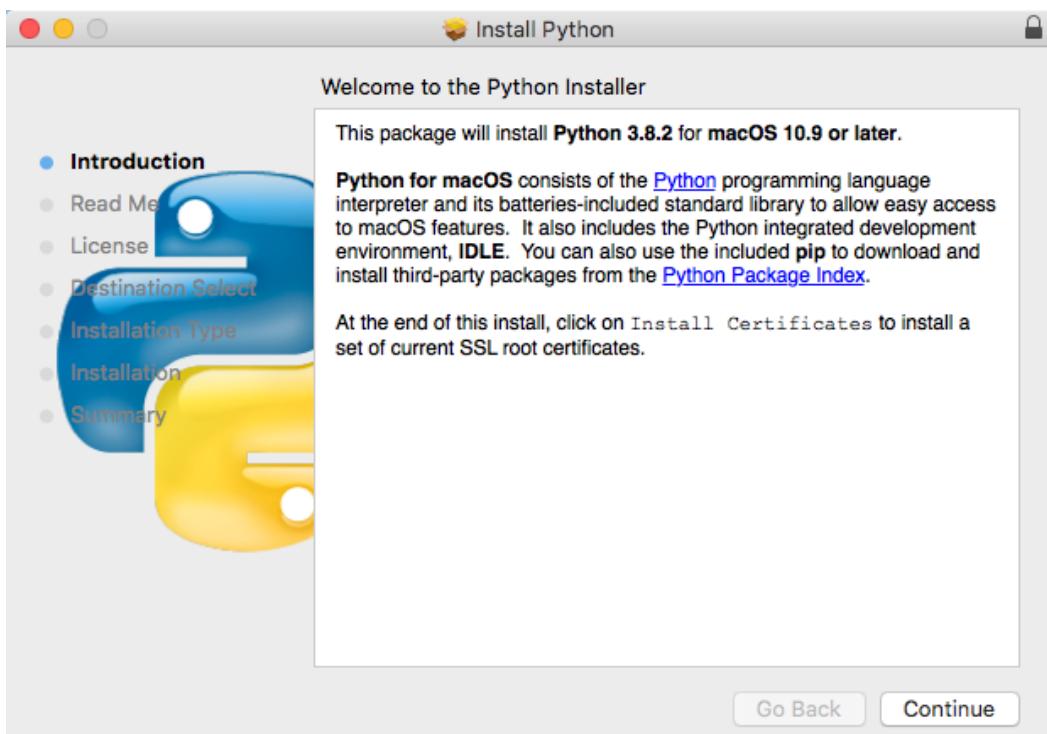


Click Continue




Click Continue

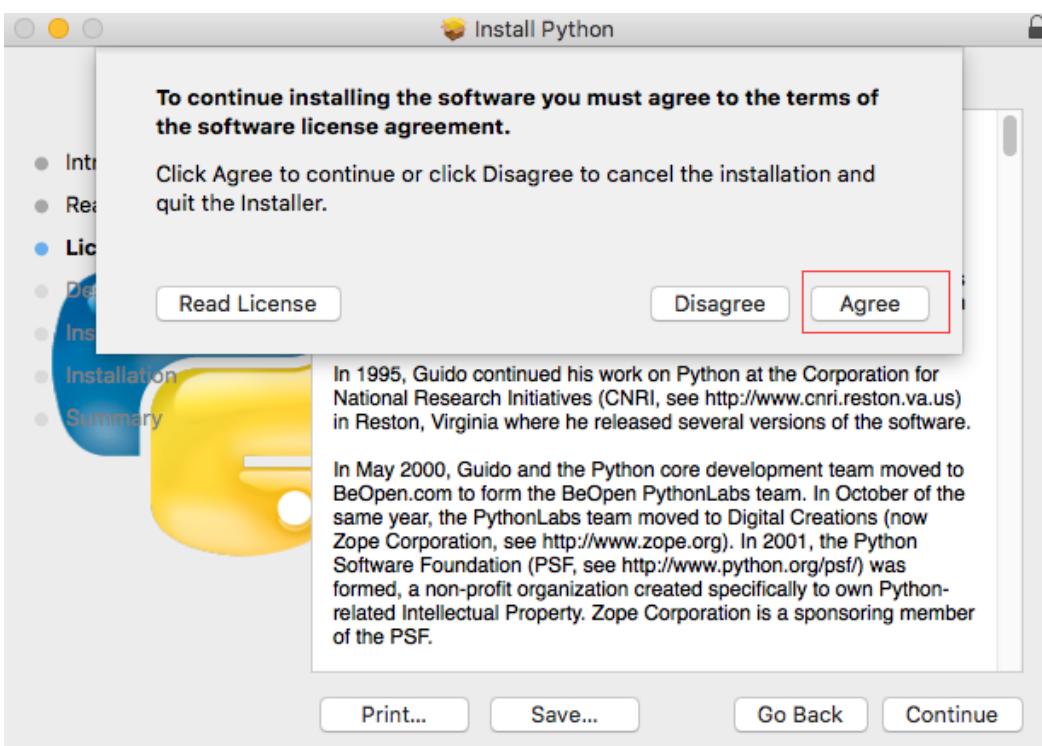


Click Agree

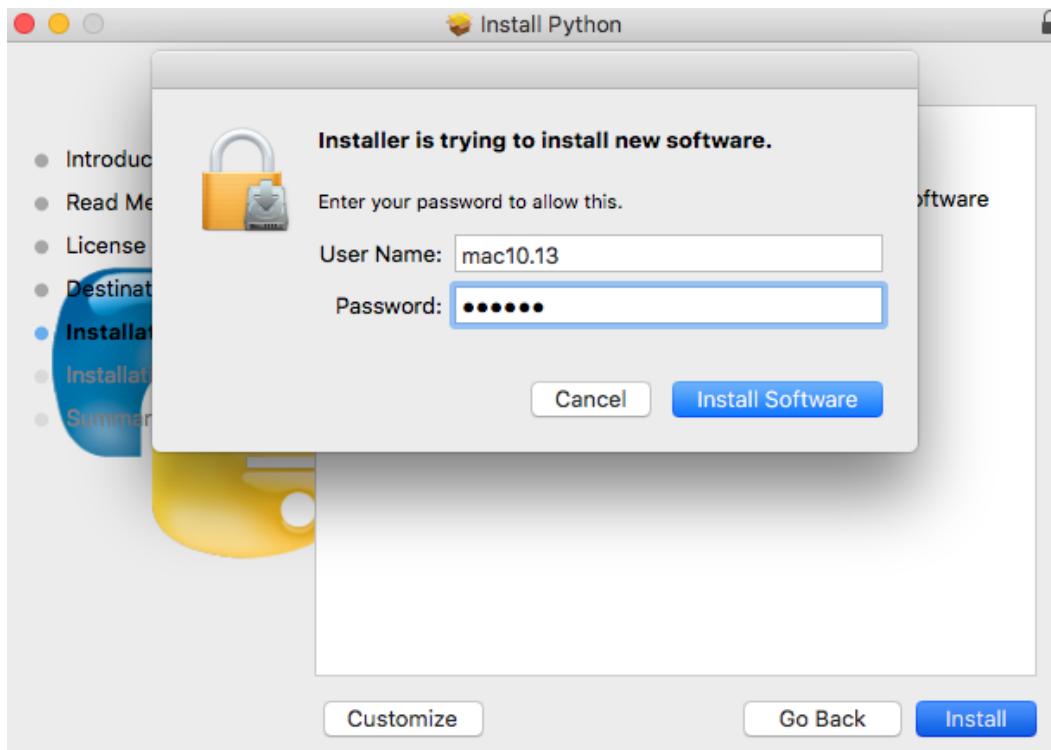

Click "Install", enter the computer password and click "Install Software".

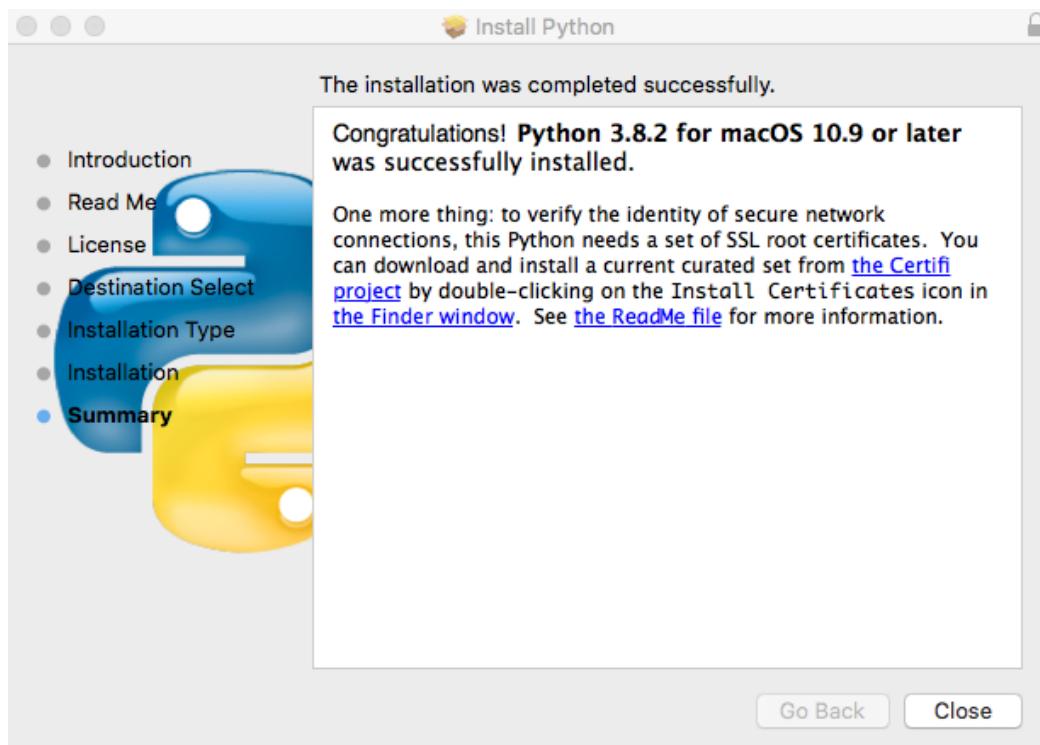

Install successfully

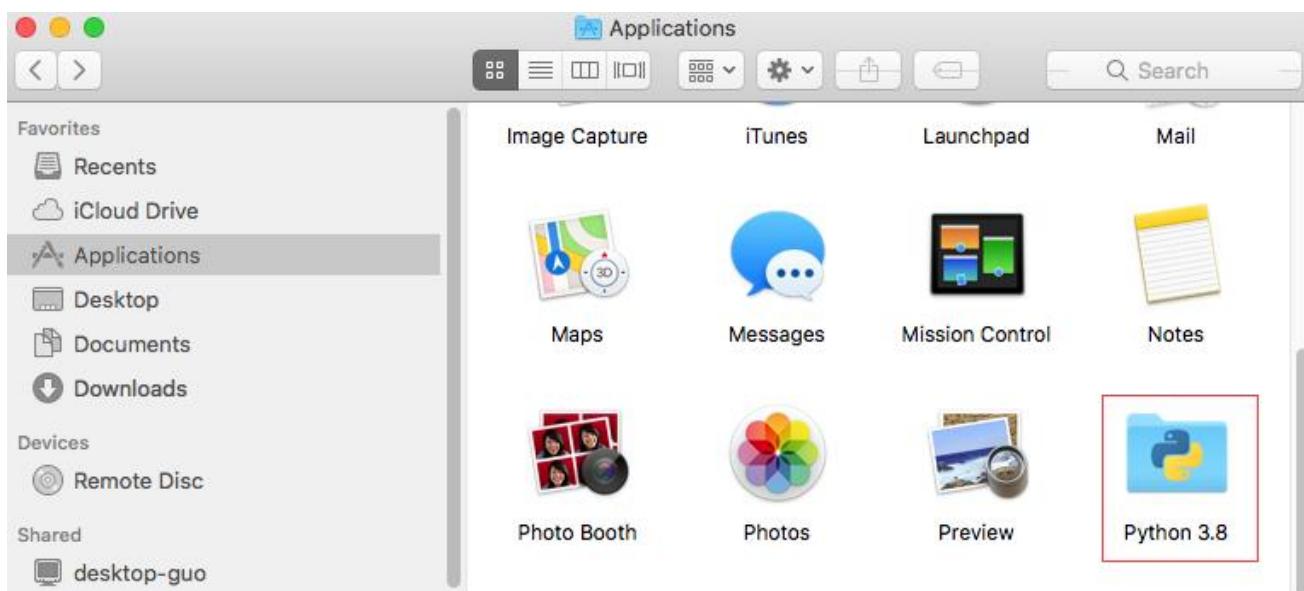


You can find it in your Applications.

Install PyQt5 library, opencv library, numpy library, etc.


If you have not yet downloaded the robot code, you can download it through the following link:

https://github.com/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/archive/master.zip

After downloading, you can find it in "Downloads".

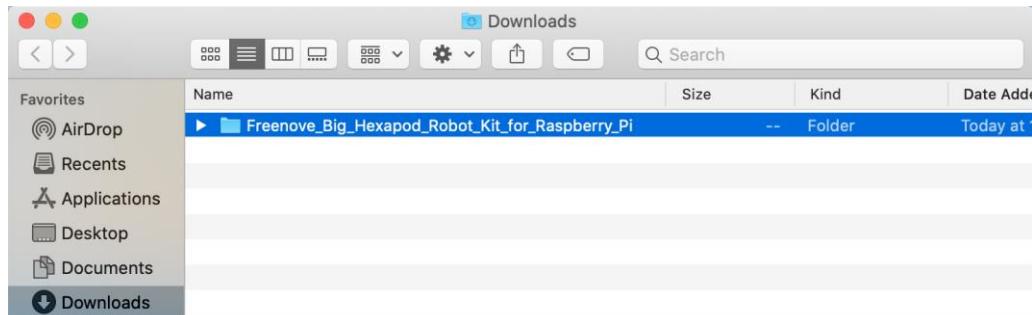

Open "Terminal"

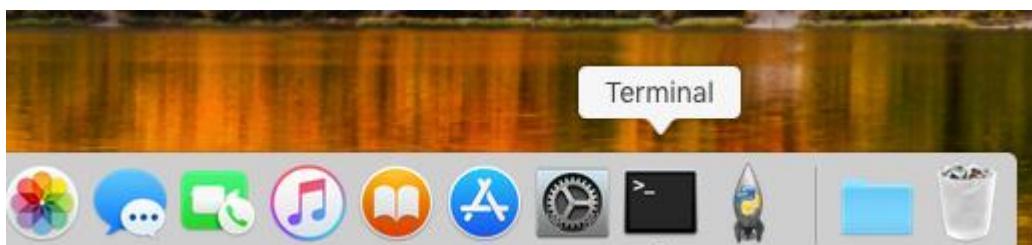

Enter the following commands in "Terminal"

1.Enter "Downloads" (where you save the robot code. If your path is different, please change it.)

```
cd Downloads
```

2.Enter directory where setup_macos.py is located:

```
cd Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/
```

3.Run setup_macos.py:

```
python3 setup_macos.py
```

support@freenove.com

```
[freenove@PandeMacBook-Air ~ % cd Downloads
[freenove@PandeMacBook-Air Downloads % cd Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/
freenove@PandeMacBook-Air Code % python3 setup_macos.py]
```

The installation takes some time, please wait with patience.

Package	Version
numpy	1.19.0
opencv-contrib-python-headless	4.3.0.36
opencv-python-headless	4.3.0.36
Pillow	7.2.0
pip	20.2.1
PyQt5	5.13.2
PyQt5-sip	12.8.0
setuptools	47.1.0
wheel	0.34.2

```
All libraries installed successfully
freenove@PandeMacBook-Air Code %
```

When all the libraries are installed successfully, you can see the prompt “All libraries installed successfully” on the screen. If there is any library fails to install, it will print “Some libraries have not been installed yet. Please run ‘python3 setup_macos.py’ again” on the screen, then you need to execute the command python3 setup_macos.py again.

If you are using **macOS under 11.0, like 10.15. Just skip to “Open client”.**

If you are using **macOS 11.0 or later version**. Please run commands below:

```
pip3 uninstall PyQt5
pip3 install PyQt5
```

Most installation fails because of poor network, so you can check your network before installing the libraries.

Open client


Installing successfully, now you are in the directory where setup_macos.py locates.

1. Enter the following command to enter the client program folder:

```
cd Client/
```

2. Enter the following command to run the program

```
python3 Main.py
```

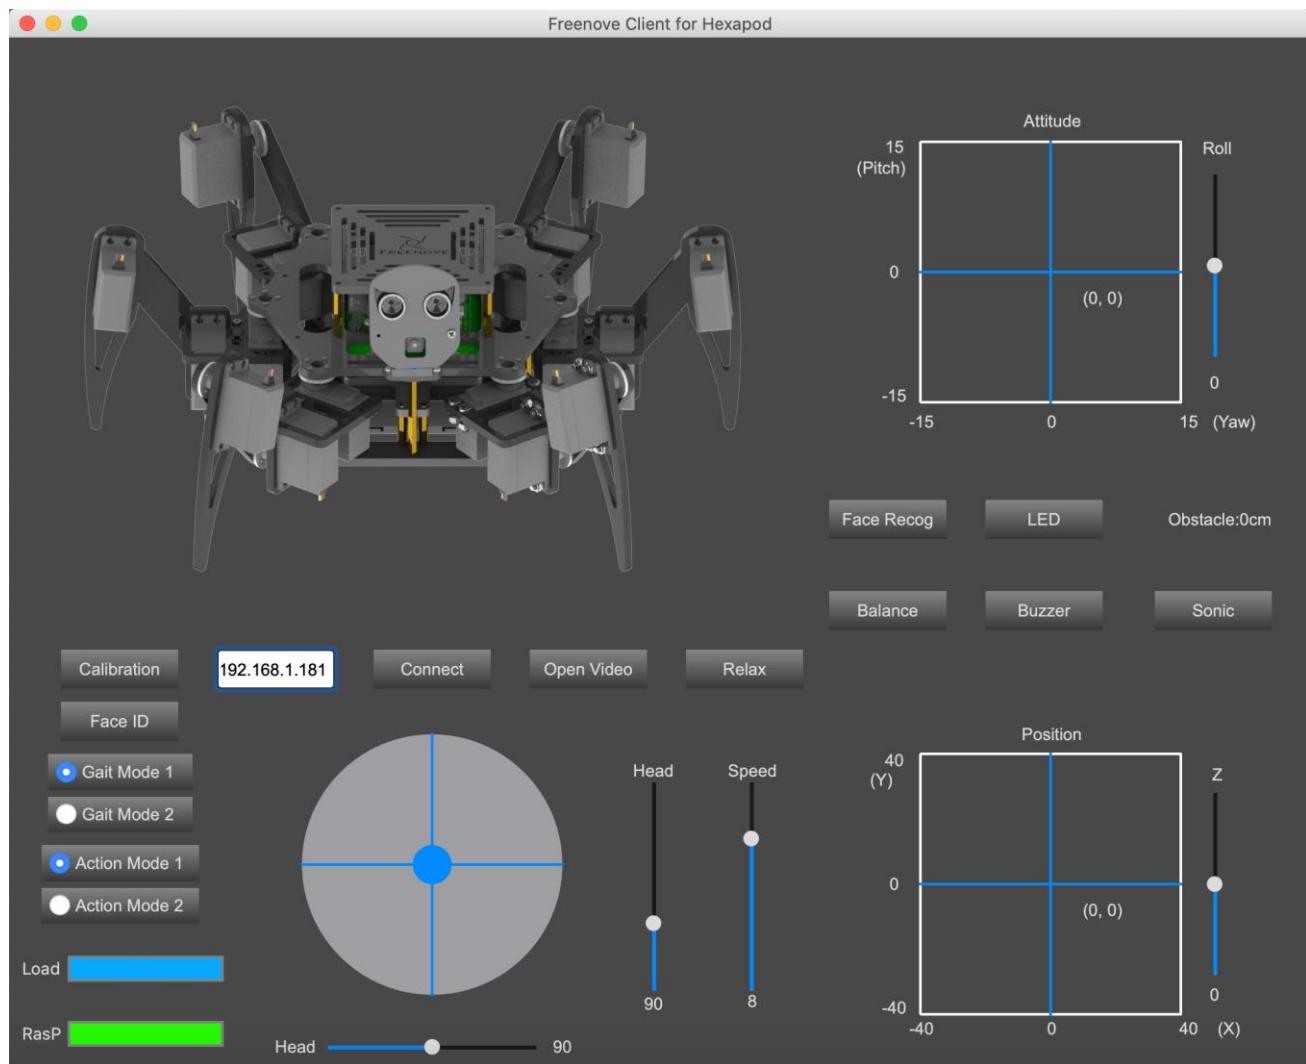

When the Client is opened successfully, you need to turn on Raspberry Pi and open the server. Enter Raspberry Pi's IP address in the white IP editor and click "Connect" to connect the robot with RPi. After connecting successfully, you need to calibrate the robot's six legs before control it to move.

Note: when Raspberry Pi is shut down, server will be closed. You need open server again the next time.



Run client on Raspberry Pi(Linux) system

Install opencv library

Enter the following three commands one by one

```
sudo apt-get install -y libopencv-dev python3-opencv
```

```
sudo pip3 install opencv-contrib-python
```

```
sudo apt-get install -y libatlas-base-dev libjasper-dev
```

Open client

Enter the following commands at the terminal.


1. Use the cd command to go to the directory where Main.py is located.

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Client
```

2. Run Main.py:

```
sudo python Main.py
```

The interface is shown below:

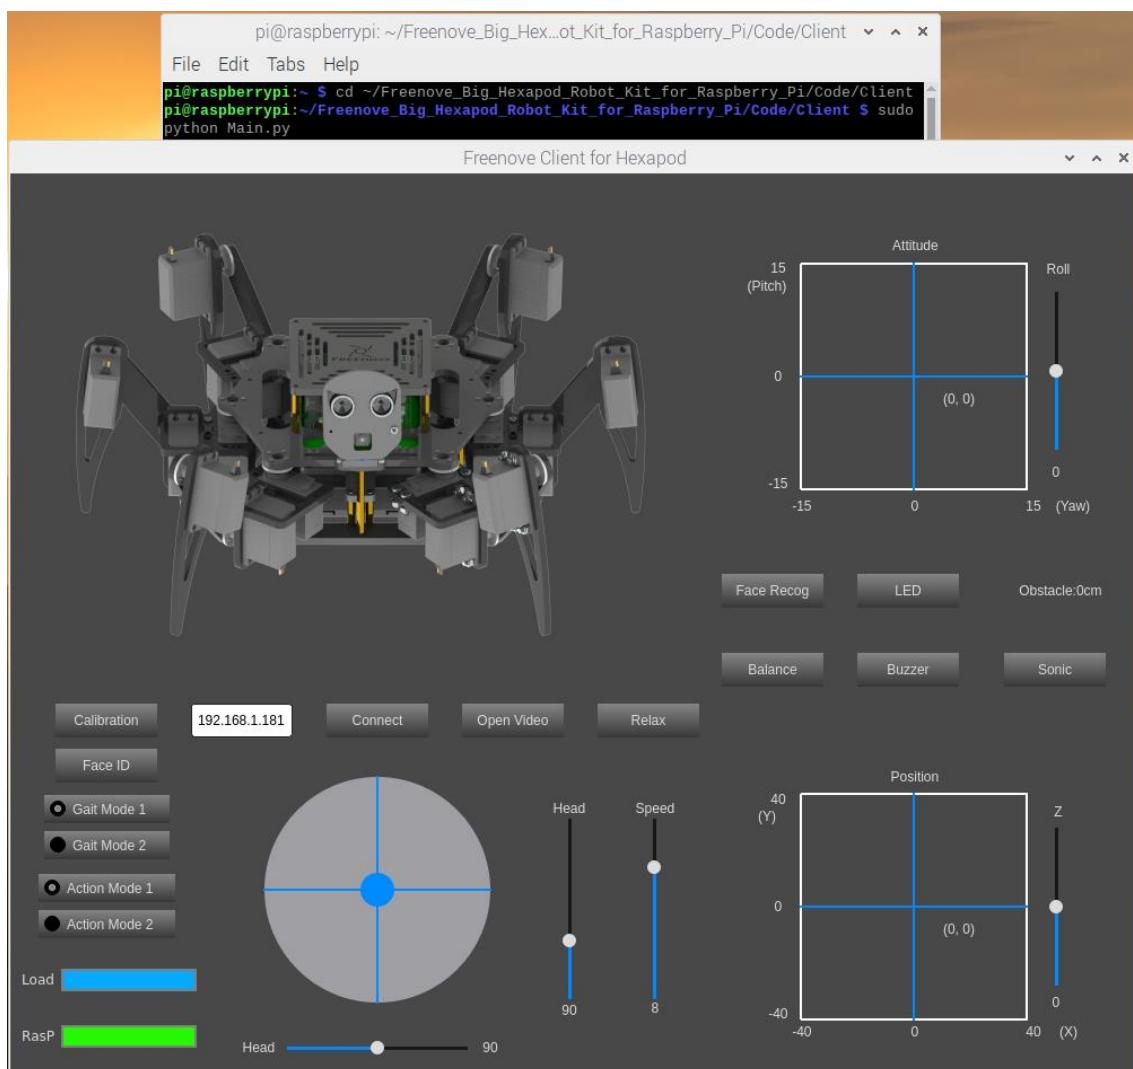

When the Client is opened successfully, you need to turn on Raspberry Pi and open the server. Enter Raspberry Pi's IP address in the white IP editor and click "Connect" to connect the robot with RPi. After connecting successfully, you need to calibrate the robot's six legs before control it to move.

Note: when Raspberry Pi is shut down, server will be closed. You need open server again the next time.


Calibration

Calibrate the robot's six legs


1. Lay the calibration paper on a horizontal table.
2. Place the robot to the corresponding position on the calibration paper as shown below:



3. Connect client with server successfully, click the "Calibration" button on the client, then a calibration window pops up.

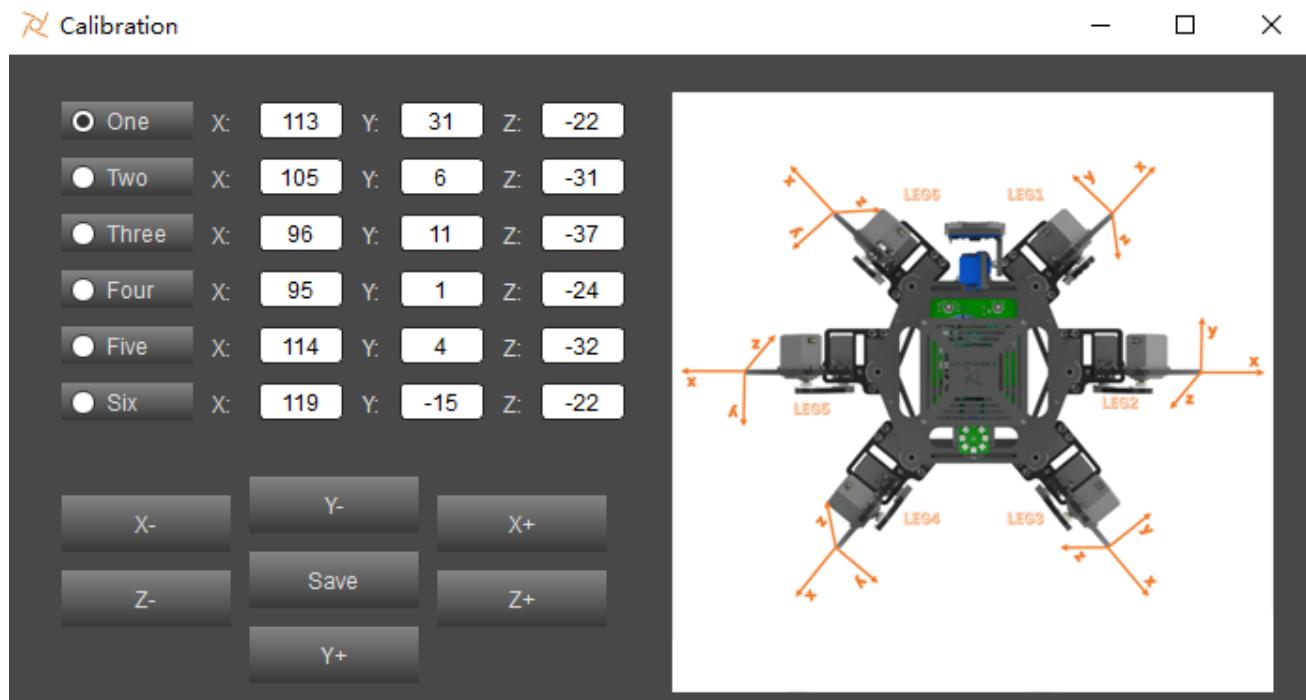


4. Calibrate the six legs to make the six foot points fall to the corresponding positions. (Due to the error of the installation and error of the servos themselves, the six foot points may fail to fall to the specified position perfectly, which is reasonable but we should try to make them as accurate as possible.)

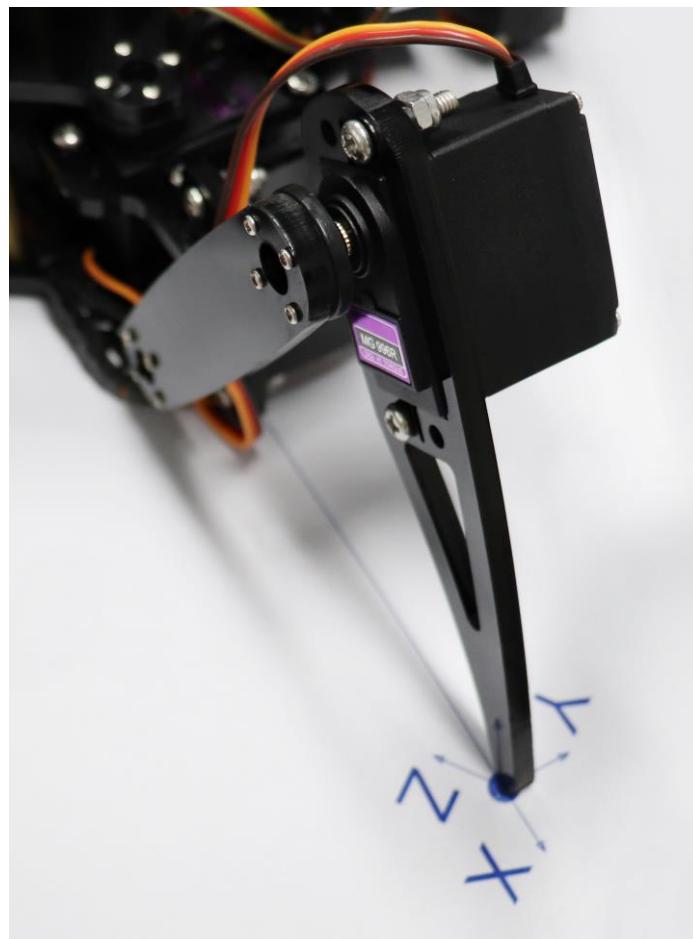

5. When all the six foot points fall to the specified positions, click "Save" and you can control the robot to move.

Note: Poor calibration will affect the robot's movement. You can recalibrate it when needed.

Control

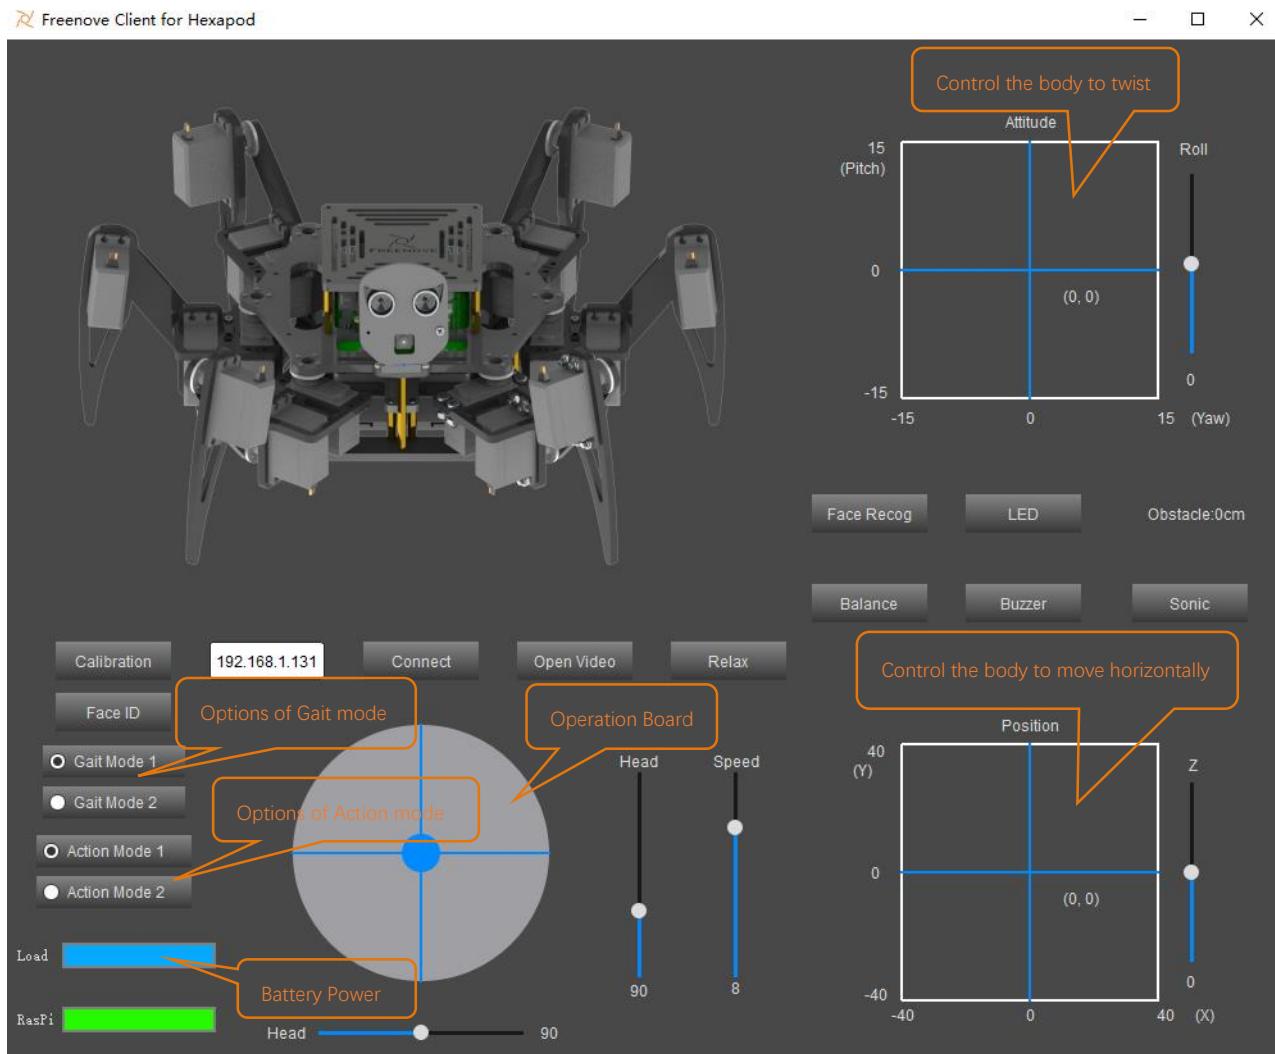

The following is the corresponding operation of the buttons and keyboards.

Button on Client	Key	Action
ForWard	W	Move
BackWard	S	Back off
Turn Left	A	Turn left
Turn Right	D	Turn right
Connect/ Disconnect	C	Connection ON/OFF
Open Video/ Close Video	V	Video ON/OFF
Relax	R	Relax/Activated
LED	L	Open LED control interface
Balance	B	balance mode ON/OFF
Face Recog	F	face recognition ON/OFF
Sonic	U	Ultrasonic ranging ON/OFF
Calibration	T	Open calibration interface
Face ID	I	Open the face reading interface
Buzzer/Noise	Y	Buzzer ON/OFF

The function of SliderBar is below:

SliderBar	Function
Head	Rotate the robot's head
Speed	Control the robot's speed

Free your innovation

If you have any concerns, please feel free to contact us via support@freenove.com

If you want to write your own program to control the robot dog, you can follow this chapter.

The robot program is based on python3. If your python is python2 by default, please change to python3.

If you have never learned python before, you can learn some basics through the following links:


<https://python.swaroopch.com/basics.html>

Program


First, open Thonny Python IDE which is easy to use for beginners.




Create a new file.

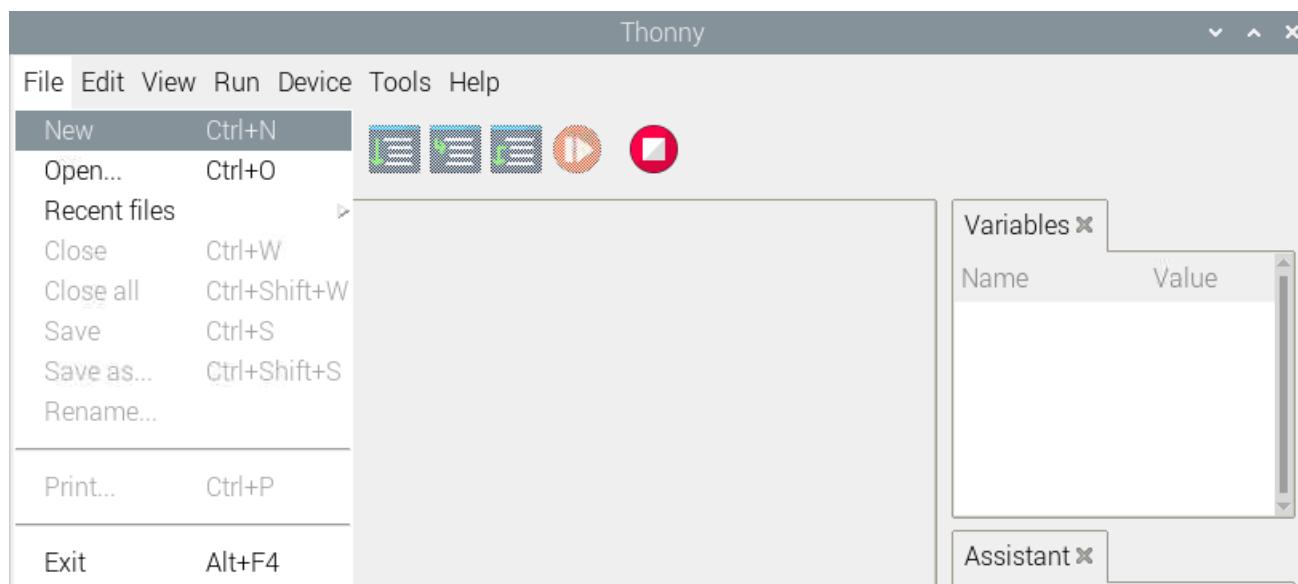


Name it myCode and save it in Server folder of robot code folder that you have downloaded.

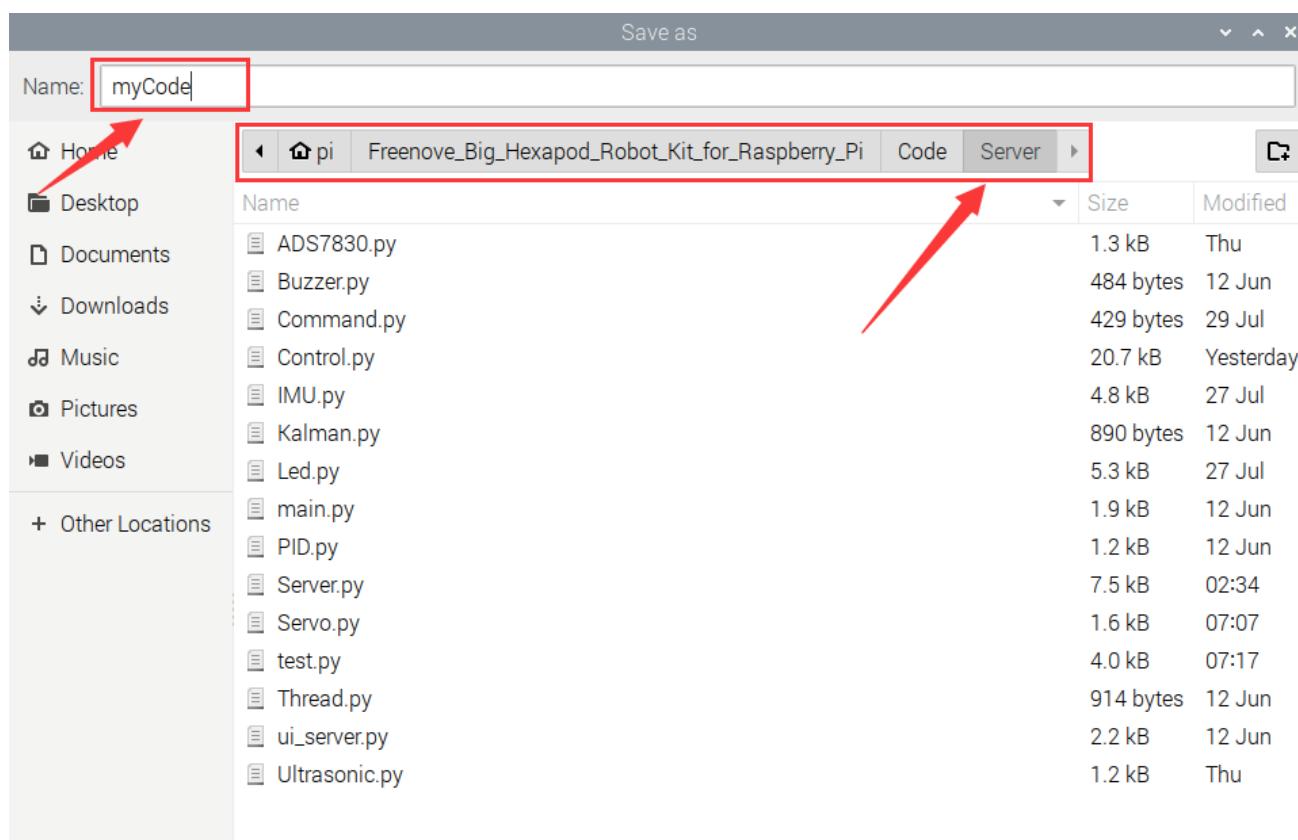

Open the Server folder of the robot code and you can see the file you created.

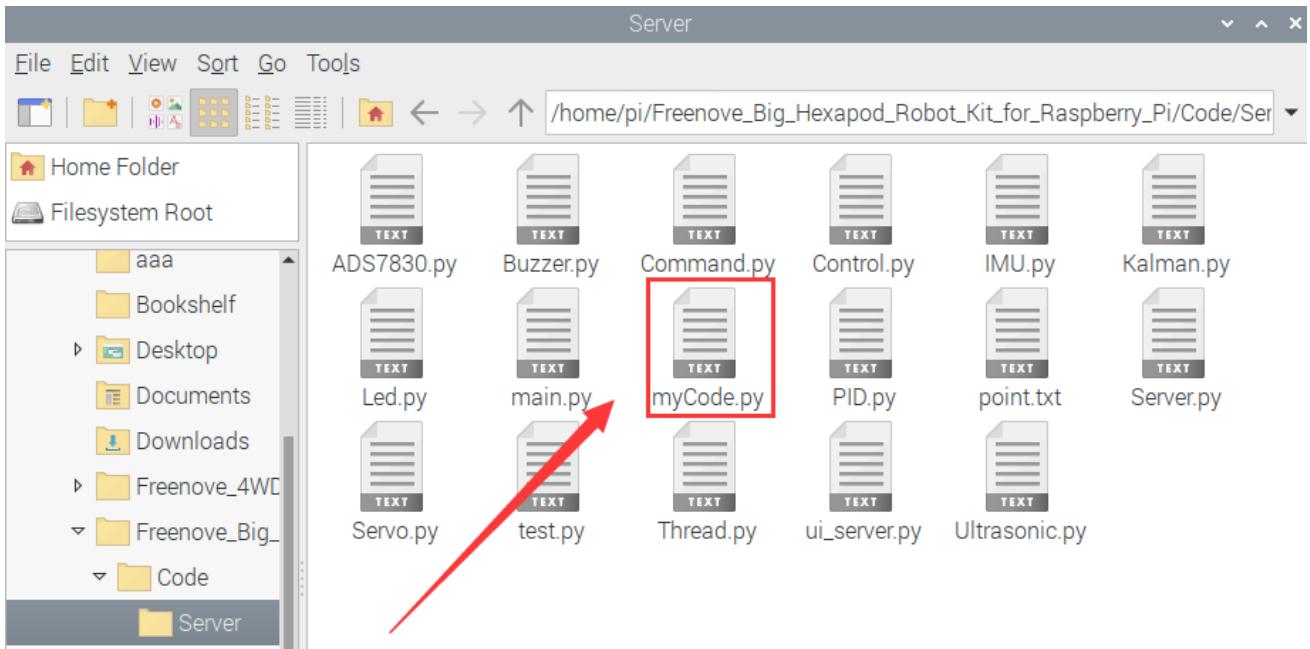

Write the code in myCode.py and click save after finishing, as shown below.

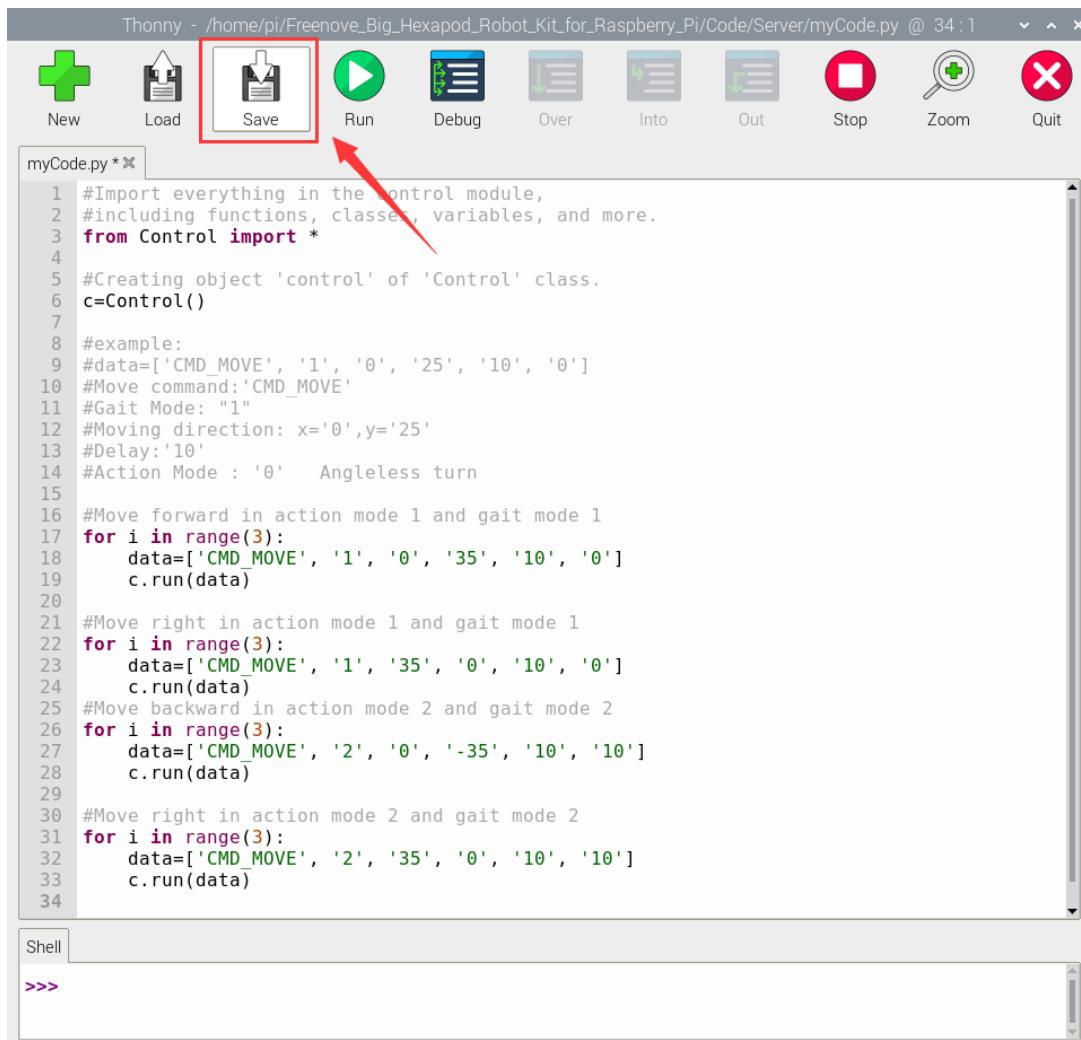

Type the following command to enter the directory where myCode.py is located.

```
cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
```

Run myCode.py

```
sudo python myCode.py
```

```
pi@raspberrypi: ~$ cd ~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server
pi@raspberrypi:~/Freenove_Big_Hexapod_Robot_Kit_for_Raspberry_Pi/Code/Server $ sudo
python myCode.py
```

Result:

The robot moves straight forward first and then walks to the right (Gait Mode1 and Action Mode1), and then it moves back and turn right.(Gait Mode2 and Action Mode2)

Related py Files

Some important functions included in the py files are listed below. For more detailed code, please refer to the corresponding py file.

ADS7830.py

Function	Description
voltage(channel)	Returns the voltage value of corresponding channel
batteryPower()	Returns the voltage value of the two sets of batteries

Buzzer.py

Function	Description
run(command)	Enter 0, the buzzer will not sound; Enter 1, the buzzer sounds.

Contorl.py

Function	Description
coordinateToAngle(x,y,z)	Enter the foot coordinate and it returns the rotation angle of servos on each joint.
angleToCoordinate(a,b,c)	Enter the joint angles and it returns the foot coordinate.
Condition()	Process the action command
coordinateTransformation()	Transformation of coordinate system
map()	Mapping a value from one range to another
Position(x,y,z)	Control the in-situ movement of the body in x,y,z directions
postureBalance(r,p,y)	Control in-situ twist of the body(deflection angle, roll Angle and course angle)
run()	Control the movement of the robot with two gait modes and two



	action modes.
--	---------------

IMU.py

Function	Description
imuUpdate()	Update the current deflection angle, roll angle and course angle of the robot

Led.py

Function	Description
ledIndex(Index, R, G, B)	Turn ON a single LED and set its color
wheel(pos)	Generate RGB value of different colors
LED_TYPR(order,R_G_B)	Change the order in which the LED color data is transmitted. When the value of the order parameter is "RGB", the order of data transmission should be: R-G-B; when the value of the order parameter is "GBR", and the order of data transmission should be: G-B-R
theaterChaseRainbow(strip, wait_ms)	The function is used to make 7 LEDs show one color at the same time, and change various colors to blink. The blinking interval is wait_ms, and the default value is 50ms
rainbow(strip, wait_ms)	This function achieves the effect of rainbow breathing. It makes 7 LEDs display same color at the same time, and then change all various colors like breathing. The interval is wait_ms. The default value is 20ms.
rainbowCycle(strip, wait_ms)	This function also achieves the effect of rainbow breathing. but unlike rainbow(), it makes eight LEDs to display different colors at the same time, and then change various color separately. The interval is wait_ms. The default value is 20ms

Servo.py

Function	Description
setServoAngle(channel, angle)	Rotate the servo of specified channel to a specified angle

Ultrasonic.py

Function	Description
getDistance()	Obtain the distance between the ultrasonic module and the barrier in front of it.

Android and iOS app

You can download and install the Freenove Android app from below:

On Google play:

<https://play.google.com/store/apps/details?id=com.freenove.suhayl.Freenovez>


On GitHub:

https://github.com/Freenove/Freenove_App_for_Android

In this github repository, you can find the App instruction (Tutorial.pdf).

You can download and install the Freenove **iPhone ios app** by searching **freenove** in app store.

The interface of the APP is shown below:

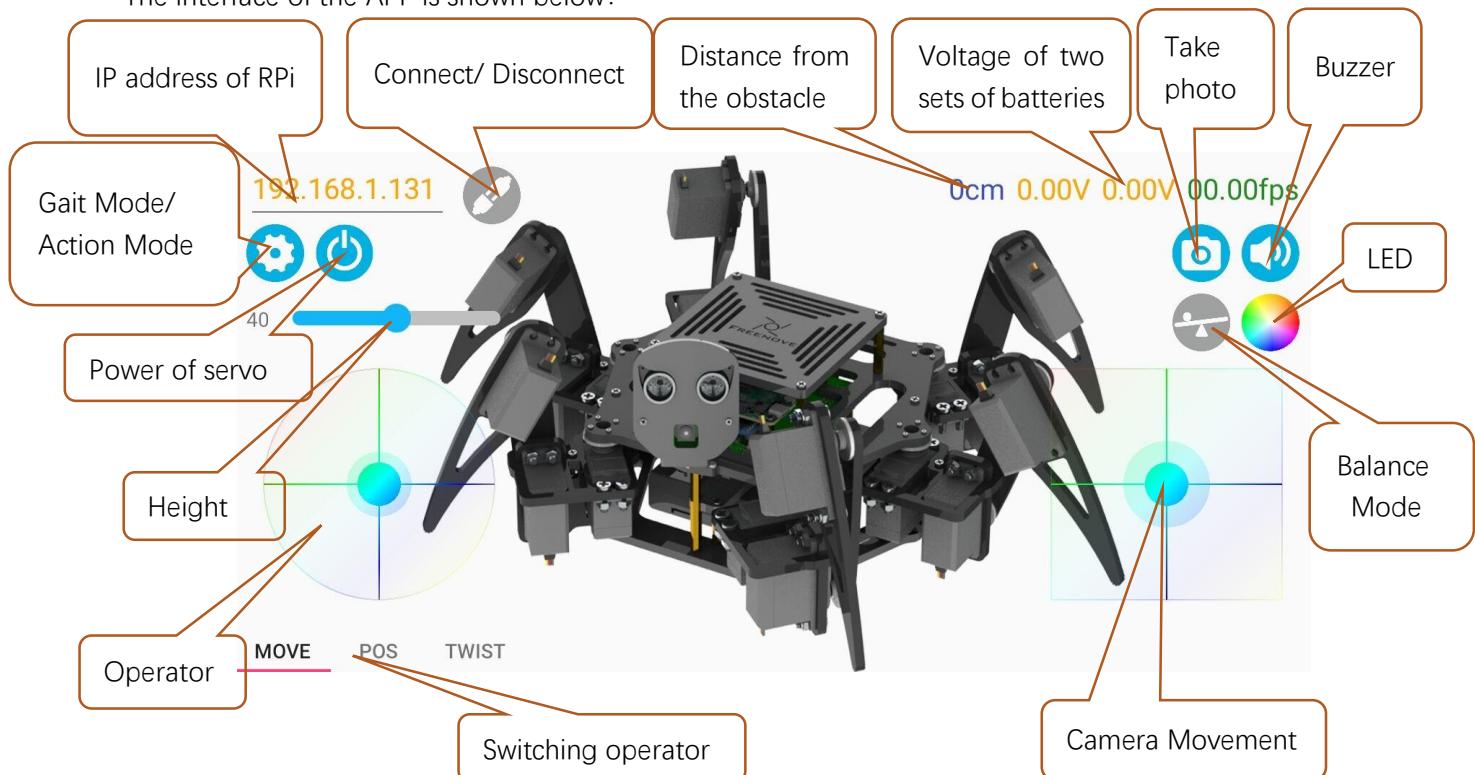

The servos and the Raspberry Pi are powered by two separate, independent power supplies. When the servos are powered OFF, the power supply of RPi remains its original state.



What's Next?

THANK YOU for participating in this learning experience!

We have reached the end of this Tutorial. If you find errors, omissions or you have suggestions and/or questions about the Tutorial or component contents of this Kit, please feel free to contact us:
support@freenove.com

We will make every effort to make changes and correct errors as soon as feasibly possible and publish a revised version.

After completing the contents in this book, you can try to reform this robot by purchasing and installing other Freenove electronic modules, or improving the code to achieve different functions. We will also try our best to add more new functions and update the code on our github (<https://github.com/freenove>).

If you want to learn more about Arduino, Raspberry Pi, Smart Cars, Robotics and other interesting products in science and technology, please continue to visit our website. We will continue to launch fun, cost-effective, innovative and exciting products.

<http://www.freenove.com/>

Thank you again for choosing Freenove products.