


Configure Routing Vlans Layer 3 Switch

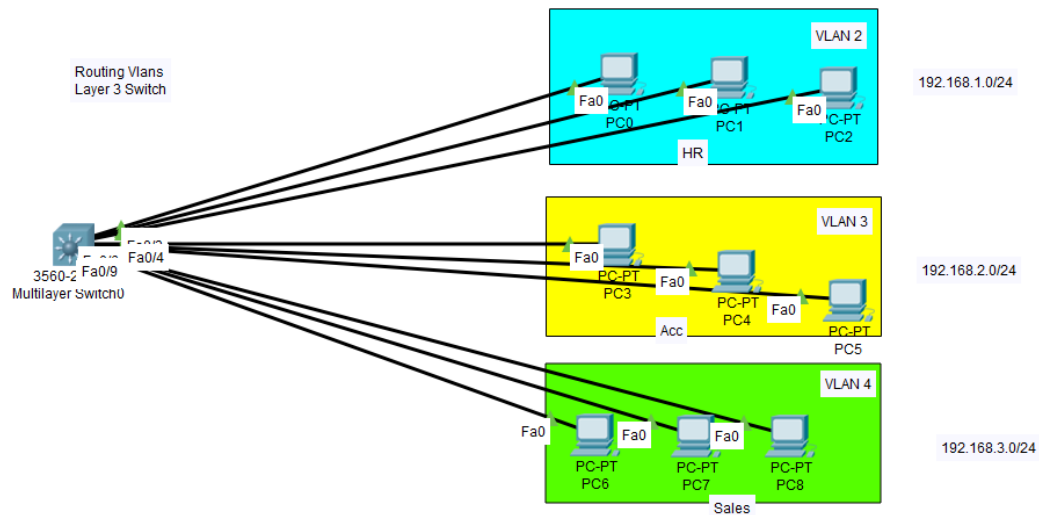

- **Configure Vlans Layer 3 Switch**

```
SW>enable
```

```
SW#conf t
```

```
SW(config)#vlan 2
```

```
SW(config-vlan)#name HR
```

```
SW(config)#vlan 3
```

```
SW(config-vlan)#name ACC
```

```
SW(config)#vlan 4
```

```
SW(config-vlan)#name SALES
```

- **Configure interfaces Fa 0/1-3**

```
SW (config)#int range fa 0/1-3
```

```
SW (config-if)#switchport mode access
```

```
SW (config-if)#switchport access vlan HR
```

- **Configure interfaces Fa 0/4-6**

```
SW (config)#int range fa 0/4-6
```

```
SW (config-if)#switchport mode access
```

```
SW (config-if)#switchport access vlan ACC
```

- **Configure interfaces Fa 0/7-9**

```
SW (config)#int range fa 0/7-9
```

```
SW (config-if)#switchport mode access
```

```
SW (config-if)#switchport access vlan SALES
```

Sw(config-if-range)#do show vlan

VLAN Name	Status	Ports
1 default	active	Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/24, Gig0/1
2 HR	active	Gig0/2, Fa0/1, Fa0/2, Fa0/3
3 ACC	active	Fa0/4, Fa0/5, Fa0/6
4 SALES	active	Fa0/7, Fa0/8, Fa0/9
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN Type	SAID	MTU	Parent	BridgNo	BridgeNo	Stp	BrdoMode	Transl
-----------	------	-----	--------	---------	----------	-----	----------	--------

Sw(config-if-range)#exit

- **Configure IP ADDRESS VLAN 2**

Sw(config)#interface vlan 2

Sw(config-if)#no shutdown

Sw(config-if)#ip address 192.168.1.1 255.255.255.0

➔ here Default Gateway

- **Configure IP ADDRESS VLAN 3**

Sw(config)#interface vlan 3

Sw(config-if)#no shutdown

Sw(config-if)#ip address 192.168.2.1 255.255.255.0

➔ here Default Gateway

- **Configure IP ADDRESS VLAN 4**

Sw(config)#interface vlan 4

Sw(config-if)#no shutdown

Sw(config-if)#ip address 192.168.3.1 255.255.255.0

➔ here Default Gateway

Sw(config-if)#exit

Sw(config)#ip routing

Sw(config)#exit

Sw#show ip route

```
Sw#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
       area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    192.168.1.0/24 is directly connected, Vlan2
C    192.168.2.0/24 is directly connected, Vlan3
C    192.168.3.0/24 is directly connected, Vlan4

Sw#
```

Go TO All Computer Give ip & Gateway