


SECTION IV

Radiation exercises

Exercise IV.1 (Infinite pipe segment **):


Consider an infinite long pipe segment as in the figure.

**Tasks:**


- Specify the view factors Φ_{12} , Φ_{31} and Φ_{33} as a function of Φ_{13} .
- Determine Φ_{13} .

Exercise IV.2 (Solar power tower ★):

Solar radiation is uniformly and radially redirected toward a central cylindrical receiver in a solar tower plant by a surrounding mirror field (radiation density \dot{q}_s''). Consequently, the surface of the receiver is heated to a temperature of T_R , and the thermal power output of the plant is \dot{Q}_{th} .

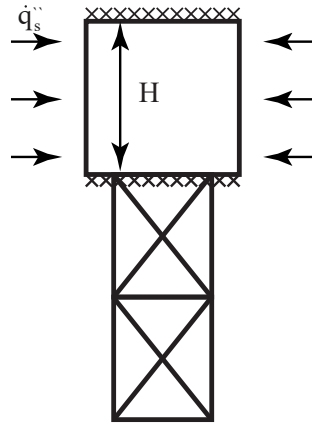

(a) Side view

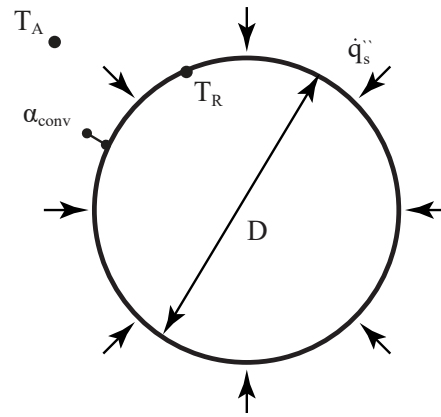

(b) Top view

Given parameters:

- Receiver height: H
- Receiver outer diameter: D
- Receiver surface temperature: T_R
- Receiver emissivity of the surface: ϵ
- Heat transfer coefficient: α_{conv}
- Ambient temperature: T_A

Hints:


- Heat losses in the interior of the receiver as well as at its ends can be neglected.
- Radiation from the ambient can be neglected.
- The receiver can be considered as a grey body.

Tasks:

- a) From a balance around the receiver, determine the mean radiation density \dot{q}_s'' as a function of the thermal load \dot{Q}_{th} .

Exercise IV.3 (Hemispherical dome **):

A thin circular plate (P) is covered by a hemispherical, transparent, grey dome (D). A radiative heat flux from the ambient \dot{q}_{amb}'' is uniformly falling on the dome.

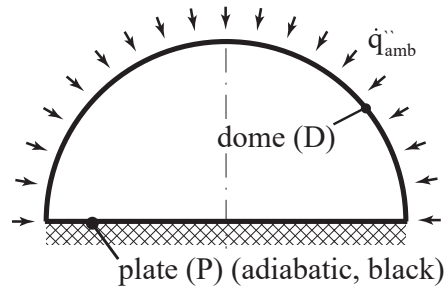

Given parameters:

- | | |
|-----------------------------------|--------------------------|
| • Temperature of the dome: | T_D |
| • Surfaces of the plate and dome: | A_P, A_D |
| • Radiative heat flux: | \dot{q}_{amb}'' |
| • View factor: | Φ_{DP} |
| • Absorptivity of the plate: | $\alpha_P = 1$ |
| • Reflectivity of the dome: | $\rho_D = 0$ |
| • Transmissivity of the dome: | τ_D |
| • Emissivity of the dome: | ϵ_D |

Hints:


- Conduction and convection are to be neglected.
- All surfaces are radiating diffusely.

Tasks:

- Derive an expression for the temperature of the plate T_P .

Exercise IV.4 (Light bulb **):

The filament of a light bulb emits diffuse radiation \dot{Q}_F . The glass of the bulb is thin, spherical, and acts as a gray body. The surface of the filament is small in comparison to the glass body and the problem is steady in time.

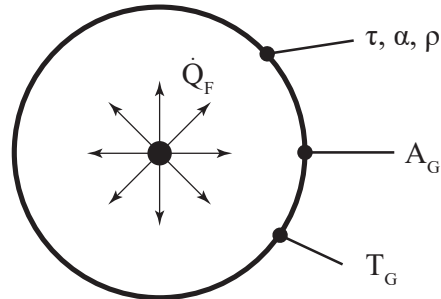**Given parameters:**

- Power consumption of the filament: \dot{Q}_F
- Glass properties: τ, α, ρ
- Surface of the glass sphere: A_G

Hints:

- The surface of the filament in comparison to the glass body is small.

Tasks:

- a) Provide the energy balance in terms of given variables for determining the glass temperature T_G , while neglecting radiation from the environment.