

DRAWING KEY


FOLD TYPES



A - FOLD (ABOVE)




B - FOLD (BESIDE)




C - FOLD (COVER)




LINE TYPE/COLOR




CUT




50% SCORE




CREASE




45° DOUBLE BEVEL




45° SINGLE BEVEL




EDGE BEVEL



CAVITY




REMOVE PAPER



REFERENCE/
OPTIONAL



SYMBOLS



FT Bushwacker

Designed By: Peter Sripol
Drawing By: Dan Sponholz



WEIGHT W/O BATTERY:

18.4 oz 521 g

RECOMMENDED SETUP:


THROW 16°
EXPO 30%
AILERON: 16°
ELEVATOR: 16°
RUDDER: 16°

RECOMMENDED EQUIPMENT:

MOTOR: Park 425 1000kv minimum
ESC: 18 - 30 amp
BATTERY: 1300 - 2200 mAh 3s
SERVOS: 9 gram X 4 - 6
PROP: 9 X 6 - 10 X 4.7

AIRCRAFT SPECIFICATIONS:


LENGTH: 33.5 in 851 mm
WING SPAN: 45 in 1143 mm
WING AREA: 338.8 in² 21.9 dm²
CG: 1.75 in 44 mm
AUW: 25 oz 711 g
WL: 10.6 oz./ft² 32.4 g/dm²
WCL: 6.9

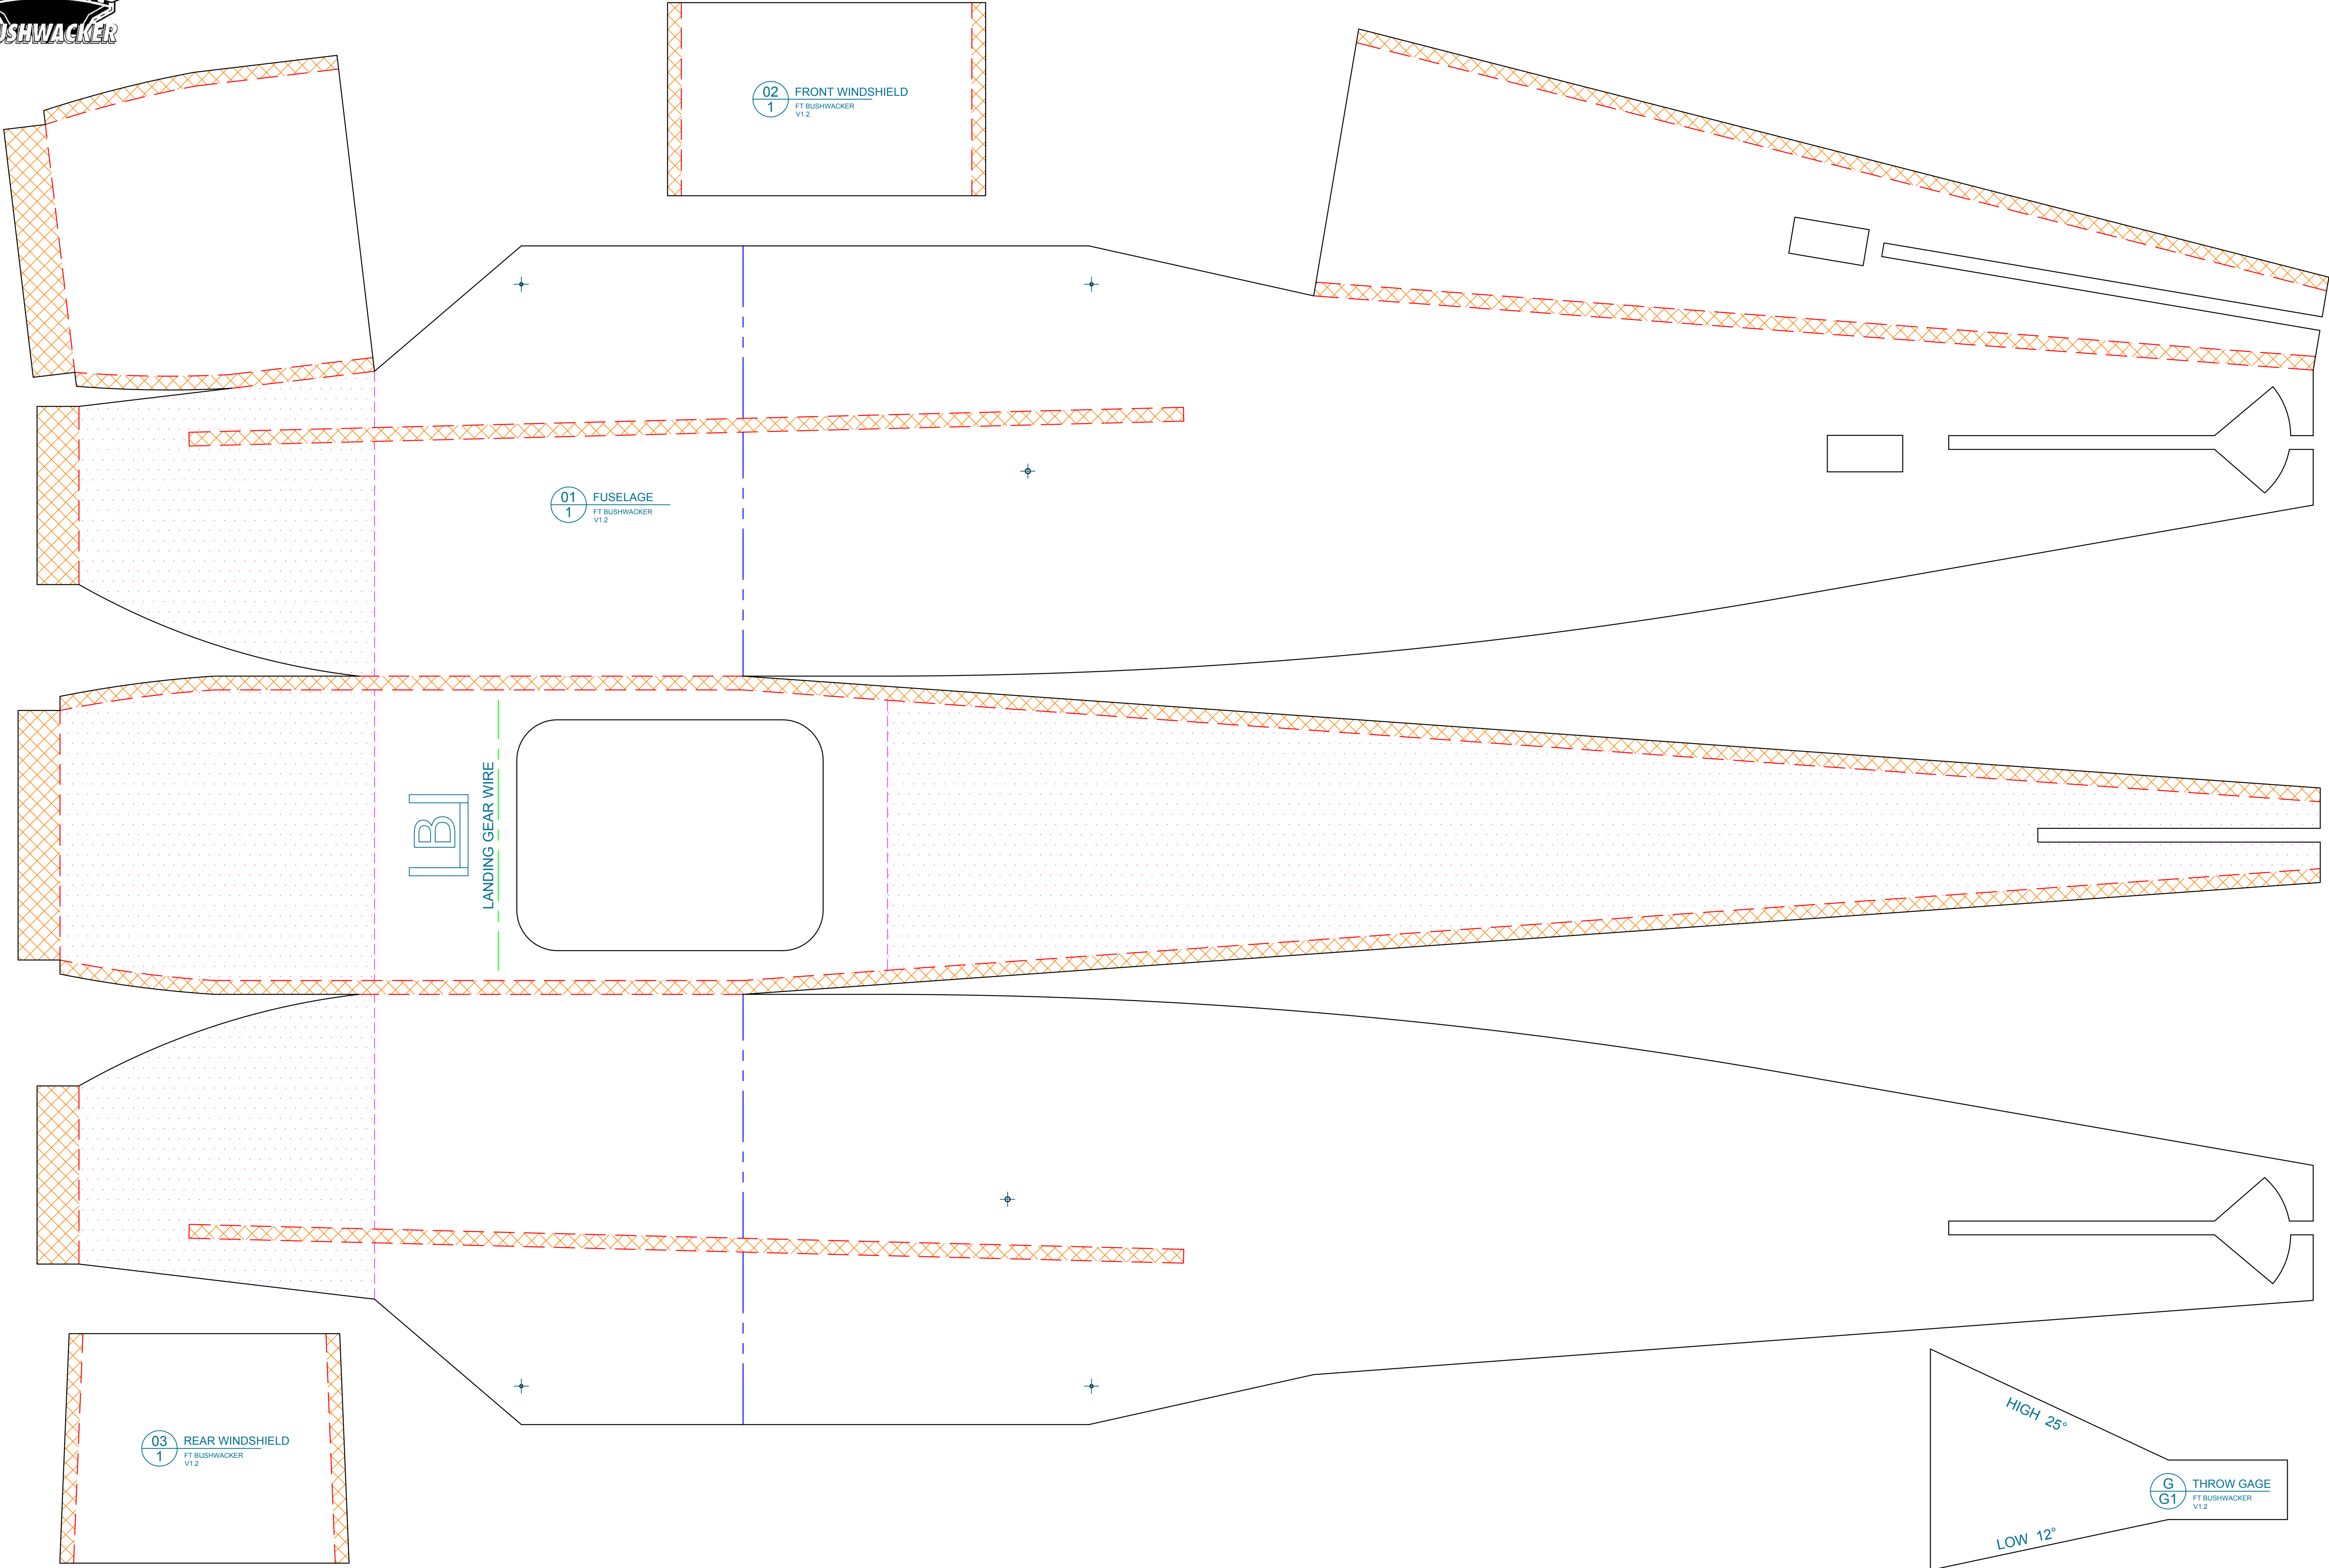

Designed By: Peter Sripol
Drawing By: Dan Sponholz




Designed By: Peter Sripol
Drawing By: Dan Sponholz

HEET: 2 OF: 4

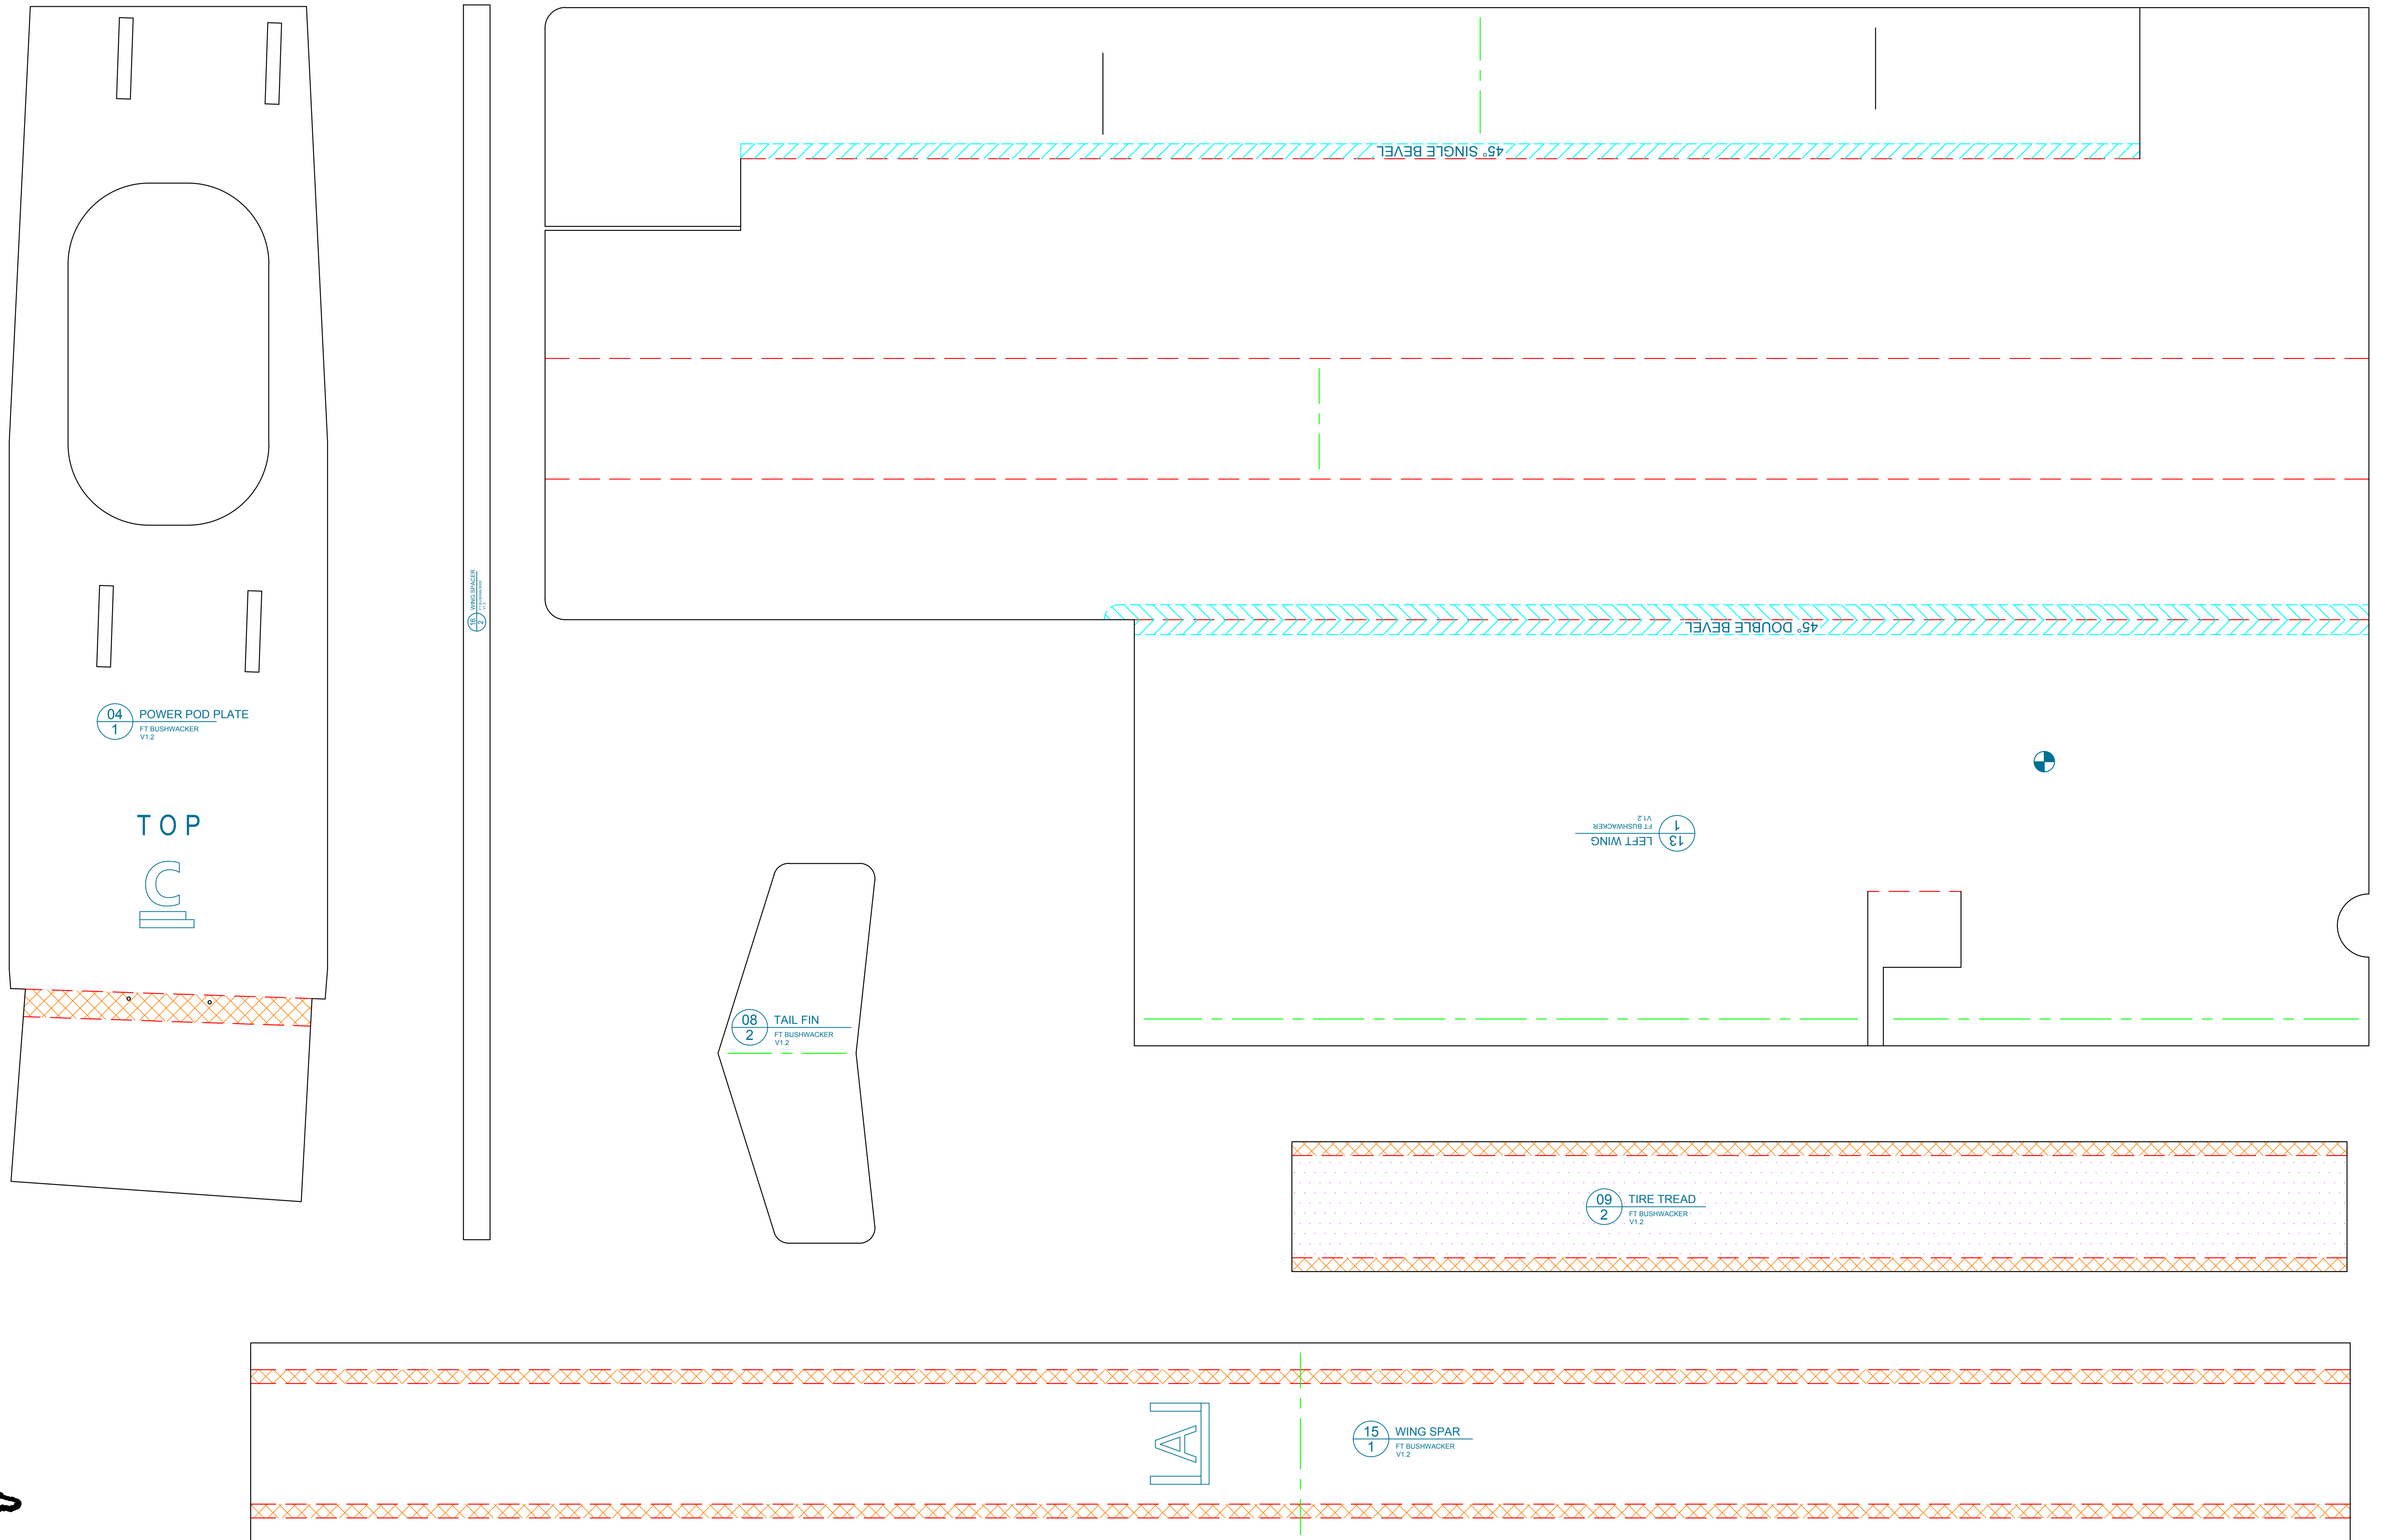

Designed By: Peter Sripol
Drawing By: Dan Sponholz

HEET: 3 OF: 4

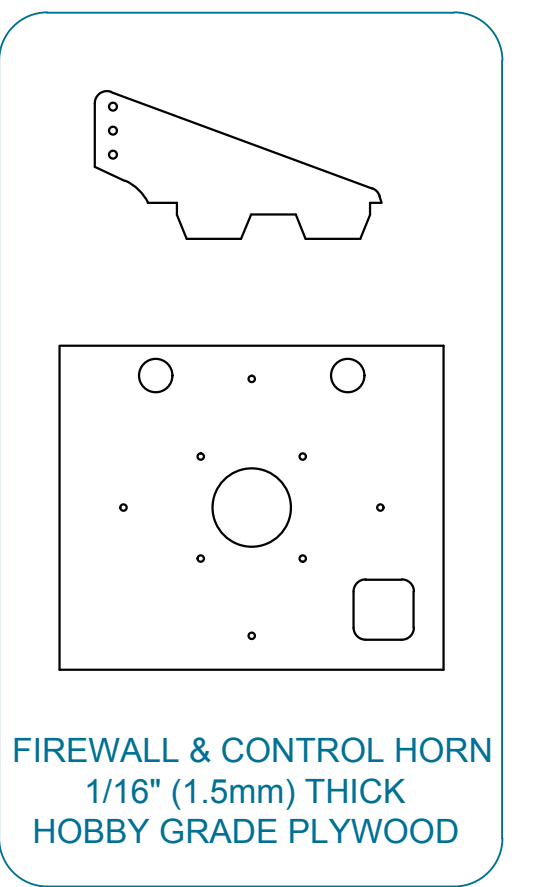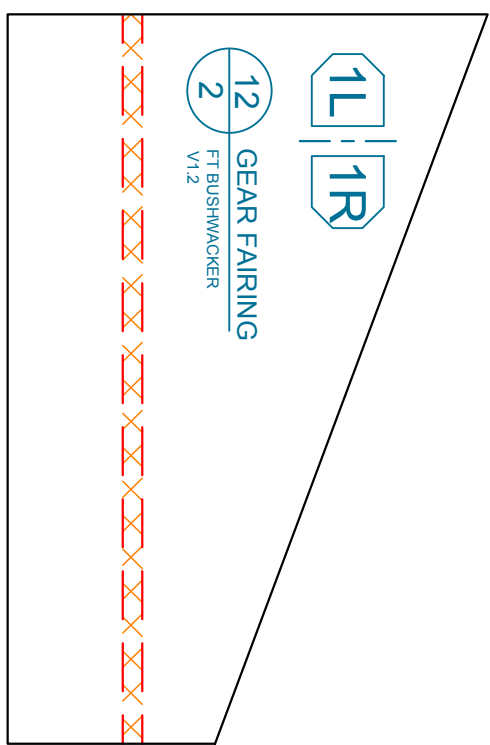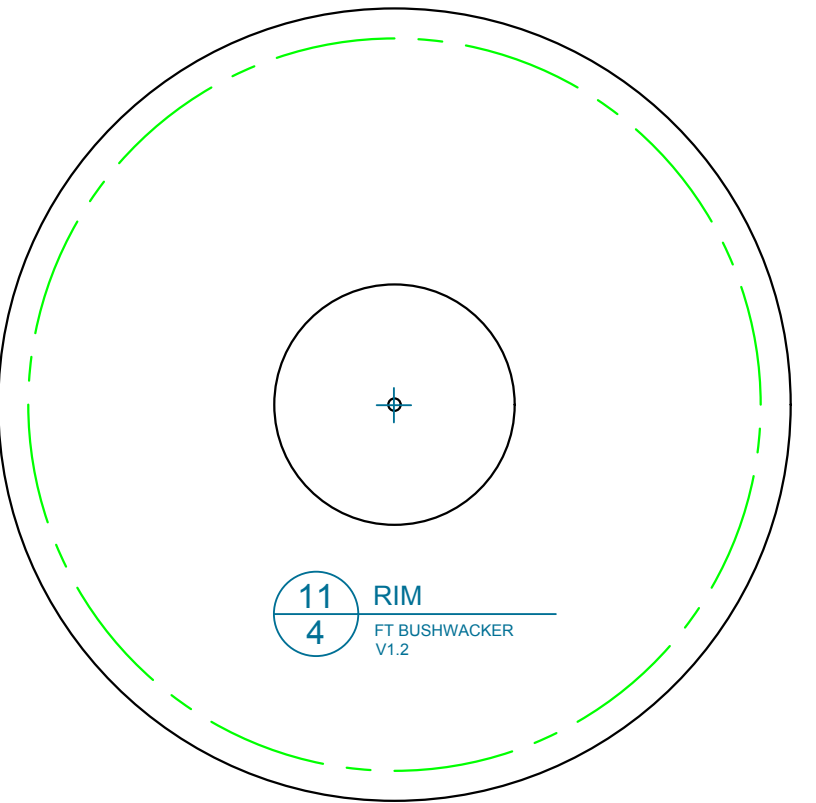

Designed By: Peter Sripol
Drawing By: Dan Sponholz

HEET: 4 OF: 4



00 POWER POD
1 FT BUSHWACKER
V1.2

