
Note 2
150 Drawing Released
For construction.
Mo 5.5.13

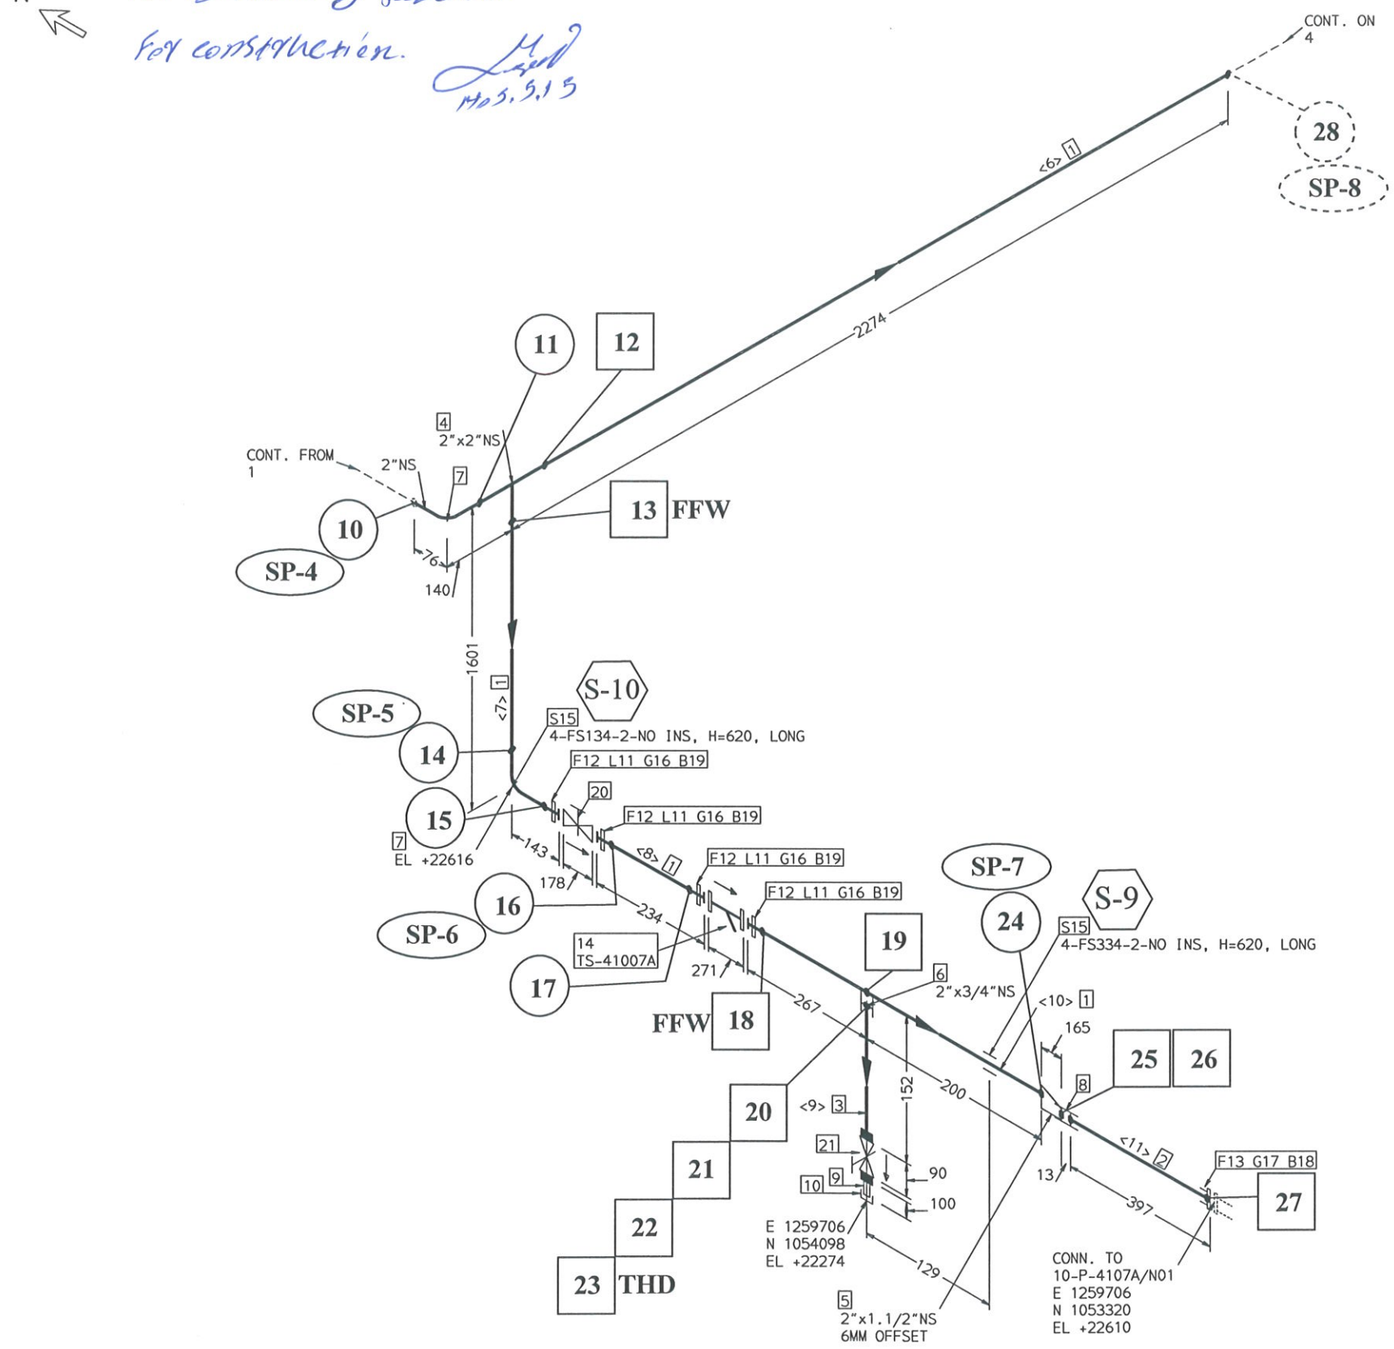

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE 10S BE EFW(EJ=1) A312-TP304 ASME B36.19	2	P11C1A	4.2M
2	PIPE 40S PE SMLS A312-TP304 ASME B36.19	1.1/2	P74C0A	0.4M
3	PIPE 40S PE SMLS A312-TP304 ASME B36.19	3/4	P74C0A	0.1M
	FITTINGS			
4	EQUAL TEE 10S 10S BW A403-WP304-W EFW(EJ=1) ASME B16.9	2 x 2	TT1111BG2A	1
5	SWAGED NIPPLE ECC. 10S 40S BLE/PSE A403-WP304-W EFW(EJ=1) MSS SP-95	2 x 1.1/2	NSE90BYG0A	1
6	HALF COUPLING 3000# SW A182-F304 ASME B16.11	2 x 3/4	CH90SG0A	1
7	ELBOW 90 LR 10S BW A403-WP304-W EFW(EJ=1) ASME B16.9	2	EL11BG2A	2
8	FULL COUPLING 3000# SW A182-F304 ASME B16.11	1.1/2	CF90SG0A	1
9	STRAIGHT NIPPLE 40S SMLS TOE A312-TP304 (L=100mm) ASME B36.19	3/4	NI74YNC0A	1
10	CAP 3000# NPT A182-F304 ASME B16.11	3/4	KA90NG0A	1
	FLANGES			
11	STUB END SP 10S BW A403-WP304-W EFW(EJ=1) ASME B16.9	2	S12E11RG2A	4
12	FLANGE LAP JOINT 150# FF A105 ASME B16.5	2	F12RAE0A	4
13	FLANGE SOCKET WELD 40S 300# RF A182-F304 ASME B16.5 SRF	1.1/2	F14K74RG0A	1
	VALVES / IN-LINE ITEMS			
14	Y-STRAINER 150# RF 304SS BODY W/304SS ELEMENT	2		1
	SUPPORTS			
15	STRESS SUPPORT	2	1S1-ATTA-2"-	2

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
16	GASKET 150# RF SHEET NON-ASBESTOS 2mm THK KLINGER C-4430 or EQ. ASME B16.21	2	G12S1Q19	4
17	GASKET SPIRAL WOUND 300# RF TEFLON FILLER 304SS HOOP & I.R. CS O.R. 4.5mm THK KLINGER MAXIFELEX CRIR OR EQ. ASME B 16.20	1.1/2	G14V6R79	1
	BOLTS			
18	90 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	3/4	BSP0CUP	4
19	90 STUD BOLT ASTM A193 GR.B7 + 2 HEAVY HEX NUTS ASTM A194 GR.2H ASME B18.2 PTFE COATED	5/8	BSP0CUP	16
	VALVES / IN-LINE ITEMS			
20	VALVE GATE 150# RF A351-CF8 BODY W/304SS TRIM OSY-BB FLEXIBLE WEDGE	2	VGA4R1	1
21	VALVE GATE 800# SW A182-F304 BODY W/304SS TRIM HF-BODY SEAT OSY-BB SOLID WEDGE	3/4	VGU4S1	1

****
* CONT. ON 3 *
****

PROJECT:	HDPE PLANT AND UTILITY (2146)
OWNER:	RAYAN POLYMER POUYA COMPANY
CONTRACTOR:	HAMPA ENERGY ENGINEERING & DESIGN COMPANY
DOCUMENT NO.:	2146-ISO-25-0010
LINE NO.:	2"-HX-41001-1S1
ISOMETRIC NO.:	ISO-25-1021
SHT NO.:	2 /5
REF. P&ID DWG.:	4101
REF. PLAN DWG.:	2146-10-20-DD-PI-DWG-0011-12

PRESSURE (barg.) DESIGN:	3.5
PRESSURE (barg.) OPERATING:	0.69
TEMPERATURE (C.) DESIGN:	120
TEMPERATURE (C.) OPERATING:	45
INSULATION TYPE:	NO INS
INSULATION THK (mm):	0
TEST FLUID:	Air
TEST PRESSURE: (barg.)	3.9
PAINT:	P-13
NDT:	B
PWHT:	ASME B31.3
LOCATION:	AG
LEVEL:	2
LINE CLASS:	1S1

REV.	DATE	DESCRIPTION	PRE'D.	CHE'D BY	APP'D BY
0	01.08.2026	TOTALLY HOLD	M.IM	R.D	M.A

NOTE
1- ROOT GAPS OF BUTT WELD FITTINGS ARE NOT INCLUDED IN DIMENSIONS
2- ISOMETRIC DRAWING FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONSTRUCTOR BEFORE INSTALLATION.
3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONSTRUCTOR EXCEPT AS NOTED.
4- ACTUAL DIMENSION AND SIZE OF SPECIAL/INSTRUMENT ITEMS SHALL BE CHECKED BEFORE SPOOL FABRICATION BY CONSTRUCTION CONTRACTOR.

Petro Pars Ghodrat Co.

Piping Supervision

THIS DOCUMENT AND THE DESIGN IT COVERS IS THE PROPERTY OF POGC AND ALL RIGHTS ARE RESERVED. NEITHER IN WHOLE NOR IN PART MAY BE REPRODUCED OR TRANSMITTED TO THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF OWNER.