
DI61P-02

TERMINALS OF ECU

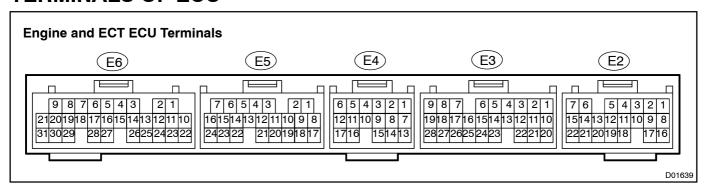

Symbols (Terminals No.)	Wiring Color	Condition	STD Voltage (V)
OIL - E2 (E4, 17 - E5, 18)	GR ↔ BR	ATF temperature: 115°C (239°F) or more	Below 1.5
S1 – E1 (E4, 1 – E5, 17)	L-Y ↔ BR	IG ON	9.0 – 14
		1st or 2nd gear	9.0 – 14
		3rd or 4th gear	Below 1.5
S2 - E1 (E4, 2 - E5, 17)	G-Y ↔ BR	IG ON	Below 1.5
		2nd or 3rd gear	9.0 – 14
		1st or 4th gear	Below 1.5
SLU+ - SLU- (E4, 7 - E4, 13)	G-W ↔ L-R	IG ON	Below 3.0
		Moving	Pulse signal is output Below 1.5 ↔ 4 – 6
SP2+ - SP2- (E4, 5 - E4, 11)	L-Y ↔ R-L	Moving	Pulse signal is output Below 1.5 ↔ 4 – 6
L – E1 (E5, 21 – E5, 17)	Y-G ↔ BR	IG ON and Shift lever L range	9.0 – 14
		IG ON and Shift lever other than L range	Below 1.5
2 - E1 (E5, 20 - E5, 17)	G-W ↔ BR	IG ON and Shift lever 2 range	9.0 – 14
		IG ON and Shift lever other than 2 range	Below 1.5
D – E1 (E3, 11 – E5, 17)	GR-B ↔ BR	IG ON and Shift lever D range	9.0 – 14
		IG ON and Shift lever other than D range	Below 1.5
R – E1 (E5, 19 – E5, 17)	R-B ↔ BR	IG ON and Shift lever R range	9.0 – 14
		IG ON and Shift lever other than R range	Below 1.5
N – E1 (E6, 24 – E5, 17)	G-R ↔ BR	IG ON and Shift lever N range	9.0 – 14
		IG ON and Shift lever other than N range	Below 1.5
P – E1 (E5, 10 – E5, 17)	G ↔ BR	IG ON and Shift lever P range	9.0 – 14
		IG ON and Shift lever other than P range	Below 1.5
STP - E1 (E3, 6 - E5, 17)	G-W ↔ BR	IG ON and Brake pedal is depressed	7.5 ~ 14
		IG ON and Brake pedal is released	Below 1.5