

MobilTM

Unit ID: 4-RK-1

Asset ID: 50074760

Description: Kiln 2 Drive Trunion Bearing 1

Caution

Account Information

ID: 402009

Name: Greer Lime

Address: 1088 Germany Valley Limestone Road, Riverton, WV 26814-0000 US

Parent Account: MATTHEWS LUBRICANTS, INC.

Sample Information

Sample ID: 25147132035

Service Level: Essential

Bottle ID: a033686769

Tested Lubricant: MOBIL SHC 636

Equipment Information

Asset Class: Circulating System





Manufacturer:

Model:

Lubricant: MOBIL SHC 636

Sample Data & Trends

Sample Info	Report Status	Normal	Caution	Alert	Alert	Caution
	Sample ID	24047458028	24162579021	24330183010	25044280016	25147132035
	Service Level	Essential	Essential	Essential	Essential	Essential
	Bottle ID	a022889765	a029204425	a033583429	a033561706	a033686769
	Tested Lubricant	MOBIL SHC 636	MOBIL SHC 636	MOBIL SHC 636	MOBIL SHC 636	MOBIL SHC 636
	Sampled	07 Feb 2024	03 Jun 2024	13 Nov 2024	03 Feb 2025	18 May 2025
	Reported	21 Feb 2024	18 Jun 2024	27 Nov 2024	18 Feb 2025	29 May 2025
	Equipment Age					
	Oil Age					
	Make-up Volume					
	Oil Changed				Yes	
	Filter Changed					
Lubricant	Contamination Rating	Normal	Normal	Normal	Normal	Normal
	Equipment Rating	Normal	Normal	Normal	Normal	Caution
	Lubricant Rating	Normal	Caution	Alert	Alert	Caution
	Visc@40C (cSt)	742.2	773.3	791.6	840.2	754.3
	TAN (mg KOH/g)	0.41	0.40	0.39	0.39	0.39
	Water (Hot Plate)	NotDetected	NotDetected	NotDetected	NotDetected	NotDetected
Wear (ppm)	Ag (Silver)	0	0	0	0	0
	Al (Aluminum)	0	0	0	0	0
	Cr (Chromium)	0	0	0	0	0
	Cu (Copper)	9	12	11	11	44
	Fe (Iron)	1	1	1	1	5
	Mo (Molybdenum)	0	1	0	0	0
	Ni (Nickel)	0	0	0	0	0
	Pb (Lead)	3	4	3	3	12
	Sn (Tin)	1	0	1	1	4
Contaminant (ppm)	K (Potassium)	1	1	0	1	0
	Na (Sodium)	0	0	0	1	0
	Si (Silicon)	7	3	1	3	6
	B (Boron)	0	1	0	0	0
Additive (ppm)	Ba (Barium)	0	0	0	0	0
	Ca (Calcium)	15	31	19	19	109
	Mg (Magnesium)	0	1	0	0	1
	P (Phosphorus)	403	332	274	279	391
	Zn (Zinc)	0	0	1	0	1

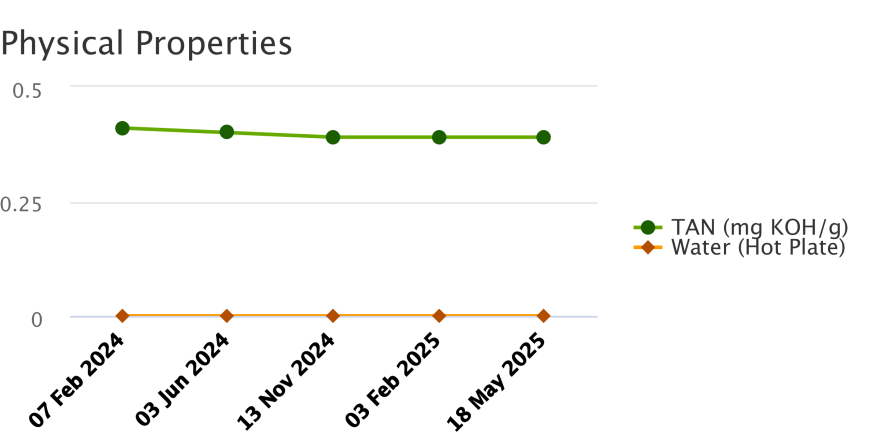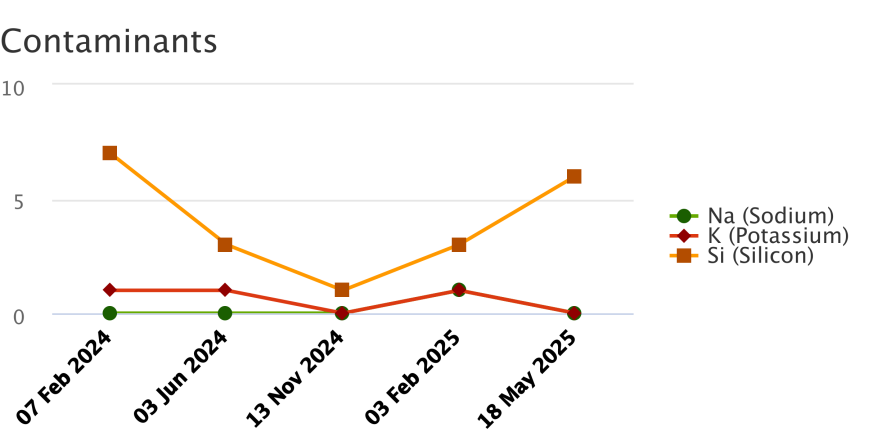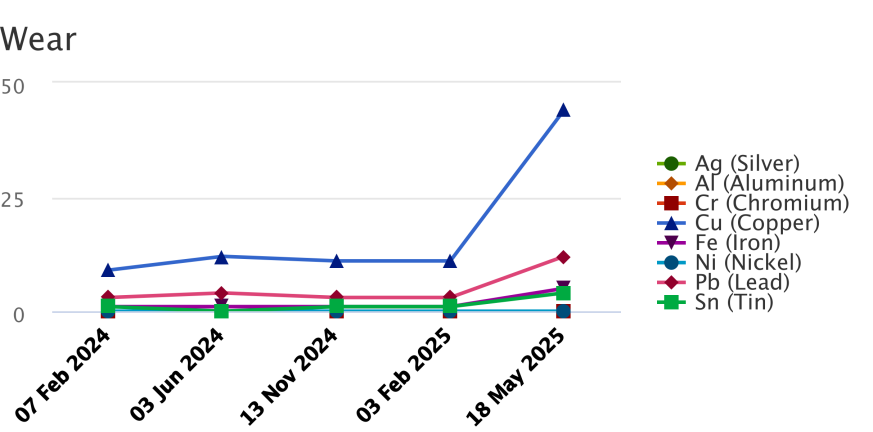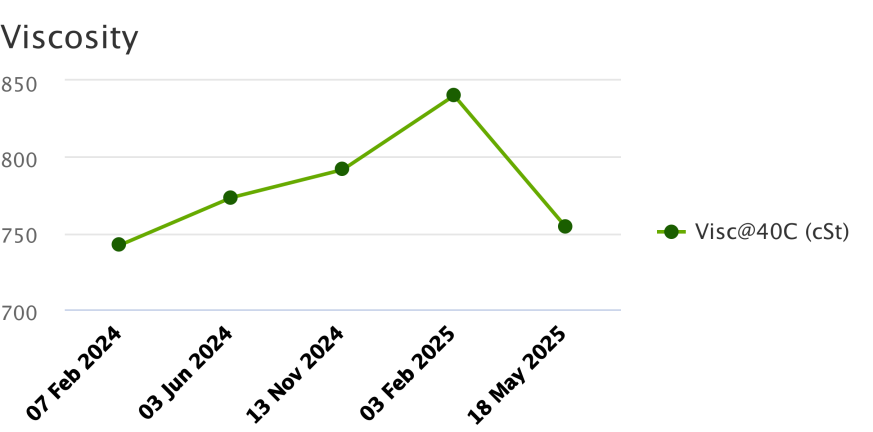

	Caution	
	Unit ID: 4-RK-1	Asset ID: 50074760
	Description: Kiln 2 Drive Trunion Bearing 1	
Account Information	Sample Information	Equipment Information
ID: 402009 Name: Greer Lime Address: 1088 Germany Valley Limestone Road, Riverton, WV 26814-0000 US Parent Account: MATTHEWS LUBRICANTS, INC.	Sample ID: 25147132035 Service Level: Essential Bottle ID: a033686769 Tested Lubricant: MOBIL SHC 636	Asset Class: Circulating System Manufacturer: Model: Lubricant: MOBIL SHC 636
Continued		
Recommendation/Comments		

ACTION REQUIRED - ELEVATED WEAR METALS LEVELS. Determine cause of elevated wear metals levels and take corrective action. If the wear metals levels are elevated for the first time with no history of an increasing trend, then resample immediately to confirm condition. Because silicon levels are not also elevated, abrasive dirt is not the cause of this condition. Possible causes of elevated wear metals include: a. Worn of oil-wetted parts; b. Contamination from previous fill; c. Over-extended oil service life; d. Normal break-in of new equipment. Continue to closely monitor the equipment and oil for signs of further condition regressions. Contact your ExxonMobil representative for further assistance if necessary.

ACTION REQUIRED - ELEVATED OIL VISCOSITY. Determine cause of elevated oil viscosity and take corrective action. Elevated viscosities can interfere with the cooling process of components and restrict oil flow causing oil starvation and component wear. Possible causes of elevated viscosity include: a. Contact with oil that has a higher viscosity; b. High rates of oxidation and oil degradation; c. Excessive sediment; d. Coolant contamination. A partial drain and refill with fresh oil may rejuvenate the oil condition. Change the oil immediately if the condition escalates. Contact your ExxonMobil representative for further assistance if necessary.

Sample Timeline

- 18 May 2025 5:57 PM UTC - Brad Roy - In Service Oil Sample Comments: Photo: