


YS2R6X400E9183544 / VIS, Visibility system / E 32, CUV control unit / CUV1 / L, Lamps / L140, Main beam/dipped beam, left-hand side

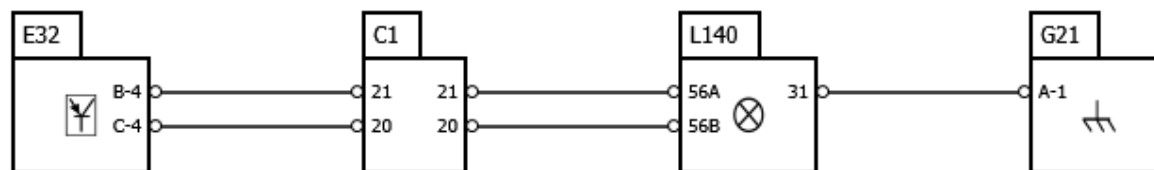

L140, Main beam/dipped beam, left-hand side

## L140, Main beam/dipped beam, left-hand side

Dipped beam and main beam are directly connected to the control unit. If the main beam stops functioning, the dipped beam comes on in its place. If a fault is detected in the left-hand dipped beam, the headlamp levelling motor on the right-hand side will adjust the right-hand headlamp as far downwards as it will go due to internal connection between the dipped beam and the headlamp levelling motor.

The maximum load on the control unit output for dipped beam is 7.5 A. The maximum load on the control unit output for main beam is 6 A.

### Dipped beam LH

Indicates that the control unit output is activated.

### Main beam LH

Indicates that the control unit output is activated.