



# IP Subnetting



## Table of Contents



- Subnetting Basics




# 1

## Subnetting Basics



## Subnetting Basics

- The process of taking an extensive network and splitting into smaller networks is known as subnetting

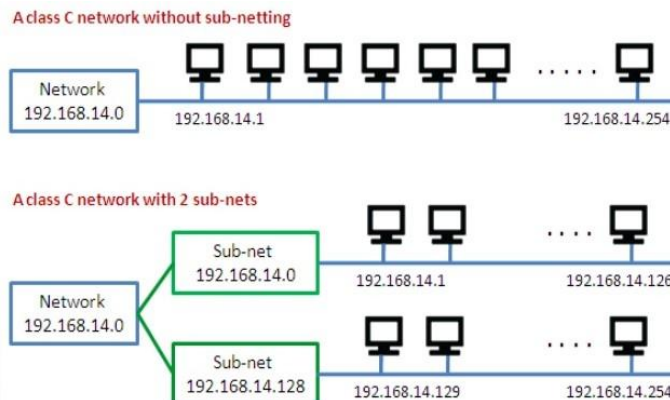



# Subnetting Basics


Why to use subnetting?

- Reduced Network Traffic
- Optimized Network Performance
- Simplified Management - Easier to identify and isolate network problems
- Facilitated Spanning of Large Geographical Distances - Connecting multiple smaller networks makes the system more efficient



# Subnetting Basics

- IPv4 address is divided into network ID and host ID by using octets
- In subnetting we can borrow some bits from host ID to use as subnetwork

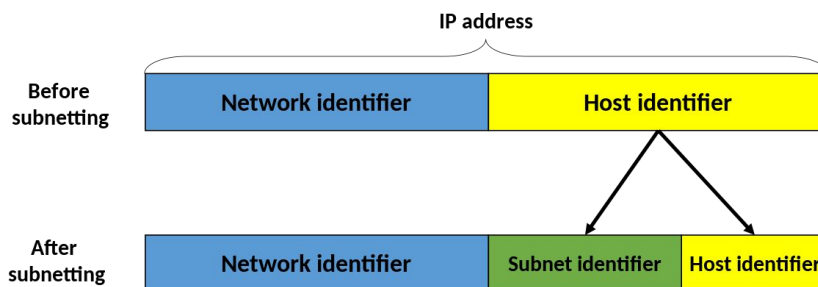



# Subnetting Basics

## Subnetting IPv4 Address:

- A **Class A, B, or C** TCP/IP network can be further divided, or subnetted, by a system administrator
- For example, you have 150 hosts on three networks that are connected by a router
- You are allocated a **Class C** address: 

192.168.123	.0
Network ID	Host ID
- You can use from 

192.168.123	.1
-------------	----

 to 

192.168.123	.254
-------------	------

  
(Just remember that the first and last address in any network or subnet cannot be assigned to any individual host, so you cannot use 192.168.123.0 and 192.168.123.255)



# Subnetting Basics

## Subnetting IPv4 Address:

- With the allocated Class C IP address we can map 254 hosts on one network
- But our 150 hosts are located on **three** separate networks
- Instead of requesting more address blocks for each network, we can divide our block into three subnets

But how?



## Subnetting Basics

### Subnetting IPv4 Address:

- Remember we can create subnets by borrowing bits from Host ID
- We need 3 subnets in total, so if we borrow 1 bit we will get 2 subnets which is not enough
- So we need more bits, if we borrow 2 bits we will get 4 subnets and our subnet mask will be:

11111111.11111111.11111111.11000000 → 255.255.255.192



## Subnetting Basics

### Subnetting IPv4 Address:

- Since we borrowed 2 bits, there are only 6 bits left for Host ID which makes  $2^6 - 2 = 62$  hosts (*first and last numbers are reserved*)
- Our company has **3 networks** and **50 hosts** on each network
- We have **4 subnets**, and **62 host IDs** for each subnet (*that means 1 subnet with 62 host IDs will be reserved for future use*)



## Subnetting Basics

### Subnetting IPv4 Address:

- Using subnet mask 255.255.255.192, our 192.168.123.0 network will become 4 networks:

○ 192.168.123.0	11111111.11111111.11111111.00	000000
○ 192.168.123.64	11111111.11111111.11111111.01	000000
○ 192.168.123.128	11111111.11111111.11111111.10	000000
○ 192.168.123.192	11111111.11111111.11111111.11	000000

- Valid host addresses will be:

192.168.123.1-62                      192.168.123.129-190  
192.168.123.65-126                192.168.123.193-254

*(Remember, again, that binary host addresses with all 1s or all 0s are reserved, so you cannot use addresses with the last octet of 0, 63, 64, 127, 128, 191, 192, and 255)*



## Subnetting Basics

Let's see how this works:

- Assume we have two IP addresses:
  - 192.168.123.71 and 192.168.123.133
- If we used default subnet mask of Class C which is 255.255.255.0 both addresses should be on the same network
- However we use subnet mask of 255.255.255.192 so
  - 192.168.123.71 host will be on the 192.168.123.64 network
  - 192.168.123.133 host will be on the 192.168.123.128 network

Well done!



# Subnetting Basics

## Default gateways


- If a host needs to communicate with a host on another network, it will communicate through a router
- A router specified on a host is called **default gateway**
- So how does TCP/IP knows if the destination host is on the same network or not?



# Subnetting Basics

## Default gateways

When a host wants to communicate with another device, it performs a comparison process using the defined subnet mask with the destination IP address and its own IP address

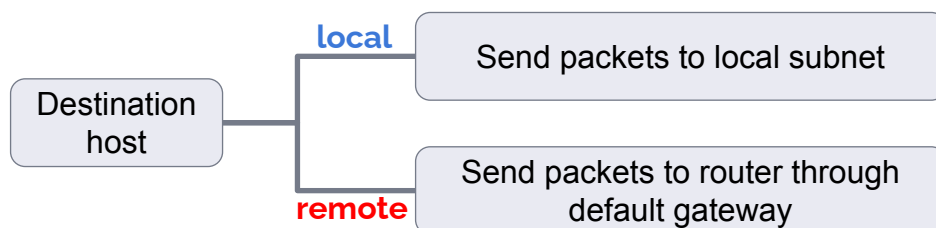



## Subnetting Basics

- Source host : 192.168.123.72
- Subnet mask : 255.255.255.192
- Destination host : 192.168.123.109

Source IP : 11000000.10101000.01111011.01001000  
Subnet mask : 11111111.11111111.11111111.11000000  
Network ID : 11000000.10101000.01111011.01000000 (192.168.123.64)

Logical  
AND

Destination IP : 11000000.10101000.01111011.01101101  
Subnet mask : 11111111.11111111.11111111.11000000  
Network ID : 11000000.10101000.01111011.01000000 (192.168.123.64)

Logical  
AND

Same result! Two hosts are on the same network.



## Subnetting Basics

- Source host : 192.168.123.46
- Subnet mask : 255.255.255.192
- Destination host : 192.168.123.202

Source IP : 11000000.10101000.01111011.00101110  
Subnet mask : 11111111.11111111.11111111.11000000  
Network ID : 11000000.10101000.01111011.00000000 (192.168.123.0)

Logical  
AND

Destination IP : 11000000.10101000.01111011.11001010  
Subnet mask : 11111111.11111111.11111111.11000000  
Network ID : 11000000.10101000.01111011.11000000 (192.168.123.192)

Logical  
AND

Not the same! Two hosts are on different networks.





# Subnetting Basics

## Classless Inter-Domain Routing (CIDR)

- In order to reduce the wastage of IP addresses, a new concept of **CIDR** is introduced
- CIDR provides the flexibility of borrowing bits of Host part of the IP address
- By using subnetting, one single Class A address can be used to have smaller sub-networks which provides better network management capabilities



# Subnetting Basics

- **CIDR** notation examples:

IP address: 192.168.1.142

Subnet mask: 255.255.255.0 or 11111111.11111111.11111111.00000000

CIDR: 192.168.1.142 /24 ← 24 turned on bits (1s)

IP address: 172.16.56.140

Subnet mask: 255.255.255.240 or 11111111.11111111.11111111.11110000

← 28 turned on bits (1s)

CIDR: 172.16.56.140 /28



# THANKS!

## Any questions?

You can find me at:

- ▶ @David - Instructor
- ▶ david@clarusway.com

