Observe. Compare. Request. Verify.

An operations data backbone, with explicit decision and command boundaries.

OBSERVED

10 synthetic source domains

Asset IDs, units, timestamps, ownership and quality.

→

ALTERNATIVES

Frozen what-if branches

15–120 min; queue/resource balances; common demand cases.

→

REVIEW

Do nothing + simple rule

Waiting, served/backlog, cost, constraints and adverse cases.

→

BOUNDED REQUEST

One synthetic executor

Maintenance proposal, expiry, current preconditions and explicit execute.

→

VERIFY

Receipt + readback

Exact work-order identity; accepted workflow does not mean repaired.

SYNTHETIC READ FEEDS

Ride SCADA • ticketing • vision • CMMS • ERP/POS • workforce • BMS • water • weather • GIS

CONTEXT / IMPLEMENTED

OpenUSD + native OVStage/OVRTX; quality-aware live view, replay, saved comparisons and static design queries.


ENTERPRISE / PROPOSED

Vendor read adapters, authenticated CMMS writes, qualified roster evidence and approved signage requests.

FOX-inspired architecture; NVIDIA FOX, NemoClaw and OpenShell are not installed. Spatial queries and weather previews remain separate from the uncalibrated forecast.

An incident can reach a work order directly

Actual Horde L40 app/browser acceptance • verified application release afa84a1

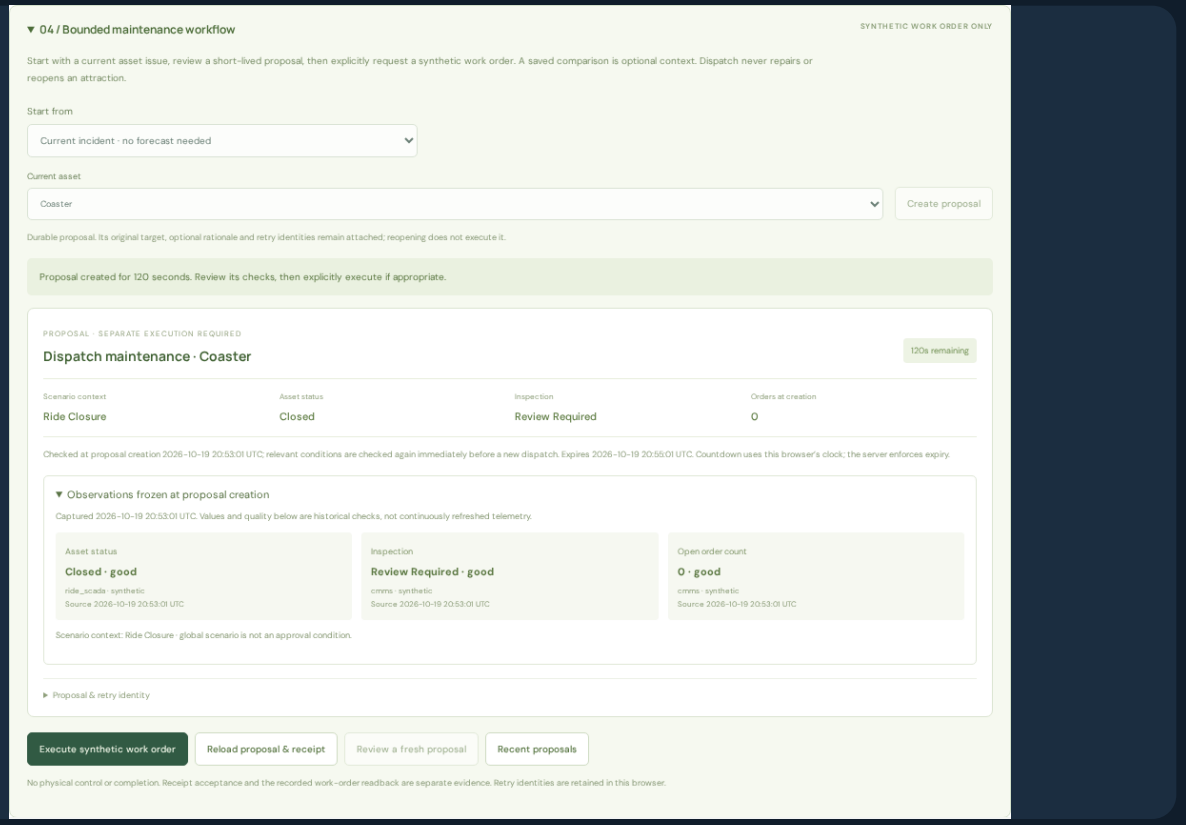

Actual app: frozen source observations

01 Live asset entry selects the target without a write or forecast

02 Explicit direct execution creates an order; ride remains closed

03 Reload retrieves the accepted receipt using GET only

04 Mobile layout fits the viewport

05 Saved-comparison workflow still functions

06 Lost response + reload retries the same request and expiry

4 scripted steps instead of 7 via a saved comparison. This is a UI path comparison, not a measured human productivity gain.

Current status, inspection and open orders are frozen with source evidence. Dispatch accepts a synthetic workflow; it does not repair equipment or reopen a ride.

Does the dining connection fix access?

Matched native OVStage/OVRTX captures • same camera • separate authored design layer

BASELINE: unreachable in authored graph



Close connector → unreachable

Step-free filter → unreachable; entry threshold unresolved

DINING DESIGN: 40.852 m route in the graph



34.04 s assumes 1.2 m/s; no density or queue delay

Static geometry and a partial authored graph. This is not certified accessibility, physical guest guidance, spare service capacity or forecast validation.

A useful test can reject the cleverer policy

Independent policy accounting • 324 synthetic cases • 972 outcomes • source d3dca3d

216 / 324

Planner and simple rule choose identical schedules

108

Different choices: extra staff costs EUR56 per case

52 / 108

Extra staff produces no waiting improvement

92 / 324

Doing nothing strictly dominates the planner choice

Across all cases: +1.701 completed service visits, −28.883 guest-min waiting and +EUR18.667 labor versus the simple rule. Different-choice subgroup: +5.102 visits, −86.648 guest-min and +EUR56. These are grid averages, not expected real outcomes.

Local checkpoint: 407 CPU/application checks passed; three browser modules skipped there. Separate browser environment: 40 checks passed. Actual GPU incident walkthrough: six checks. Scopes and revisions differ; these are not one combined production qualification.

The evaluator omits minimum-coverage constraints, donor depletion/setup loss and replenishment cost. Doing nothing is not advice to understaff. No measured ROI or real park productivity claim.

A narrow pilot can answer the value question

Start with one ride, its maintenance process and one duty-manager workflow.

1 / Establish evidence

Map OEM/CMMS asset IDs, timestamps, inspection states and actual work-order history. Read-only integration first.

2 / Measure the task

Compare alert-to-verified-order time, clicks, incorrect/duplicate orders and operator understanding against today's workflow.

3 / Test decisions

Calibrate arrivals, service, staffing qualifications, delivery delays and cost. Keep do-nothing and simple-rule baselines.

4 / Expand deliberately

Only then add a scoped authenticated CMMS request; validate path geometry before coupling guest movement to forecasts.

Reconciled sampled run evidence

Elapsed ≥8h + adequate schedule coverage; 1 failed checks/samples retained.

FIXED API / 1 observed deployment(s)
Start 2026-10-19T19:47:34+00:00 End 2026-10-20T03:47:34+00:00
8.000 h elapsed · 96 cycles/samples · 0 failures
Cadence 300 s; uncovered 19.438 s / max 0.591 s
Cycle/sample windows 7.995 h; recorded pauses 0.000 s
Health-only windows 0.000 s; identities verified/unverified/unknown: 1/0/0
Last observed source d3dca3d; full gaps and transitions in manifest

GPU OBSERVER / 4 observed deployment(s)
Start 2026-10-19T19:47:33+00:00 End 2026-10-20T03:47:33+00:00
8.000 h elapsed · 960 cycles/samples · 1 failures
Cadence 30 s; uncovered 8.692 s / max 0.010 s
Cycle/sample windows 7.998 h; recorded pauses 0.000 s
Health-only windows 0.000 s; identities verified/unverified/unknown: 4/0/0
Last observed source afa84a1; full gaps and transitions in manifest

Schedule windows + fixed 2 s allowance are not continuous uptime. Pauses are health-only; GPU request duration is unknown.

Next success criterion: a verified operational outcome that an operator values, with measured effort, error rates and clear limits.