


Scale 1:5. First angle: the view from the right is drawn to the left of the front, the view from above under it. A-A: the section on sheet 2.



FROM THE RIGHT

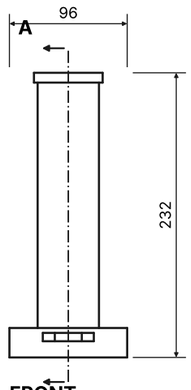

FRONT



FROM ABOVE

General arrangement


EARFcoin request column: A coin column for song requests, at the decks

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

ECC-001 rev A

Scale 1:2. Section A-A (sheet 1): the product cut at x 0.0 and seen from the right; cut faces hatched, a different angle for each part.

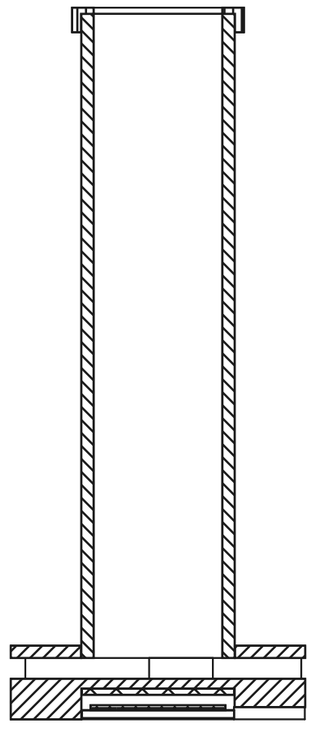


Section A-A

EARFcoin request column: A coin column for song requests, at the decks

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

Scale 1:2, parts drawn apart. Balloons are the parts list's numbers (last sheet).

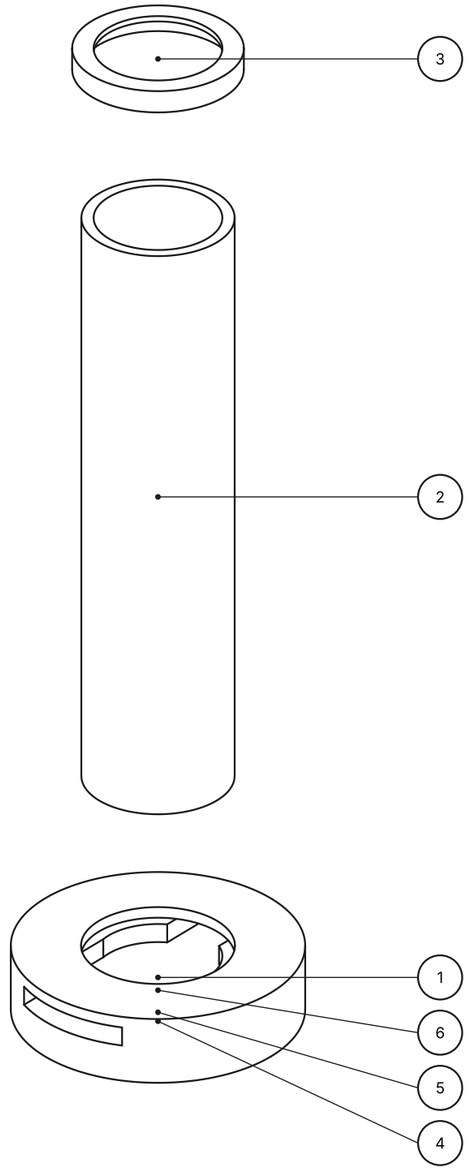

Exploded view

EARFcoin request column: A coin column for song requests, at the decks


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

1. base: cnc-mill, cast-acrylic; 124 cm3 each; 1 for the set; 1:2


turned and milled from 25 mm Smoke cast acrylic (24 finished), all faces polished; the socket 4 deep takes the tube; the slot 6.8 tall lets one coin out at the front; the notch at the back takes a finger to push it; from below, a 50 pocket 10 deep for the light (3.2 of Smoke left as its window under the coins) and a 7 × 4 channel for its cable, out at the back



FRONT




FROM THE RIGHT

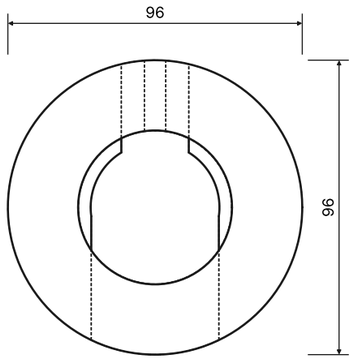


FROM ABOVE

2. tube: lathe, cast-acrylic; 121 cm3 each; 1 for the set; 1:5


cast acrylic tube 50 × 4 wall (42 bore: 1 mm round a 40 coin), water-clear, cut square and its ends polished; bonded into the base's socket (Acrifix 1R 0192 or Weld-On 16); 210 long holds 33 coins; the back half of its bore bead-blasted (masked along two lines 180 apart): lit from its foot, it glows behind the queue



FRONT



FROM THE RIGHT



FROM ABOVE

Printed and machined parts

EARFcoin request column: A coin column for song requests, at the decks


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

3. ring: lathe, brass; 5 cm3 each; 1 for the set; 1:1


brass, satin: a cap ring over the tube's top, bonded; the coins drop in through it



FRONT




FROM THE RIGHT

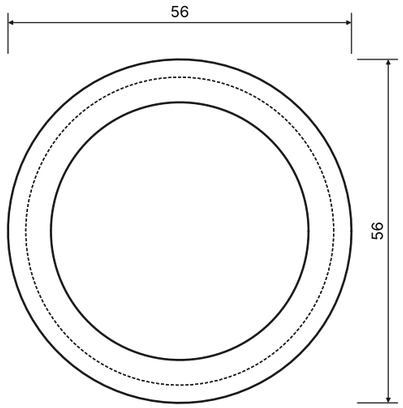


FROM ABOVE

4. plate: lathe, aluminium; 5 cm3 each; 1 for the set; 1:1


aluminium 3 thick, the LED disc bonded to it with thermal tape; held in the pocket by three M3 screws into brass inserts; the cable through a grommet into the channel



FRONT



FROM THE RIGHT

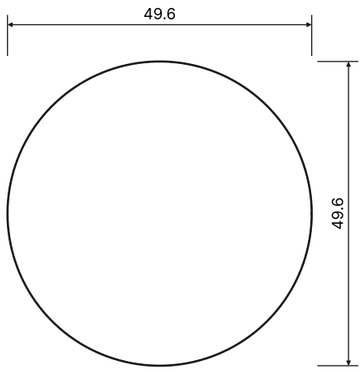

FROM ABOVE

Printed and machined parts

EARFcoin request column: A coin column for song requests, at the decks


mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15


Three views each, hidden edges dashed; STL and STEP files in stl/ and step/. Numbers are the parts list's.

6. diffuser: lathe, cast-acrylic; 4 cm3 each; 1 for the set; 1:1


opal cast acrylic 2 thick, bonded under the window: no hot spot under the coins



FRONT



FROM THE RIGHT

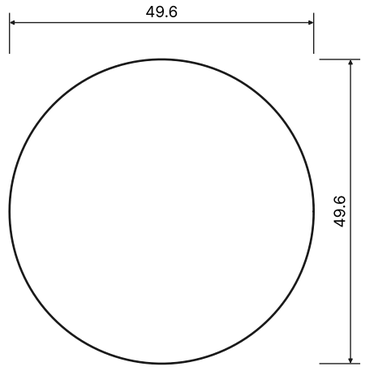

FROM ABOVE

Printed and machined parts

EARFcoin request column: A coin column for song requests, at the decks

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15

For 1; prices are budgets (bom.md says where each comes from).

no.	item	make	qty	what	size	each USD
1	base	cnc-mill	1	Cast acrylic tube, tinted through	106 × 106 × 34	170.28
2	tube	lathe	1	Cast acrylic tube, tinted through	60 × 60 × 220	96.68
3	ring	lathe	1	Brass C360	66 × 66 × 18	54.41
4	plate	lathe	1	Aluminium 6061	60 × 60 × 13	46.12
5	led	buy	1	any (a COB or SMD round board) A 44 mm round LED board, 2700 K, CRI 90, about 1.5 W at 5 V (USB), with its constant-current driver on the board		9.00
6	diffuser	lathe	1	Cast acrylic tube, tinted through	60 × 60 × 12	46.70
7	cable	buy	1	A 2 m USB-C to bare-lead cable with an inline rotary dimmer, black, and a 5 V 2 A USB-C adapter		14.00
8	feet	buy	1	Four clear polyurethane bumpers, 10 × 2, under the column's base		0.40

Notes

1. Coins handed over with a request drop in at the top and stack; the queue shows as a column of colours. To play the next: a finger through the notch at the back pushes the lowest coin out of the slot at the front, and the stack drops one.
2. The slot is 6.8 tall, so one 6 mm coin passes and the next is held by the tube's wall; the tube holds 33.
3. The tube is bonded into the base's socket and the ring onto the tube (Acrifix 1R 0192 or Weld-On 16 for the acrylic, a clear epoxy for the brass).
4. The light: a 2700 K LED disc, 44 across, about 1.5 W at 5 V, on an aluminium plate in a pocket under the base, under an opal diffuser and a 3.2 mm window of the Smoke; it shines up through the queue so the coins glow in their tints. Power from USB-C (any 5 V adapter), the cable out of a channel at the back with an inline dimmer. Low voltage, so no listing beyond the adapter's own.

Parts list and notes

EARFcoin request column: A coin column for song requests, at the decks

mm | issue 2026-10-20 | first angle

Tolerances: sheet parts ±0.5, pockets ±0.2, holes +0.2/0, prints ±0.15