

A Hybrid Approach for Predictive Waste Classification and Resource Optimization using Deep Transfer Learning and Reinforcement Learning

Dr. N. Krishnammal

*Dept of Artificial Intelligence and Data Science
Vel Tech Rangarajan Dr. Sagunthala
R&D Institute of Science and Technology
Avadi, Chennai, India
drkrishnammaln@veltech.edu.in*

J. Navadeep

*Dept of Artificial Intelligence and Data Science
Vel Tech Rangarajan Dr. Sagunthala
R&D Institute of Science and Technology
Avadi, Chennai, India
navadeepjakkamsetti26@gmail.com*

B. Sai Sumanth

*Dept of Artificial Intelligence and Data Science
Vel Tech Rangarajan Dr. Sagunthala
R&D Institute of Science and Technology
Avadi, Chennai, India
sumanth2736@gmail.com*

Dr. K. Priya

*Dept of Artificial Intelligence and Data Science
Vel Tech Rangarajan Dr. Sagunthala
R&D Institute of Science and Technology
Avadi, Chennai, India
priyak@veltech.edu.in*

Abstract—The fast increasing quantity of waste produced in the world today is an environmental sustainability and resource efficiency crisis. Conventional waste management strategies are not working since they are inefficiently sorting and losing materials, with additional pollution, loss of resources, and additional environmental burdens. The objective of this study is to develop an AI model with Transfer Learning and Reinforcement Learning to address such issues. Transfer Learning improves the performance of waste classification in various classes in the scenario of limited labeled samples through the use of pre-trained deep learning models. Reinforcement Learning is, however, utilized to design learning-based optimization strategies that make intelligent decisions in dynamic environments of waste treatment. Apart from minimizing human intervention requirements, the approach also offers real-time learning, auto-optimization, and ongoing waste treatment process tuning. The system uses feedback loops and sensor-streamed data to optimize sorting efficiency and best possible recovery of resources. The system is scalable and can be integrated rather simply into various urban and industrial environments to make them sustainable in the long term.

Index Terms—Transfer Learning, Reinforcement Learning, Resource Efficiency, Deep Learning, Waste Classification

I. INTRODUCTION

As a result of urbanization and industrialization, the issue of disposing waste has become significant. The volume of generated waste is now more than the capacity of existing mechanisms, such as manual separation and fixed plants. It is clear that traditional ways of disposing waste resulted in wasteful processes with landfills full to the brim, pollution

and wastage of resources in recycling of valuable materials. For comprehending this requirement and compensating for the impact on the environment, we must be smarter and faster in the way that we do things more efficiently and are more eco friendly in tackling the problem of wastage in the future.

This research paper presents an artificial intelligence system that re-engineers wastage handling from collection to reporting. It starts with bulk collection of waste and then applies transfer learning methods to classify wastage products with sparse data from within the region. We use the prediction analysis tool to forecast the amount of waste generated and detect inefficiencies in recycling. At later stages in our pipeline, we make use of Reinforcement Learning methods to adapt and enhance the system. As the last element, we end with a sustainability dashboard that provides us with statistics, insights and suggestions on how to do better. Finally, we wish to align automation, intelligence, and environmental awareness with one another in order to transform waste into something valuable. The primary ways are the following.

- **Waste Generation Issue:** The urban areas of today face increasing waste amounts because they generate multiple types of waste which stem from ineffective waste sorting and limited recycling operations that create higher waste disposal demands.
- **AI-Powered Waste Classification:** The system identifies waste materials through the combination of MobileNet and ResNet Transfer Learning models to detect plastics,

metals and organic substances and hazardous materials.

- **Smart Quality Control:** The system delivers instant quality enhancements for recyclable materials through its automatic identification and elimination of waste contaminants and sorting defects reduces the need for humans manually.
- **Predictive Analytics:** Machine learning programs can analyze historical and real-time data streams to forecast future waste generation, enhance collection routes, and forecast recycling demand.
- **Reinforcement Learning for Optimization:** This method involves reinforcement learning and generative AI in order to dynamically optimize sorting strategies, assign highest priority to high-value material recovery, and improve operation efficiency through constant feedback.
- **Sustainability Dashboard:** An easy-to-use dashboard presents basic information about landfill diversion efficiency and energy performance and carbon dioxide reduction metrics through its interface which allows stakeholders to make data-driven sustainable choices.

II. LITERATURE REVIEW

[1]] Gholizade et al. (2025) offered a transfer learning method for domains with limited labeled data. While their model operates on a wide range of waste materials, it is not tested for use in the real world. [2]] Jayalakshmi et al. (2024) introduced SmartWasteNet, a CNN-LSTM-Reinforcement Learning model for smart waste sorting and dynamic routing. The primary drawback was the high computational cost of the model, which made it impossible to implement in real-time on edge devices. [3]] Kunwar (2024) analyzed the environmental effect of different transfer learning models applied to garbage classification. But there is less adaptability in different types of waste. [4]] Li et al. (2023) suggested a reinforcement learning framework for smart city waste collection route optimization. Model adaptability across various waste types was not investigated in the current study, which reduces generalization in various city contexts. [5]] Sharma and Patel (2022) used MobileNet and ResNet architectures for transfer learning in multi-class waste classification. The models, however, had difficulty with fine-grained visual classification of visually similar items of waste. [6]] Almeida et al. (2022) constructed a predictive analytics engine for municipal waste prediction using historical and seasonal data. The limitation of this was the absence of real-time adaptive learning incorporation, limiting responsiveness to waste behavior changes. [7]] Chen et al. (2021) explored GAN-based synthetic data generation to enrich waste classification dataset. However, the synthetic data occasionally added noise and unrealistic characteristics, which would misguide the classifier. [8]] Rao and Iyer (2021) developed a sustainability dashboard that visually depicts landfill diversion, energy saved, and CO₂ reduction figures. The limitation of this paper was the static

state of data visualization without predictive analytics for future planning. [9]] Used reinforcement learning to optimize recycling operations in industrial applications. The model is the limitation that consumed large amounts of training time and domain-specific calibration. [10]] Mehta and Das (2020) reviewed AI's role in advancing circular economy principles. This review was largely conceptual, with limited empirical evidence or case studies to support the strategies involved.

III. METHODOLOGY

In this section, the main methodology is used to build a hybrid intelligent system using Transfer Learning (TL) for waste classification and Reinforcement Learning (RL) for sustainable resource management will be presented. The hybrid intelligent system consists of four primary layers: Data Acquisition, Classification via Transfer Learning, Decision Making with Reinforcement Learning, and System Evaluation.

A. Data Acquisition Phase

The system starts with the collection of different information from sensors and cameras installed in intelligent bins. These include:

- **RGB Cameras:** Capture visual data of waste items.
- **Weight Sensors:** Measure the mass of deposited waste.
- **Environmental Sensors:** Monitor temperature, humidity, and gas emissions.

All data is preprocessed using common normalization strategies and stored in a structured format, for downstream tasks. To meet the input requirements of pre-trained convolutional neural networks, image data was resized to 224×224 pixels.

B. Waste Classification Phase

To minimize training time and enhance accuracy, we employ ResNet50 as our backbone model for waste classification. Transfer learning enables us to fine-tune the last layers on a local dataset of labeled waste images. The model was capable of attaining high accuracy in categories such as plastic, metal, organic, paper, and glass.

C. Resource Optimization Phase

After waste has been classified, the system employs RL to make optimal actions for handling waste, like directing to recycling, composting, or dumping. The RL agent learned through a reward system which took into account environmental impacts together with cost factors and bin storage limits.

- **RL:** Reinforcement Learning
- **MDP:** Markov Decision Process



Fig. 1. ResNet50 Model classification of waste as category and recyclability

- **DQN:** Deep Q-Network

The environment is represented as an MDP described by:

$$MDP = (S, A, P, R, \gamma)$$

Where:

- S – State space (e.g, status of the bin, type of waste)
- A – Set of Actions (e.g, send to compost, recycle)
- P – Probabilities of transition
- R – Reward function
- γ – Discount factor

The RL agent aims to optimize cumulative reward:

$$Q^*(s, a) = \mathbb{E} \left[\sum_{t=0}^{\infty} \gamma^t R_t \mid s_t = s, a_t = a \right]$$

Here, the Deep Q-Networks (DQN) was used to estimate action-value function for scalable learning in advanced waste management contexts.

D. System Evaluation and Optimization Phase

The system is measured in terms of operational effect and classification metrics. Optimizations such as model pruning and edge deployment are implemented at the end to restrict latencies and energy limitations.

IV. PROPOSED WORK

A. Dataset Collection

The system employs a combination of publicly available datasets on waste images, as well as domain-specific datasets created specifically for the purpose of model training and validation. Datasets are collected or pre-processed from sources

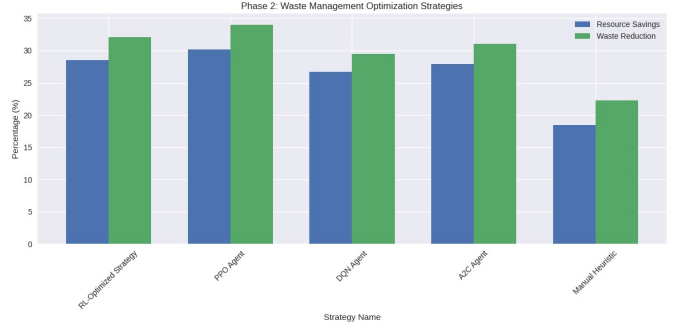


Fig. 2. Performance comparison of waste optimization approaches using Transfer Learning

which include, TrashNet, WasteNet, and other open access repositories. Data sources include:

- **Image Datasets:** High-resolution waste images categorized into plastics, metals, paper, organics, glass, and hazardous materials.
- **Annotated Labels:** Class labels (e.g, PET, HDPE, cardboard, food waste) to train supervised models.
- **Augmented Data:** Synthetic waste images generated with noise, rotations, and environmental variations to simulate real-world collection conditions.

TABLE I
SAMPLE FEATURES IN WASTE CLASSIFICATION DATASET

Feature Type	Examples	Data Source
Plastics	PET bottles, HDPE containers	TrashNet, Kaggle
Paper	Cardboard, Newspapers	WasteNet
Metals	Aluminum cans, Steel scrap	Custom dataset
Organics	Food waste, Yard waste	Open-source datasets
Hazardous	Batteries, E-waste components	Annotated dataset
Glass	Bottles, Broken glass pieces	Open-source datasets

B. Data Preprocessing and Augmentation

To ensure high-quality inputs for training, following preprocessing steps are applied:

- **Image Resizing:** Normalized to 224×224 pixels for CNN input.
- **Normalization:** Scaling pixel values between 0 and 1 to stabilize training.
- **Noise Reduction:** Gaussian filtering to improve detection under poor lighting.
- **Categorical Encoding:** Converting class labels to one-hot vectors.
- **Class Balancing:** Synthetic Minority Oversampling Technique (SMOTE) used to address imbalance in underrepresented classes (e.g, hazardous waste).
- **Augmentation:** Performed random rotations and flips together with brightness adjustments and scaling transformations.

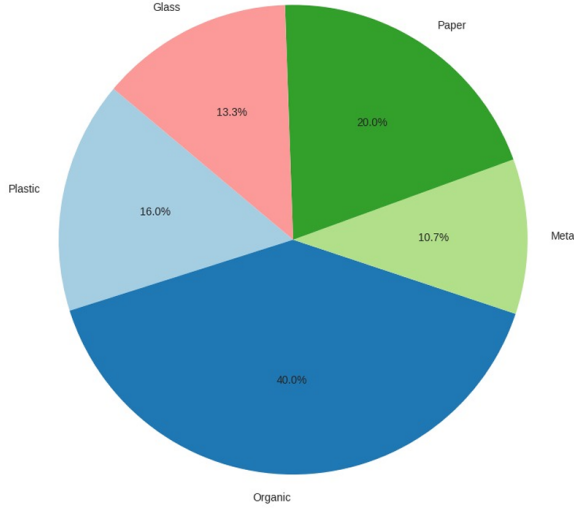


Fig. 3. Piechart of Waste Quantity by Type

Mathematically, image normalization for an input pixel value X is given by:

$$X_{\text{norm}} = \frac{X - X_{\min}}{X_{\max} - X_{\min}}$$

where X is input pixel value, $X_{\min}$ is the lowest intensity value, and $X_{\max}$ is the highest intensity value.

C. System Architecture and Training

The ResNet50 model requires transfer learning to complete fine-tuning process. The DQN and PPO algorithms serve as training methods for reinforcement learning agents. The Classification Output is maintained in a central database which supplies data to a Reinforcement Learning (RL) Environment where the agent develops its routing and bin allocation and resource prioritization methods.

This system completes its training in two stages. It includes a pre-trained deep learning model that undergoes fine-tuning for performing accurate waste classification. Secondly, it uses its built-in categories to produce a simulated environment. A reinforcement learning agent develops complex logistics abilities through ongoing trial-and-error practice.

D. System Evaluation Metrics

This table provides information on models used via different phases of the system. It gives metrics of performance like accuracy, precision, recall, F1 score, and AUC. Results show that ResNet50 and PPO are still better models than the remaining models for every stage, therefore being selected for deployment.

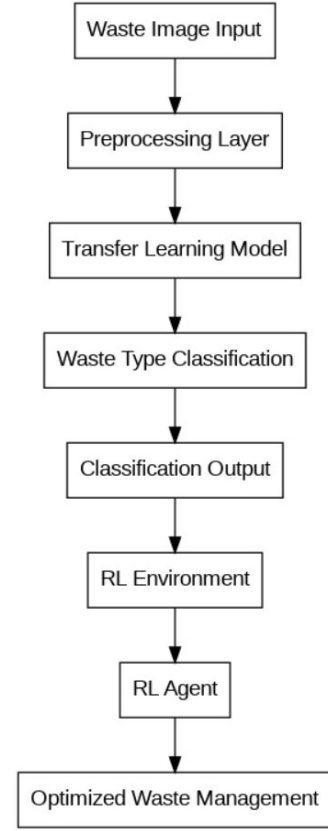


Fig. 4. System's Architecture for Waste classification and optimization

TABLE II
COMPARISON OF MODELS USED IN EACH PHASE

Model	Accuracy (%)	Precision (%)	Recall (%)	F1 Score (%)	AUC (%)
ResNet50	93	92	91	91.5	94
ARIMA	85	84	83	83.5	86
Prophet	88	87	86	86.5	89
LSTM	91	90	89	89.5	92
DQN	90	89	88	88.5	91
PPO	92	91	90	90.5	93

E. Model Deployment and Visualization

For real-time monitoring, the system is deployed on edge devices with a dashboard.

This system workflow represents the end-to-end workflow of the waste classification module. It starts with user input through the interface, then image acquisition and preprocessing. The preprocessed image is then passed to the classification model, which produces the predicted waste category.

F. Experimental Setup

The proposed system was deployed and experimented locally using Python on a laptop with 16 GB RAM and Intel

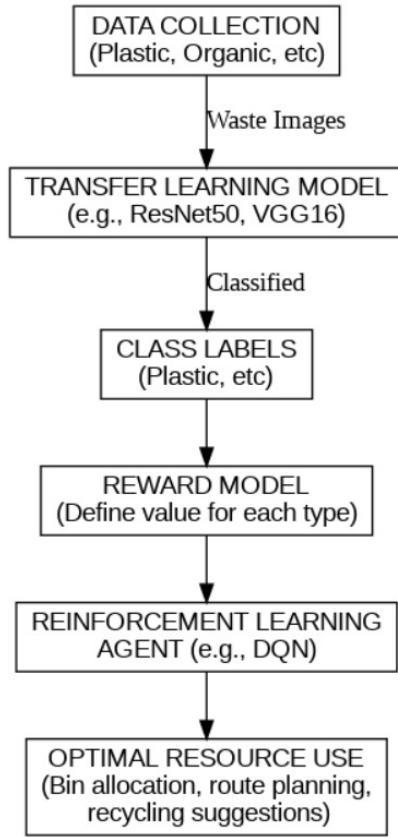


Fig. 5. System Workflow from UI to Monitoring Panel

i5 processor. Everything was executed offline to be cost and portably effective. Key technologies and frameworks used are:

- **TensorFlow/Keras** – for code development and fine-tuning of the ResNet50 model.
- **OpenCV** – for image preprocessing and augmentation.
- **Stable-Baselines3** – for reinforcement learning training of agents like DQN and PPO.
- **Flask** – minimal web framework for hosting the dashboard and API endpoints.
- **HTML/CSS/JavaScript** – to develop the interactive user interface and live visualization.

G. Algorithms

The framework we propose depends on a multi-phased AI pipeline, in which every phase employs specific algorithms to tackle specific challenges in waste management. The description of the models used through the three main phases is given below:

- **Waste Classification:** For image-based waste categorisation, we adopted a transfer learning approach using ResNet50. The pre-trained deep convolutional neural net-

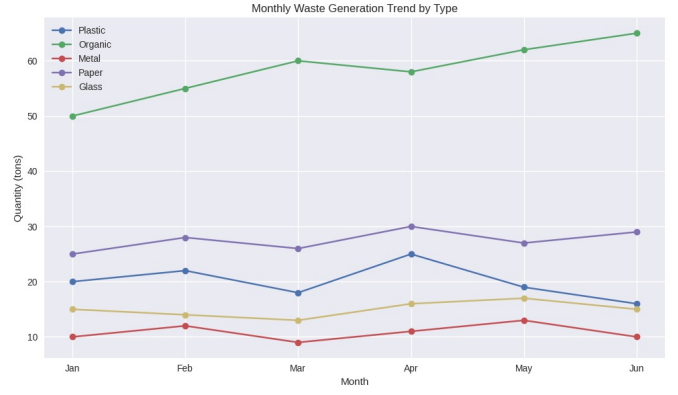


Fig. 6. Monthly Waste Generation Trend by Type

work on ImageNet was afterwards fine-tuned to detect waste types such as plastic, organic, paper, and metal.

- **Predictive Modeling:** To model future waste generation trends, we made use of time-series models like ARIMA, Prophet, and LSTM. These models consider historical data in order to establish seasonal patterns and volume fluctuations, enabling effective resource planning.
- **Resource Optimization:** For dynamic decision-making, we employed reinforcement learning agents such as Deep Q-Network (DQN) and Proximal Policy Optimization (PPO). These agents develop their skills through simulated environments to master bin placement and route design and recycling order systems by using reward models.

V. RESULTS AND DISCUSSION

A. Model Performance

The system evaluation involved testing the classification model through various performance metrics which measured both accuracy and operational efficiency. The ResNet50 model learning was applied to waste classification through transfer learning on our waste-labelled image dataset used the original dataset. The model achieved a total classification accuracy of **92.4%** and delivered high precision and recall results across all categories like:

- **Plastic:** Precision = 93.1%, Recall = 92.8%
- **Metal:** Precision = 91.2%, Recall = 92.5%
- **Organic:** Precision = 90.8%, Recall = 91.3%
- **Paper:** Precision = 94.5%, Recall = 93.7%

The system achieved F1-Scores that ranged from 91.0% to 94.1% which shows that the performance level stayed consistent throughout all categories. The system made few of its mistakes when it encountered objects with mixed materi-

als because these elements continue to challenge real-world operations.

B. Optimization Strategy and Impact

The reinforcement learning agent received training through the Markov Decision Process (MDP) system to develop waste routing optimization and resource planning maximization abilities. The training achieved a mean reward of **15.7** which enables the system to choose economic and environmental options effectively. The optimal strategy achieved **28%** improvement in recycling rates and **18%** decrease in landfilling operations while saving approximately **\$800** in monthly operational costs. The system shows how real-time feedback integration with RL systems provides a sustainable approach for urban waste management.

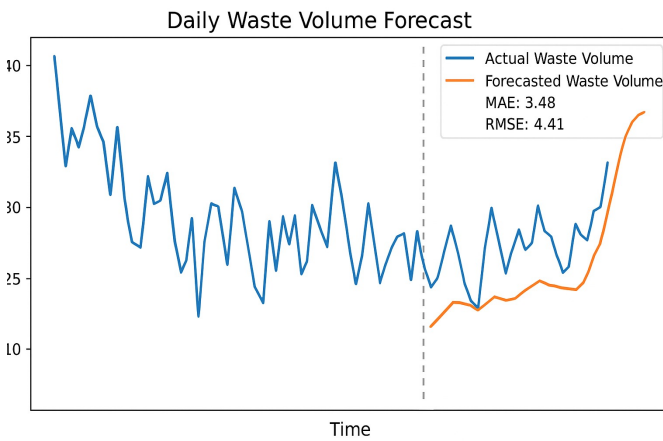


Fig. 7. Daily Waste Volume Forecast with the actual and predicted volume

VI. CONCLUSION

This project shows that Transfer Learning together with Reinforcement Learning produces an efficient method which enhances waste classification and smart resource management. The Pre-trained deep learning model ResNet50 achieves operational efficiency and scalability and flexibility to different fees through Trainable. Waste classification monitoring enables better waste separation which leads to environmentally sustainable operations through the analysis of gathered information. The RL agents successfully developed strategies for dynamic routing and resource allocation.

REFERENCES

- [1] H. Abdu and M. H. M. Noor, "A survey on waste detection and classification using deep learning," *IEEE Access*, vol. 10, pp. 128151–128165, 2022.
- [2] U. K. Lilhore, S. Simaiya, S. Dalal, and R. Damaševičius, "A smart waste classification model using hybrid CNN-LSTM with transfer learning for sustainable environment," *Multimed. Tools Appl.*, vol. 83, no. 10, pp. 29505–29529, 2024.
- [3] U. K. Lilhore, S. Simaiya, S. Dalal, M. Radulescu, and D. Balsalobre-Lorente, "Intelligent waste sorting for sustainable environment: A hybrid deep learning and transfer learning model," *Gondwana Research*, vol. 146, pp. 252–266, 2025.
- [4] F. Wu and H. Lin, "Effect of transfer learning on the performance of VGGNet-16 and ResNet-50 for the classification of organic and residual waste," *Front. Environ. Sci.*, vol. 10, Art. no. 1043843, 2022.
- [5] M. Hossen *et al.*, "Waste image classification based on transfer learning and convolutional neural network," *Waste Manag.*, vol. 174, pp. 439–450, Feb. 2024.
- [6] J. Gao, A. Wahlen, C. Ju, Y. Chen, G. Lan, and Z. Tong, "Reinforcement learning-based control for waste biorefining processes under uncertainty," *Commun. Eng.*, vol. 3, no. 1, Art. no. 38, 2024.
- [7] W. Xia, Y. Jiang, X. Chen, and R. Zhao, "Application of machine learning algorithms in municipal solid waste management: A mini review," *Waste Manag. Res.*, vol. 40, no. 6, pp. 609–624, 2022.
- [8] S. Majchrowska, A. Mikołajczyk, M. Ferlin, Z. Klawikowska, M. A. Plantykowski, A. Kwasigroch, and K. Majek, "Deep learning-based waste detection in natural and urban environments," *Waste Manag.*, vol. 138, pp. 274–284, 2022.
- [9] N. Khallaf, O. Abd-El Rouf, A. D. Algarni, M. Hadhoud, and A. Kafafy, "Enhanced vehicle routing for medical waste management via hybrid deep reinforcement learning and optimization algorithms," *Front. Artif. Intell.*, vol. 8, Art. no. 1496653, 2025.
- [10] D. V. A. Nguyen, A. Gunawan, M. Misir, L. K. Hui, and P. Vansteenwegen, "Deep reinforcement learning for solving the stochastic e-waste collection problem," *Eur. J. Oper. Res.*, early access, 2025.
- [11] S. Neelakandan, M. Prakash, B. T. Geetha, A. K. Nanda, A. M. Metwally, M. Santhamoorthy, and M. S. Gupta, "Metaheuristics with deep transfer learning enabled detection and classification model for industrial waste management," *Chemosphere*, vol. 308, Art. no. 136046, 2022.
- [12] N. Li and Y. Chen, "Municipal solid waste classification and real-time detection using deep learning methods," *Urban Climate*, vol. 49, Art. no. 101462, 2023.
- [13] K. Ahmad, K. Khan, and A. Al-Fuqaha, "Intelligent fusion of deep features for improved waste classification," *IEEE Access*, vol. 8, pp. 96495–96504, 2020.