

A

B

C


D


A

B

C

D

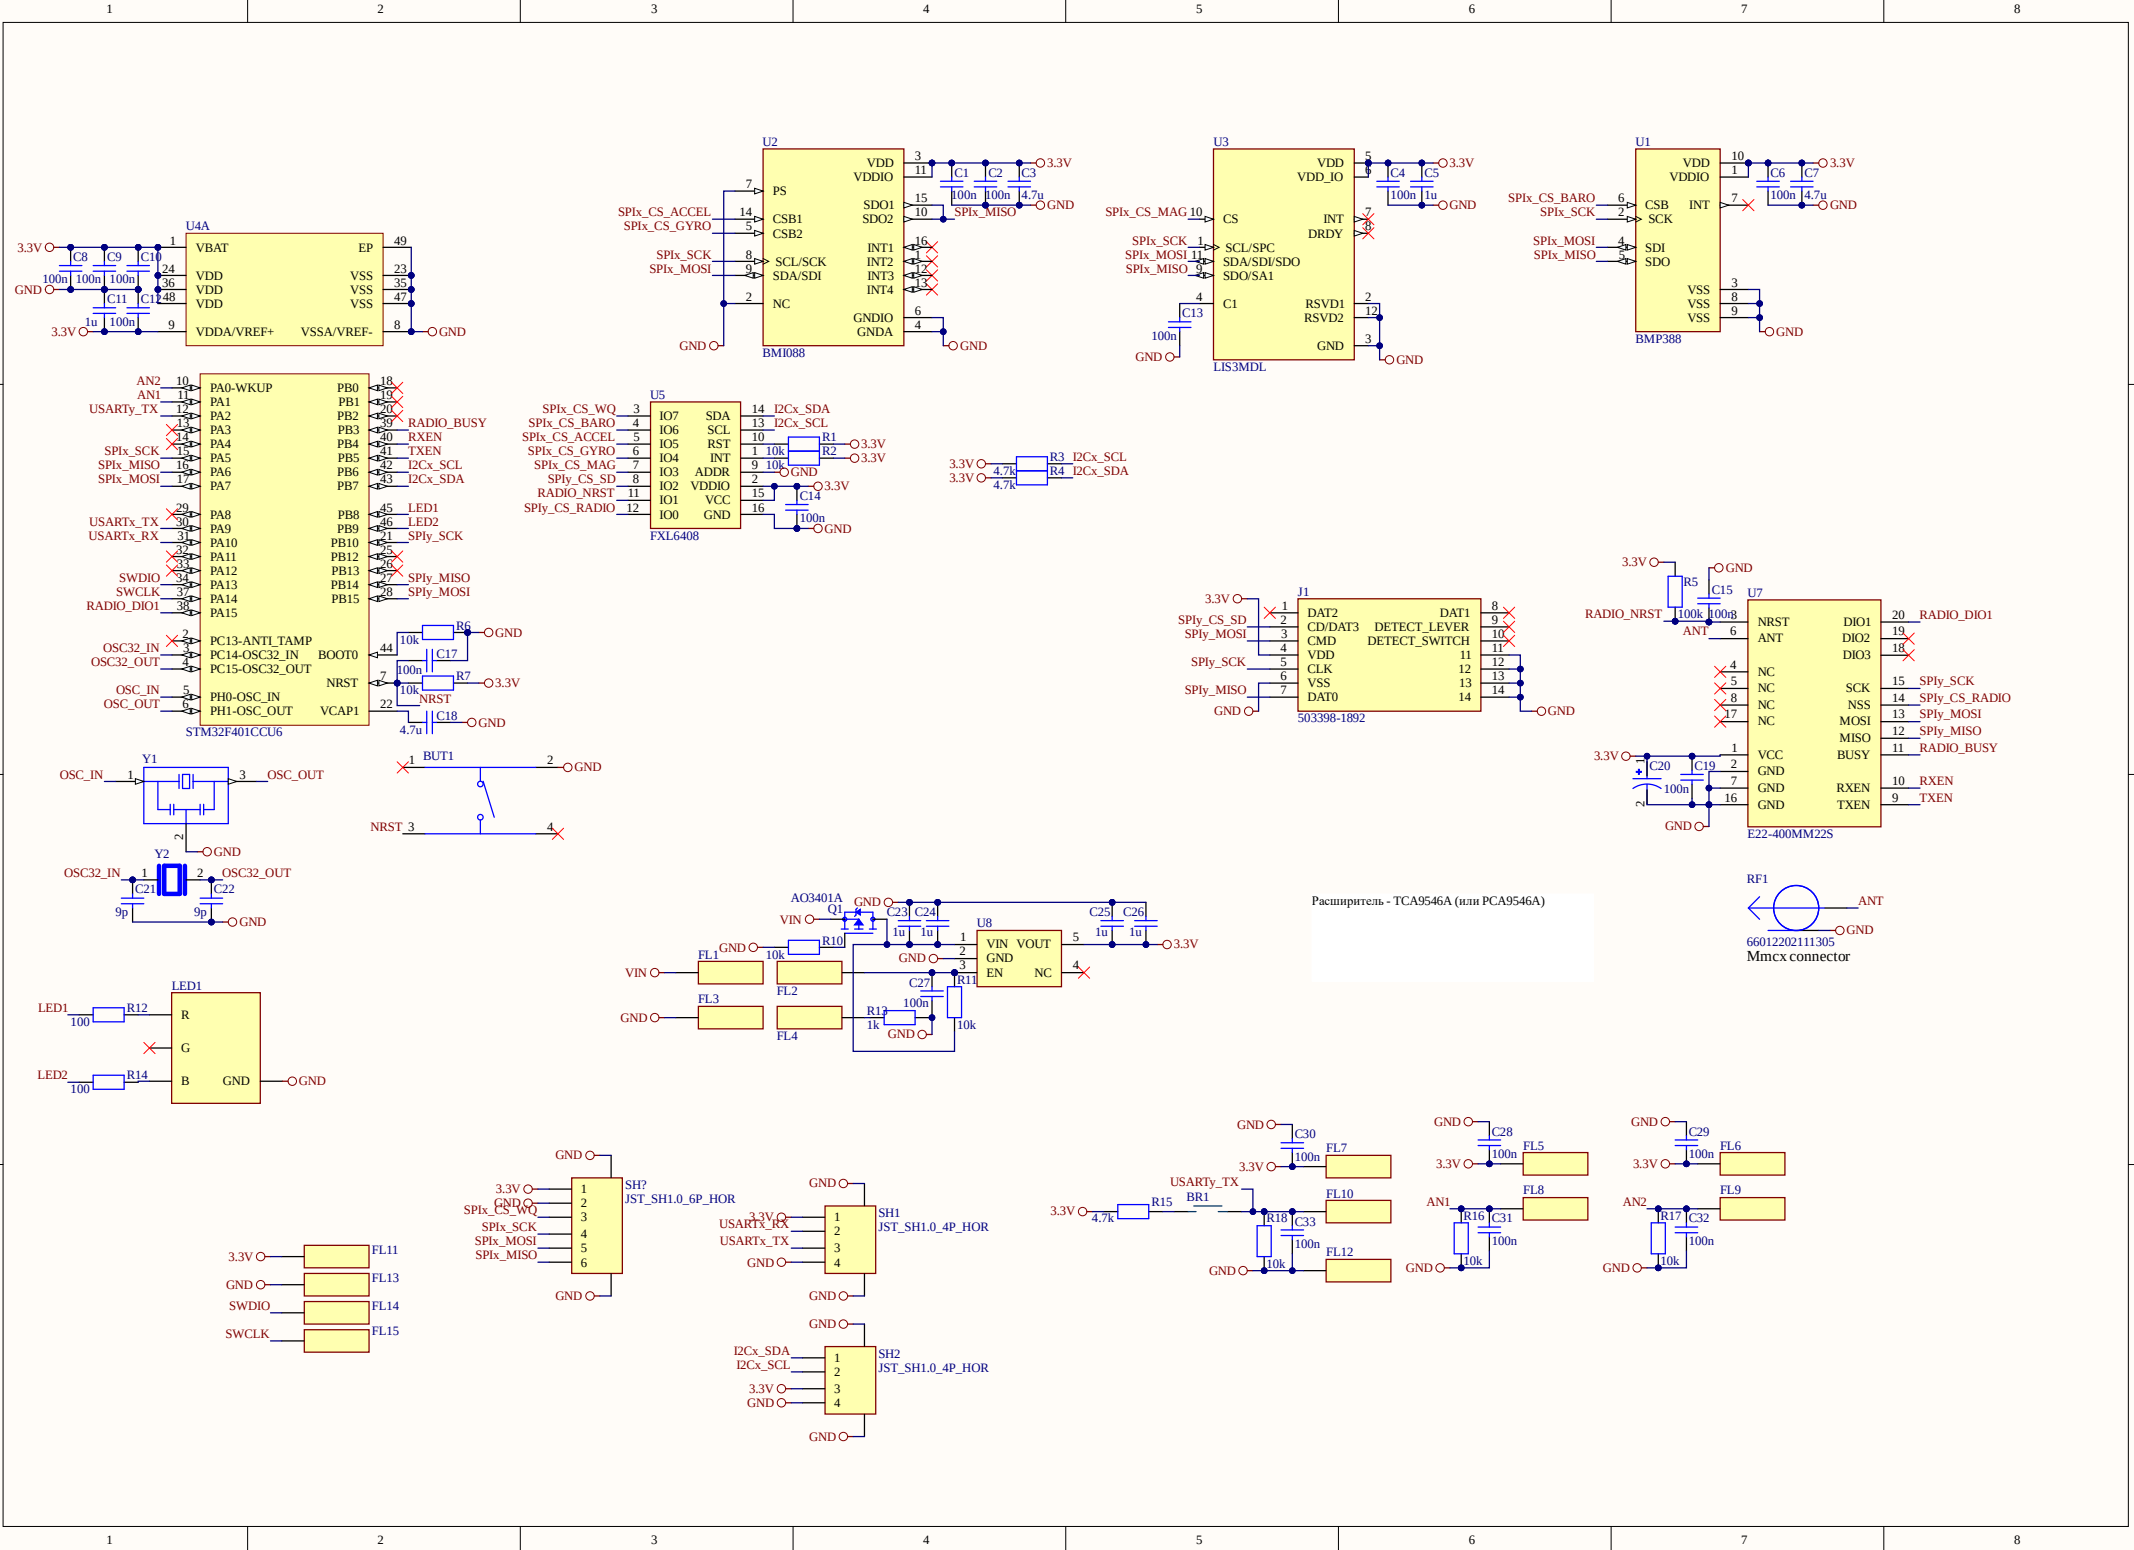

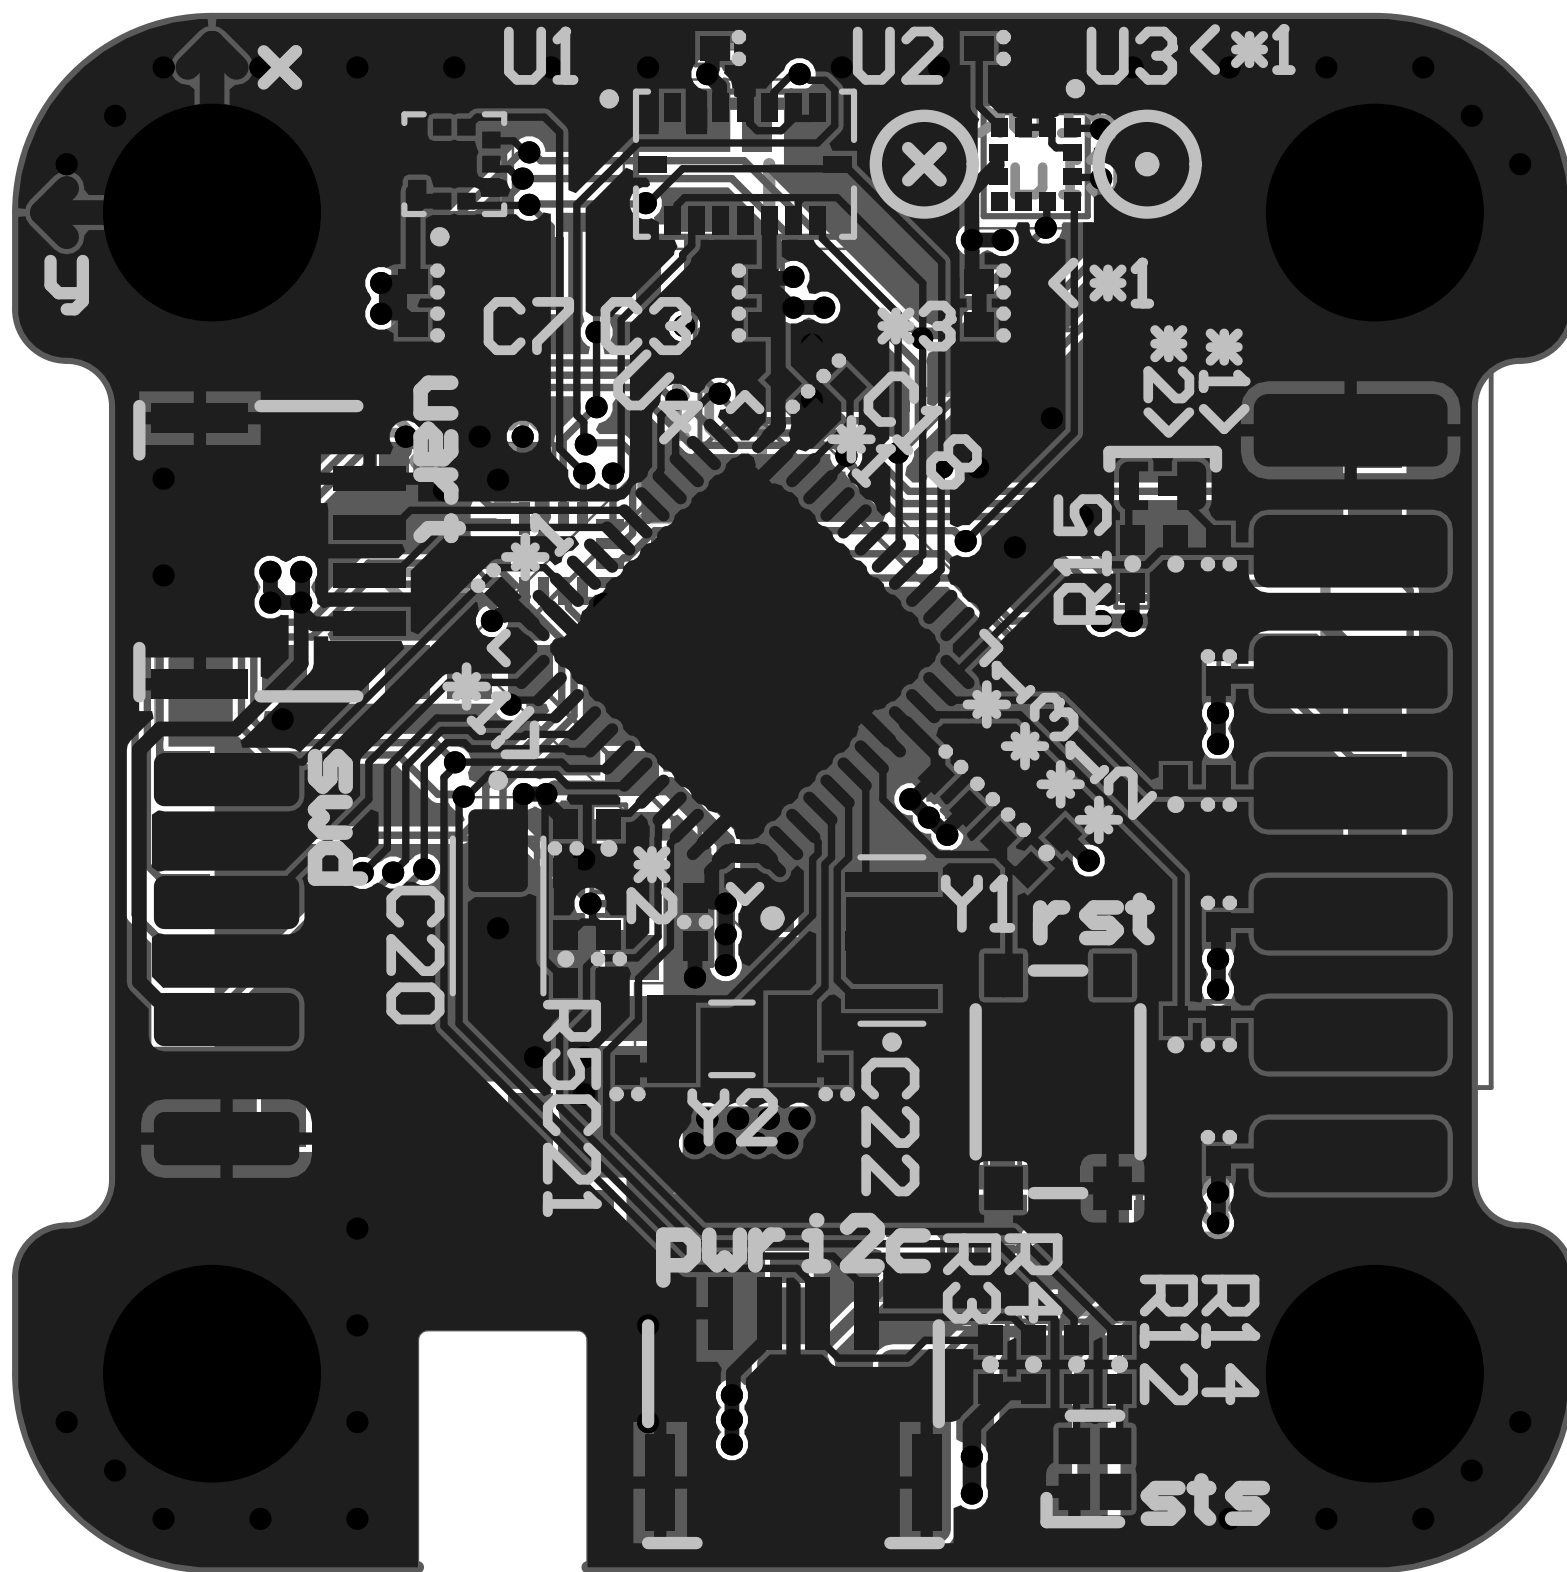

Comment	Description	Designator	Footprint	LibRef	Quantity
BRIDGE_2P_A		BR1	BRIDGE_2P_A	BRIDGE_2P_A	1
BUT_4P_32*42*25		BUT1	BUT_4P_32*42*25	BUT_4P_32*42*25	1
100n		C1, C2, C4, C6, C8, C9, C10, C12, C13, C14, C15, C17, C19, C27, C28, C29, C30, C31, C32, C33	C0402	C0402	20
4.7u		C3, C7, C18	C0402	C0402	3
1u		C5, C11, C23, C24, C25, C26	C0402	C0402	6
T491A106K010AT2478	10 μ F Molded Tantalum Capacitors 10 V 1206 (3216 Metric) 3.8Ohm	C20	CAPMP3216X180N	T491A106K010AT2478	1
9p		C21, C22	C0402	C0402	2
FIELD_1P_7530		FL1, FL2, FL3, FL4, FL5, FL6, FL7, FL8, FL9, FL10, FL11, FL12, FL13, FL14, FL15	FIELD_1P_7530	FIELD_1P_7530	15
503398-1892	MicroSD SMT Push-Push 1.28mm height MicroSD SMT Push-Push 1.28mm height	J1	5033981892	503398-1892	1
RGB_LED_0603-0402_Cathode	620-625 / 520-525 / 460-470 nm 2,0-2,6 / 3,0-3,4 / 3,2-3,4 V I(MA):20 mA	LED1	RGB_LED_0603-0402_Cathode	RGB_LED_0603-0402_Cathode	1
AO3401A	P-Channel 30 V 4A (Ta) 1.4W (Ta) Surface Mount SOT-23-3	Q1	SOT23-3	AO3401A	1
10k		R1, R2, R6, R7, R10, R11, R16, R17, R18	R0402	R0402	9
4.7k		R3, R4, R15	R0402	R0402	3
100k		R5	R0402	R0402	1
100		R12, R14	R0402	R0402	2
1k		R13	R0402	R0402	1
66012202111305		RF1	66012202111305	66012202111305	1
JST_SH1.0_4P_HOR		SH1, SH2	JST_SH1.0_4P_HOR	JST_SH1.0_4P_HOR	2
JST_SH1.0_6P_HOR		SH?	JST_SH1.0_6P_HOR	JST_SH1.0_6P_HOR	1
BMP388	P-Sensor SPI I2C 1, 25 Bar SMD	U1	PQFN50P200X200X80-10N	BMP388	1
BMI088	High-performance 6-axis inertial sensor (accelerometer + gyroscope) Check prices	U2	PQFN50P450X300X100-16N	BMI088	1
LIS3MDL	Magnetoresistive Sensor X, Y, Z Axis 12-LGA (2x2)	U3	XDCR_LIS3MDL	LIS3MDL	1
STM32F401CCU6	ARM Cortex-M4 32-bit MCU+FPU, 105 DMIPS, 256 kB Flash, 64 kB Internal RAM, 36 I/Os, 48-pin U/QFPN, -40 to 85 degC, Tray	U4	STM-UFQFPN48_N	STM32F401CCU6	1
FXL6408		U5	UQFN16	FXL6408	1
E22-400MM22S		U7	E22-400MM22S	E22-400MM22S	1
0.6A; 3.3V		U8	SOT-25	AP2112K-3.3TRG1	1
CSTCE20M0V53-R0	20MHz Ceramic Resonator Built in Capacitor 15pF $\pm$ 0.3% -20 $^{\circ}$ C ~ 80 $^{\circ}$ C Surface Mount	Y1	OSC_CSTCE20M0V53-R0	CSTCE20M0V53-R0	1
CTS3-32.768-12.5-20-R	32.768 kHz $\pm$ 20ppm Crystal 12.5pF 65 kOhms 2-SMD, No Lead	Y2	XTAL_CTS3-32.768-12.5-20-R	CTS3-32.768-12.5-20-R	1