
	DRAWING REVISION INFORMATION					
REV	DESCRIPTION	DRAWN BY	ISSUE DATE			
-	ORIGINAL ISSUE	TVM	10/06/14			
-	REV - IS EQUAL TO PROTO/QUOTE REV 1	TVM	10/06/14			



SECTION A-A


CRITICAL

MAJOR

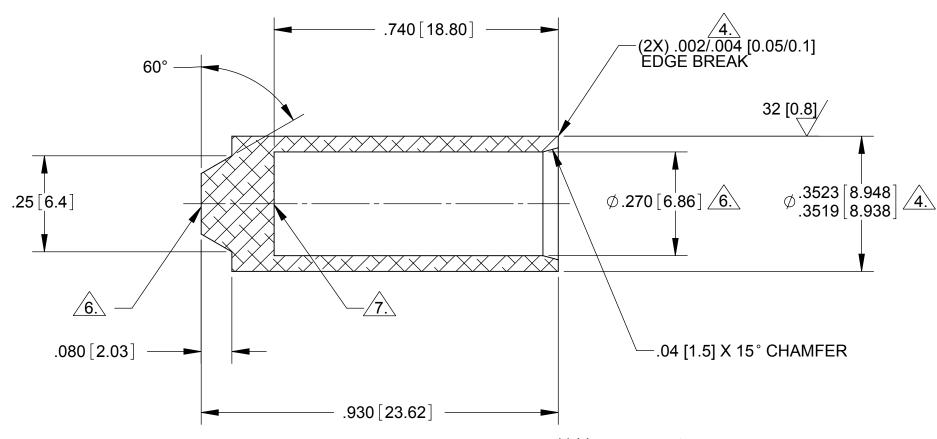


2.硬陽,依照規範MIL-A-8625, TYPE III, CLASS 2 厚度.0008[0.020]+/-.0004[0.010]

- 3.所有尺寸都是陽極之後
- 4. 不允許有銳角
- 5.未指定R角 .005/.015[0.12/0.38]
- 6.允許在此尺寸或是表面有接觸點
- 7.僅允許此面有中心點Ø.06[1.5] MAX

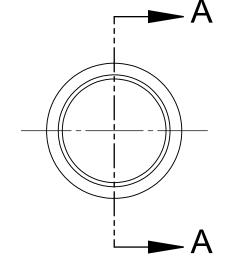

NOTES:

- 1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
- 2. HARD ANODIZE TO YIELD .0008 [0.020] \pm .0004 [0.010] BUILD UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
- 3. ALL DIMENSIONS APPLY AFTER ANODIZING
- 4. SHARP EDGES WILL NOT BE TOLERATED
- 5. UNSPECIFIED FILLETS & RADII .005/.015 [0.12/0.38]
- 6. CONTACT POINTS PERMITTED ON DIAMETER OR SURFACE
 - CENTER PERMISSIBLE THIS SIDE ONLY, \emptyset .06 [1.5] MAX



SCALE 2:1

	UNLESS OTHERWISE SPECIFIED					
	DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]					
	$.xx[x.x] \pm .015[0.38]$					
	$.xxx[x.xx] \pm .005[0.13]$					
	ANGLES ± 5°					
KEY CHARACTERISTIC SYMBOLS	SURFACE FINISH 125 [3.2]					
(Cr) (Ma)	THIRD ANGLE					

CURRENT ISSUE	DATE							
DRAWN								
TVM	06/18/14							
CHECKED		TITLE						
MMC	06/25/14	VALVE						
MFG ENG								
-	-							
APPROVED		SIZE			DWG NO.			REV
DGP	10/06/14	В			98892-29			-
ISSUED								
DD I	10/06/14	SCALE	⊿·1	FST WT	0 004 LBS	SHEET	1 OF 1	