SO-101 ArUco Marker Sheet (18mm / 16mm)

A4 portrait / print at 100% / no fit-to-page / DICT_4X4_50

Cut along outer dashed box; keep full 2mm white border on every side.

18 mm overall / black marker 14 mm

ID 0

ID 1

ID 2



ID 3



ID 4



ID 5



ID 6

ID 7

16 mm overall / black marker 12 mm

ID 0

ID 1



ID 2



ID 3



ID 4



ID 5



ID 6



ID 7

Start with IDs 0, 1, 2 in the 16 mm row. IDs 3-7 are spares.

All markers use OpenCV ArUco DICT_4X4_50; flat paper only.

Do not cover the black border, place across joints, or cover wiring.



50 mm

SO-101 J2 / J3 mounting diagram

Conceptual side view: mounting is link-relative, not joint-center.

ID 0: base-side link before J2 (fixed with respect to J2)

ID 1: upper-arm link between J2 and J3

ID 2: forearm link after J3

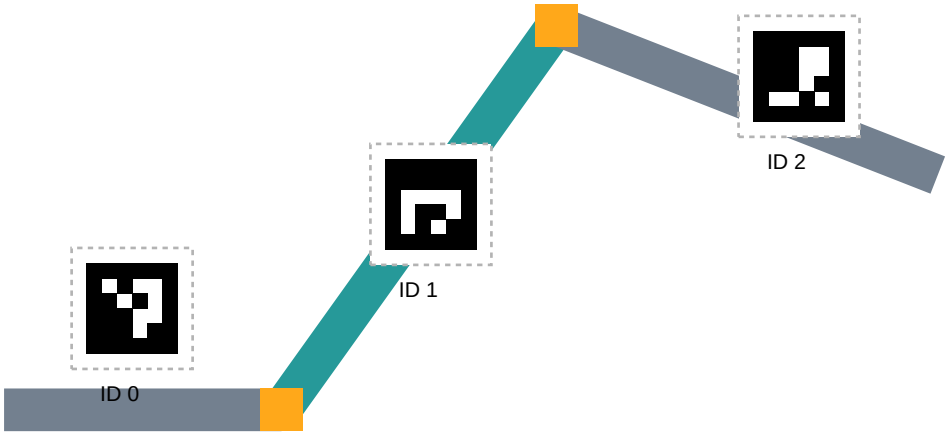

J2 change = relative pose change between ID 0 and ID 1

J3 change = relative pose change between ID 1 and ID 2

Attach markers on rigid, flat, visible faces. Avoid cables and joints.

Use removable low-tack tape; never bend or wrap the marker.

Photo from a fixed camera viewpoint. Do not command the servo.

This is a schematic, not a robot-specific placement drawing.

Marker pose changes alone do not establish absolute URDF zero offsets.