XCMG
徐工集团

ELECTRIC DUMP TRUCK



徐工徐工
助您成功

XCMG SOLID TO SUCCEED

550kw	80km/h	150km
Peak Power	Max. Speed	Endurance Mileage

8×4 XGA3310BEVWEA

整机介绍

智能舒适 Intelligent and comfortable

- 采用徐工新能源最新高端驾驶室，环抱式内饰设计风格，简约大气，空间开阔，人机工程优化，操纵便捷，驾乘舒适。
  The latest high-end cabin of XCMG New Energy Vehicle is adopted, with an encircling interior design style, which is simple, elegant and spacious. Meanwhile, the ergonomic optimization can provide an easy operation and a comfortable driving experience.
- 电动后视镜、电动灯光调节、遥控钥匙、中控门锁、电动玻璃、多功能方向盘、12.3吋全液晶仪表。
  The vehicle also has other excellent features, including electric rear-view mirrors, an electric light adjustment system, remote keys, central door locks, electric glasses, a multifunctional steering wheel and a 12.3-inch full LCD instrument panel.


高效节能 Efficient and energy-saving

- 选用大功率、高效率永磁同步电机+制动能量回收系统，驱动效率高，能量利用率高；
  A high-power and high-efficiency permanent magnetsynchronous motor+a braking energyrecovery system are adopted, with high driving efficiency and high energy utilization rate.
- 充换电一体，可充可换，3-5分钟极速换电，高效运营；
  The charging and swapping integrated-type batteries are adopted, which are rechargeable and replaceable. Meanwhile, it can achieve 3-5 minutes of fast battery swapping, featuring efficient operation.
- 大容量、长寿命动力电池，集成式热管理系统，单次续航更久，效能更强；
  Large capacity and long-life power batteries are equipped, with the integrated thermal management system, which features longer single endurance and higher efficiency.
- 可匹配8000㎜×2500㎜×2250㎜超大容量货箱，单次载重更多，更高效.
  The vehicle can match a 8000mm × 2500mm × 2250mm ultra-large capacity truck body, with more single loading capacity and higher efficiency.

安全可靠 Safe and reliable

- 匹配前车防撞预警系统（FCWS）、车道偏离预警系统（LDWS）、行人预警（PCW）等，助力行车安全。
  The vehicle adopts many multi-functional system to assist in driving safety, which includes the Front Collision Warning System (FCWS), the Lane Departure Warning System (LDWS), and the Pedestrian Collision Warning (PCW) technology.
- 采用加强型底盘结构，承载能力更强，核心零部件防护等级达IP68，涉水无忧，电池具备保温及热管理功能，适应环境温度-35-65℃工作，满足恶劣环境工作需求。
  The vehicle features a reinforced chassis structure, providing higher load-bearing capacity. The ingress protection rating of core components is up to IP68, for worry-free wading. The Battery Management System (BMS) has insulation and thermal management functions, which is more adaptable to working in environments with ambient temperatures ranging from -35°C to 65°C, meeting the requirements of working in harsh environments.



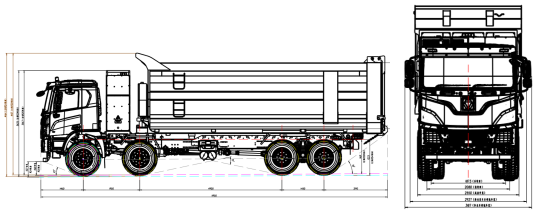

外形尺寸/Appearance size

前悬/Front overhang	1460(mm)
第一、二轴轴距 First And Second Wheel Base	1950(mm)
第二、三轴轴距 Second And Third Wheel Base	4900(mm)
第三、四轴轴距 Third And Four Wheel Base	1450(mm)
后悬/Rear Overhang	2190(mm)
最大长度/Max Length	11950(mm)
车架上翼面尾端离地高度 The ground clearance height of the tail end of the vehicle frame's upper wing surface	1223(mm)
最大高度/Max Height	4164(mm)
轮距/Wheel Tread	2060+1873(mm)
整车宽度/Overall Width	2700(mm)
最小离地间隙/Min. Clearance	365(mm)

性能参数 PERFORMANCE PARAMETERS

驱动形式/Drive Type

8×4

整备质量/Kerb Mass

24595kg

最大允许总质量/GVW

70000kg

最高车速/Max.Speed

80km/h

续航里程
Endurance Mileage

150km

外形尺寸/Dimension

11950×2700×4164(mm)

轴距/Wheelbase

1950+4900+1450(mm)

最大爬坡度/Grade Ability

28%

主要部件/Main Parts

电机/MOTOR

型号/Model	额定功率/峰值功率 Rated/Peak Power	额定转速/峰值转速 Rated/Peak Speed	额定扭矩/最大扭矩 Rated/Maximum Torque
TZ460XS-LKM3001	360/550kw	2100/3500rpm	1640/3060N·m

电池/BATTERY

品牌/Brand	电压/Voltage	电池电量 Battery power
CATL	656.88V	352.08/400Kwh

变速箱/TRANSMISSION

型号/Model	操纵方式/Type	前进档速比 Forward Ratio
J4S280	AMT	8.674/4.574/2.290/1

车桥/AXLE

前桥型号 Front Axle Model	后桥型号 Rear Axle Model	主减速器速比 Main Reducer Ratio
9.5T	16T	6.733

轮胎/TIRE

轮辋/Rim	轮胎/Tire
8.5V-20/8.5V-24	12.00R20/12.00R24

悬架/SUSPENSION

前/Front	型式/Type	多片簧/Multi-Springs
	板簧片数/Leaf Springs	10
后/Rear	型式/Type	多片簧/Multi-Springs
	板簧片数/Leaf Springs	14

驾驶室/CABIN

型号/Model	左右驾/Left/Right Driving	空调/AC	乘员人数/Person Allowed In
XG1-H	RHD	Standard	2



XUZHOU XCMG AUTO MANUFACTURING CO.,LTD.

Add： No.19 Zhujiang East Road, Hi-tech Industrial Development Zone,Xuzhou,Jiangsu province,China
P.C.： 221116
Fax： +86-0516-83189077
Web： www.xcmg.com/xgqc