1 Camera bracket mounting and use

Version: V1.0.0 2026-11-06

The camera bracket holds the camera on a LiteGrip gripper or holder, and the whole bracket can also be fixed to the column, for vision capture and hand-eye calibration. The three figures below follow the mounting positions; the numbers in each table match the red markers in the figure.

1.1 On the gripper or holder

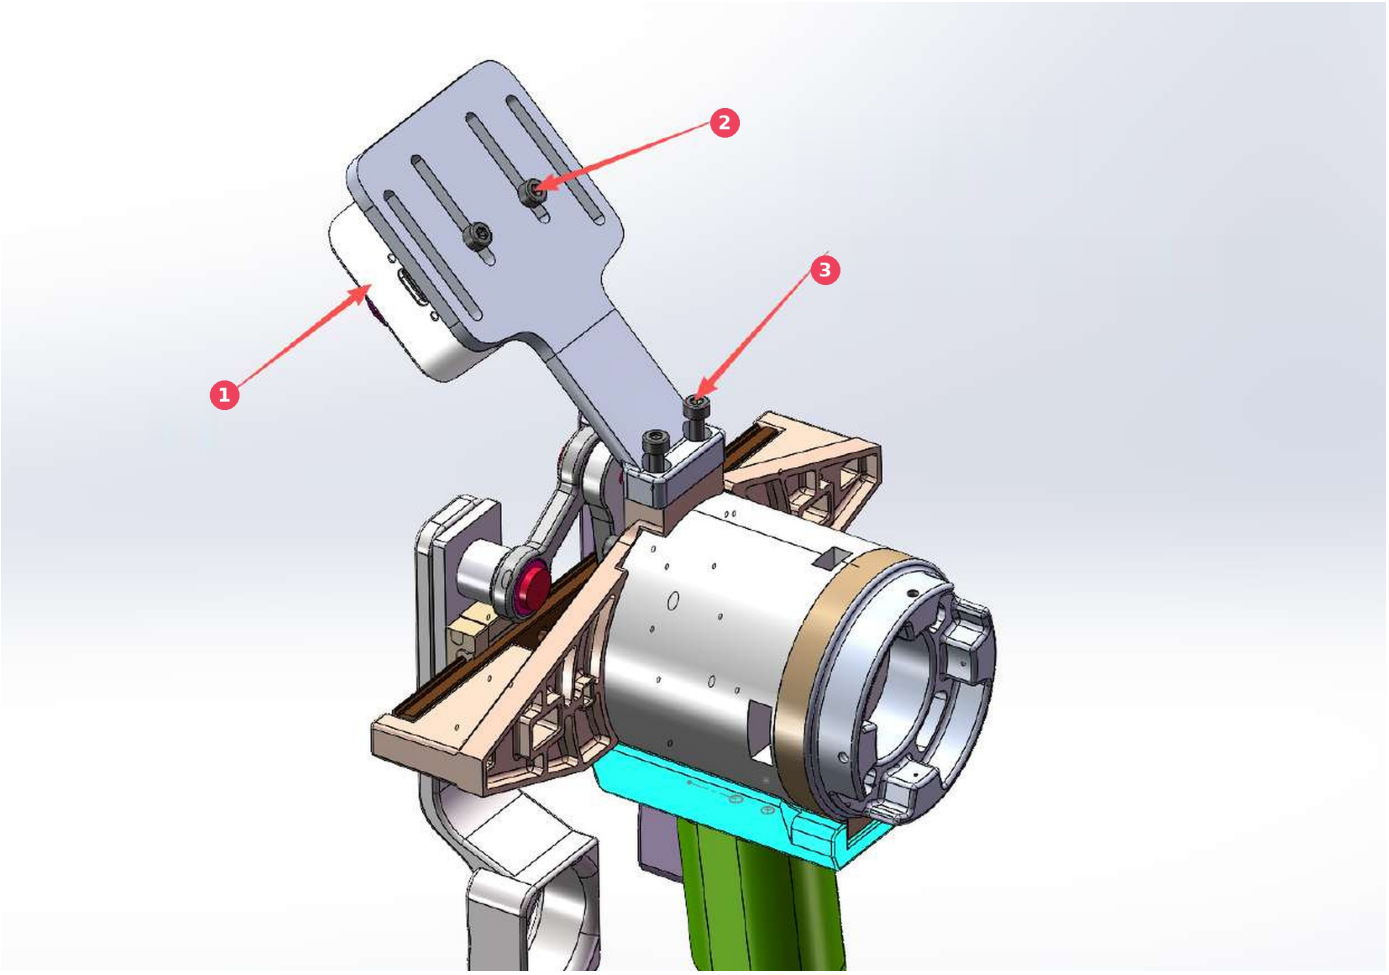


Figure 1. The camera, the bracket and the gripper

No.	Item	Description
1	Camera	The camera sits on the bracket, looking past the gripper
2	Fixing the camera	Two M3×6–M3×8 screws through the bracket holes fix the camera
3	Fixing the bracket	Two M3×6 socket head cap screws mount the bracket onto the holes on the holder or gripper, as shown

1.2 Fixing and adjusting the bracket

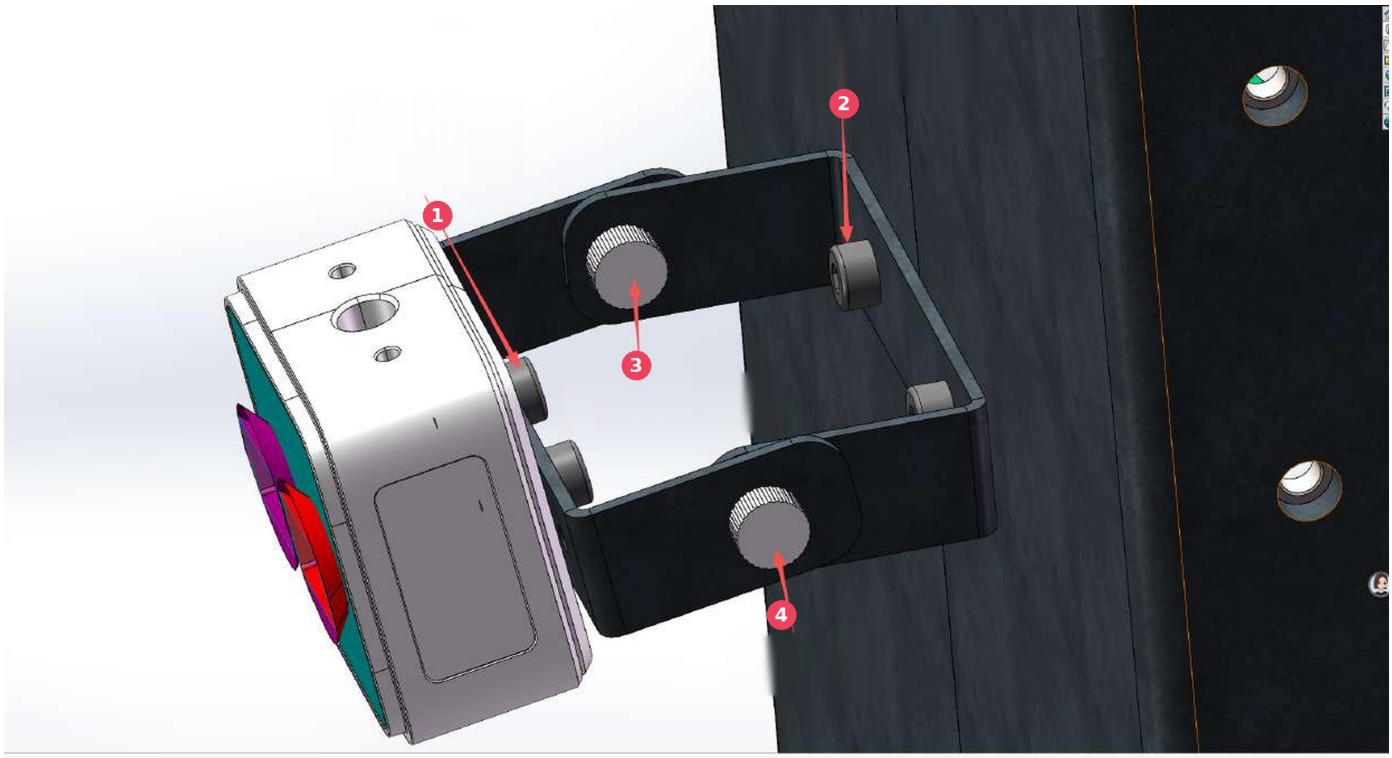


Figure 2. The bracket on the column, with its two adjustments

No.	Item	Description
1	Fixing the camera	Two M3×6–M3×8 socket head cap screws fix the camera to the bracket
2	Fixing the bracket	Two M4×8 socket head cap screws fix the bracket to the outer face of the column
3	Rotation	Two M3 thumb nuts lock and adjust the rotation of the bracket
4	Adjustment	Two M3 thumb screws lock and adjust the bracket

1.3 Mounting position on the column

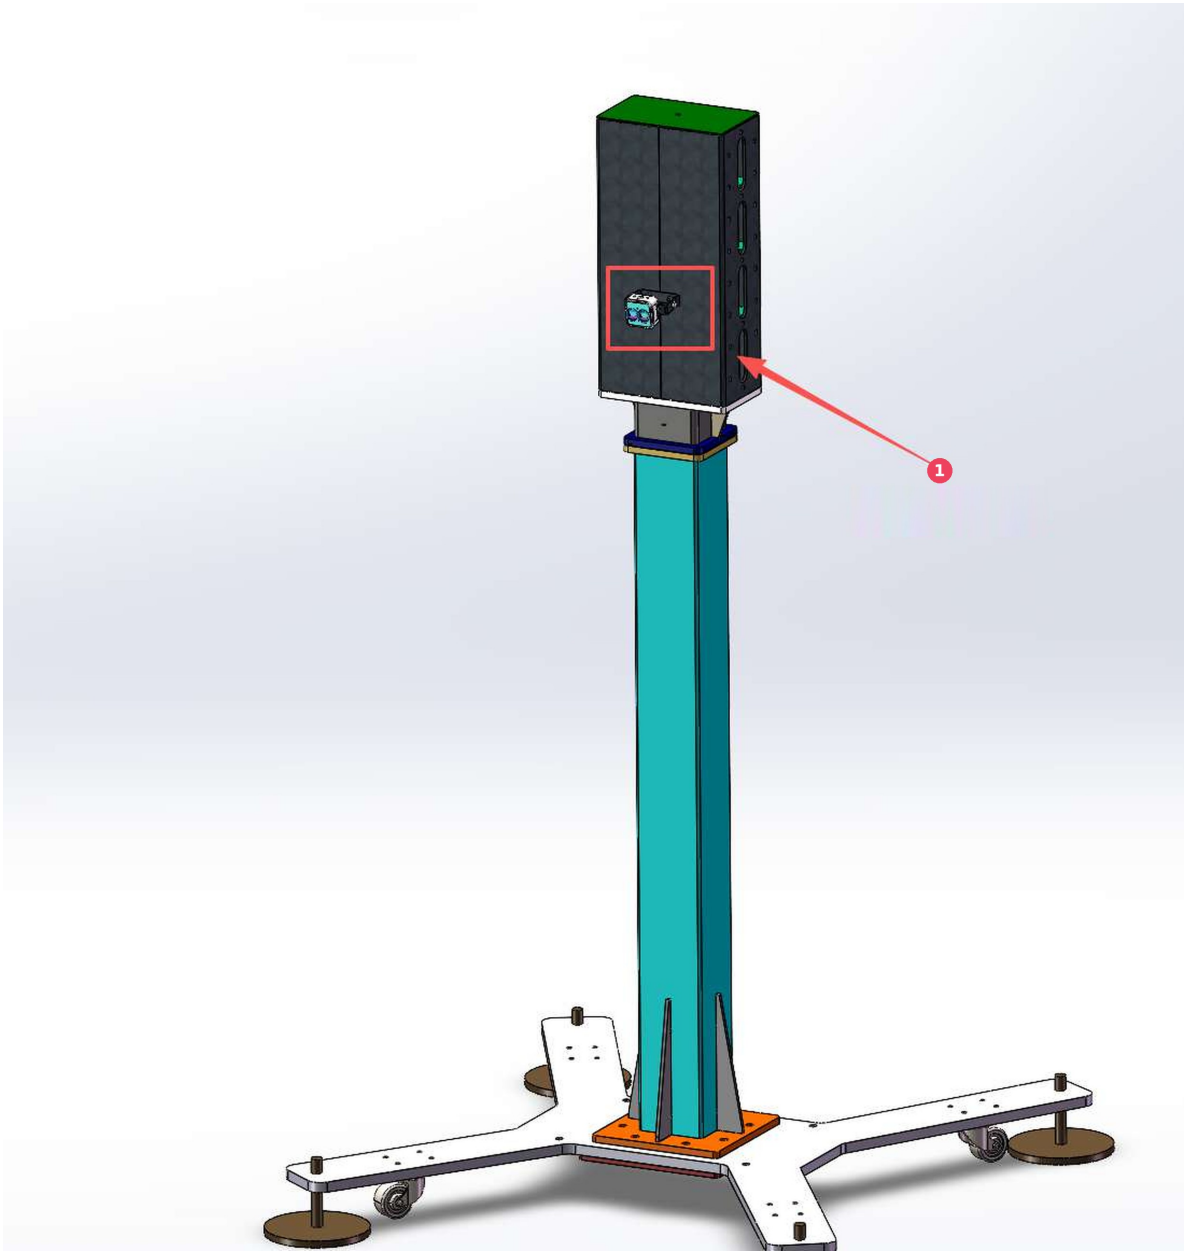


Figure 3. Where the bracket sits on top of the column

No.	Item	Description
1	Camera bracket mounting position	The bracket is fixed to the side of the box on top of the column, in the red frame