

深圳中菱科技有限公司


Motor Load Characteristics Curve

No: FA2201060001

Motor Type: ZLLG80ASM250-4096

Feature: Torque Mode

TestDate: 2022/01/06

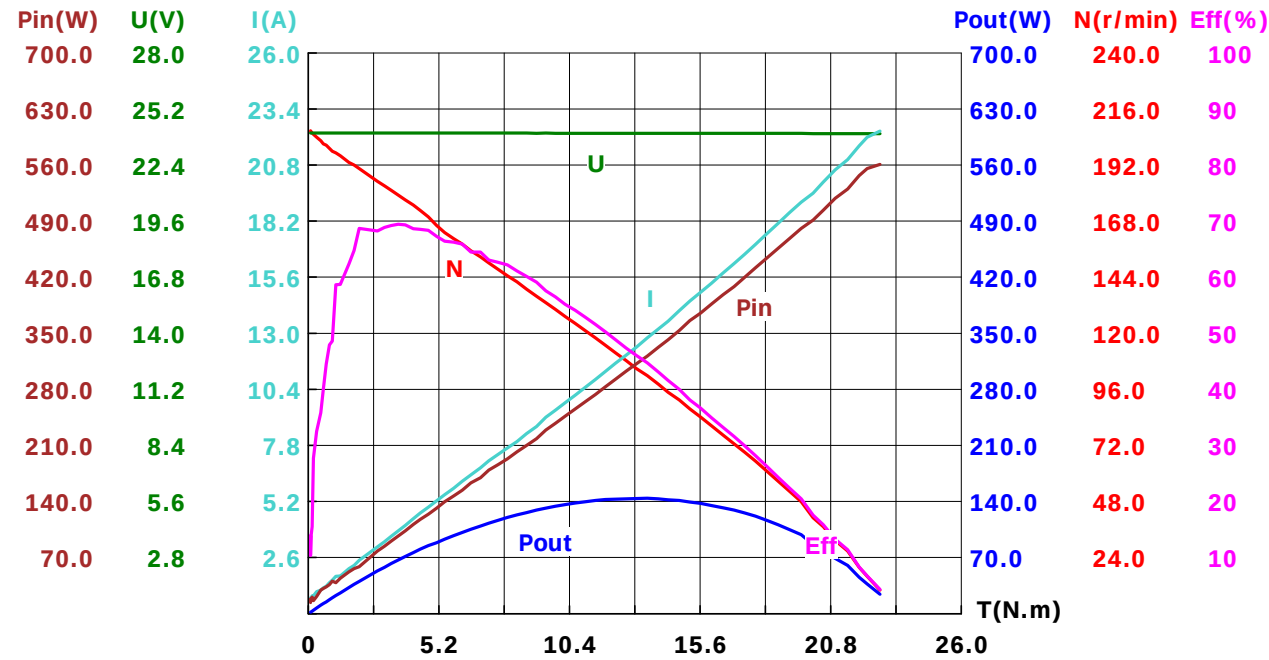

T(N.m)	N(r/min)	Pout(W)	U(V)	I(A)	Pin(W)	Eff(%)
0.09	206.7	1.95	24.00	0.731	13.98	13.9
0.11	206.3	2.37	24.00	0.749	16.88	14.1
0.21	205.2	4.51	24.00	0.831	16.27	27.7
0.50	202.5	10.59	24.00	1.095	29.55	35.9
0.71	200.6	14.90	24.00	1.280	33.46	44.5
0.96	198.0	19.89	24.00	1.562	40.89	48.6
1.27	196.0	26.05	24.00	1.751	44.35	58.7
1.82	192.1	36.58	24.00	2.238	56.47	64.8
2.76	185.1	53.46	24.00	3.103	78.30	68.3
3.31	181.2	62.76	24.00	3.589	90.61	69.3
3.87	177.1	71.72	24.00	4.096	103.38	69.4
4.47	172.6	80.73	24.00	4.668	117.77	68.6
5.11	166.2	88.87	24.00	5.239	132.04	67.3
5.79	160.6	97.30	24.00	5.810	146.88	66.2
6.47	155.4	105.37	24.00	6.438	163.33	64.5
7.19	150.2	113.16	24.00	7.089	179.37	63.1
7.93	144.7	120.22	24.00	7.685	193.32	62.2
8.69	138.9	126.45	24.00	8.354	210.24	60.1
9.46	133.2	131.99	24.00	9.108	229.21	57.6
10.22	127.2	136.16	23.99	9.778	246.58	55.2
11.03	121.1	139.90	23.99	10.502	264.79	52.8
11.83	115.0	142.48	23.99	11.238	283.33	50.3
12.66	108.3	143.58	23.99	11.998	302.96	47.4
13.50	101.9	144.05	23.99	12.789	321.81	44.8
14.33	94.8	142.25	23.99	13.557	342.06	41.6
15.20	87.7	139.58	23.99	14.506	365.92	38.1
16.06	80.4	135.20	23.99	15.337	386.91	34.9
16.96	72.8	129.27	23.99	16.231	408.47	31.6
17.81	65.3	121.76	23.99	17.131	431.73	28.2
18.71	56.7	111.07	23.99	18.112	456.35	24.3
19.62	48.0	98.65	23.99	19.080	481.08	20.5
20.50	37.2	79.88	23.98	20.016	503.94	15.9
21.47	26.9	60.49	23.98	21.059	530.33	11.4
22.25	16.0	37.29	23.98	22.091	555.60	6.7
22.76	10.2	24.31	23.98	22.376	561.11	4.3

Description	T(N.m)	N(r/min)	Pout(W)	U(V)	I(A)	Pin(W)	Eff(%)
No_Load	0.09	206.7	1.95	24.00	0.731	13.98	13.9
Max_Eff	3.59	179.2	67.32	24.00	3.843	96.89	69.5
Max_Pout	13.50	101.9	144.05	23.99	12.789	321.81	44.8
Max_Torque	22.76	10.2	24.31	23.98	22.376	561.11	4.3
The End	22.76	10.2	24.31	23.98	22.376	561.11	4.3

Audit: