


深圳中菱科技有限公司

Motor Load Characteristics Curve

No: FA2201060002

Motor Type: ZLLG80ASM250-4096
Feature: Torque Mode

TestDate: 2022/01/06

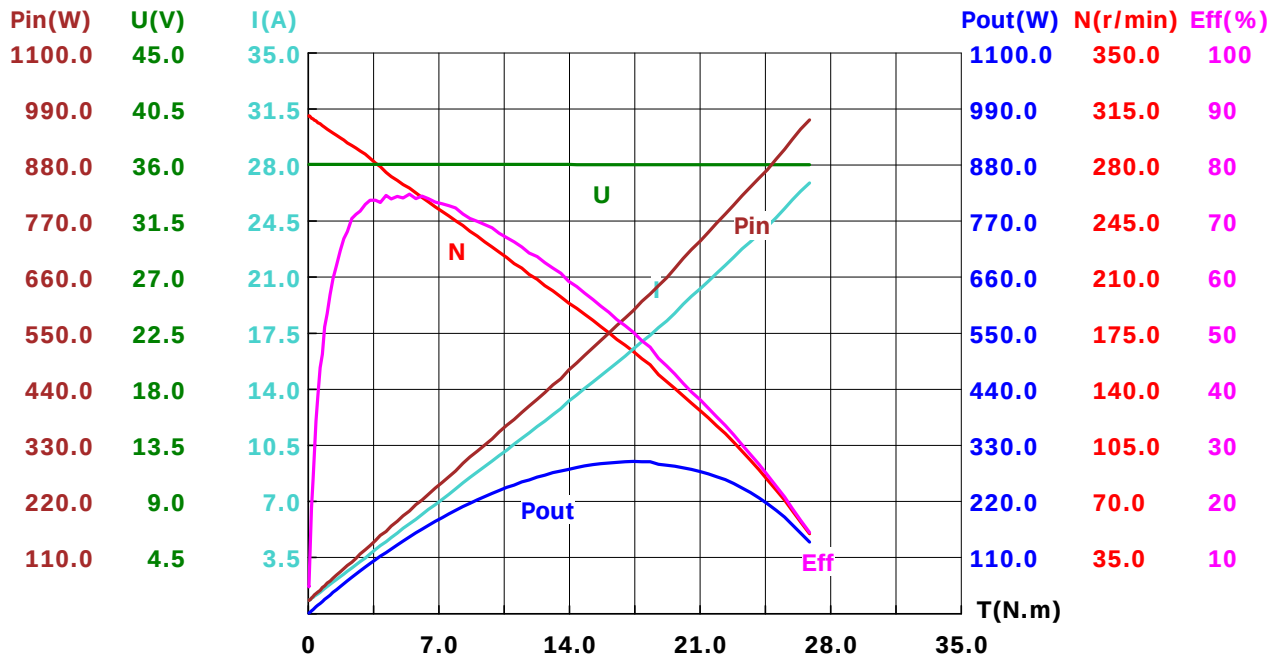

T(N.m)	N(r/min)	Pout(W)	U(V)	I(A)	Pin(W)	Eff(%)
0.04	310.6	1.30	36.06	0.848	26.41	4.9
0.07	310.6	2.28	36.06	0.864	27.25	8.3
0.18	309.3	5.83	36.06	0.969	30.83	18.9
0.33	308.1	10.64	36.06	1.089	37.23	28.6
0.52	306.5	16.68	36.06	1.247	42.86	38.9
0.75	304.6	23.90	36.06	1.463	51.62	46.3
1.02	302.4	32.28	36.06	1.704	60.27	53.6
1.33	300.1	41.76	36.06	1.980	69.95	59.7
1.71	297.0	53.14	36.06	2.315	82.05	64.8
2.10	293.9	64.58	36.06	2.663	94.77	68.1
2.55	290.6	77.54	36.06	3.054	108.87	71.2
3.06	286.8	91.83	36.06	3.483	125.83	73.0
3.60	281.2	105.93	36.06	4.017	143.60	73.8
4.17	275.4	120.17	36.06	4.503	161.05	74.6
4.77	270.5	135.01	36.05	5.041	181.46	74.4
5.43	265.6	150.91	36.05	5.615	201.72	74.8
6.10	260.0	165.96	36.05	6.200	222.74	74.5
6.81	253.9	181.19	36.05	6.810	246.83	73.4
7.52	248.3	195.64	36.05	7.454	268.78	72.8
8.28	242.3	210.19	36.05	8.179	294.94	71.3
9.05	235.7	223.45	36.05	8.852	319.20	70.0
9.84	229.0	236.03	36.05	9.532	342.95	68.8
10.64	222.4	247.84	36.05	10.214	369.68	67.0
11.44	215.7	258.43	36.05	10.948	395.12	65.4
12.26	208.7	267.95	36.05	11.680	420.77	63.7
13.11	201.6	276.77	36.05	12.418	449.13	61.6
13.95	194.0	283.39	36.05	13.270	478.07	59.3
14.81	186.9	289.84	36.04	14.055	506.79	57.2
15.69	179.1	294.23	36.04	14.870	536.14	54.9
16.55	171.3	296.83	36.04	15.661	565.74	52.5
17.44	163.6	298.73	36.04	16.533	595.34	50.2
18.32	155.4	298.06	36.04	17.386	626.98	47.5
19.21	144.8	291.37	36.04	18.274	659.14	44.2
20.09	136.1	286.39	36.04	19.309	696.88	41.1
26.87	50.0	140.69	36.03	26.894	968.87	14.5

Description	T(N.m)	N(r/min)	Pout(W)	U(V)	I(A)	Pin(W)	Eff(%)
No_Load	0.04	310.6	1.30	36.06	0.848	26.41	4.9
Max_Eff	5.43	265.6	150.91	36.05	5.615	201.72	74.8
Max_Pout	17.44	163.6	298.73	36.04	16.533	595.34	50.2
Max_Torque	26.87	50.0	140.69	36.03	26.894	968.87	14.5
The End	26.87	50.0	140.69	36.03	26.894	968.87	14.5

Audit: