


深圳中菱科技有限公司

Motor Load Characteristics Curve

No: FA2201060003

Motor Type: ZLLG80ASM250-4096
Feature: Torque Mode

TestDate: 2022/01/06

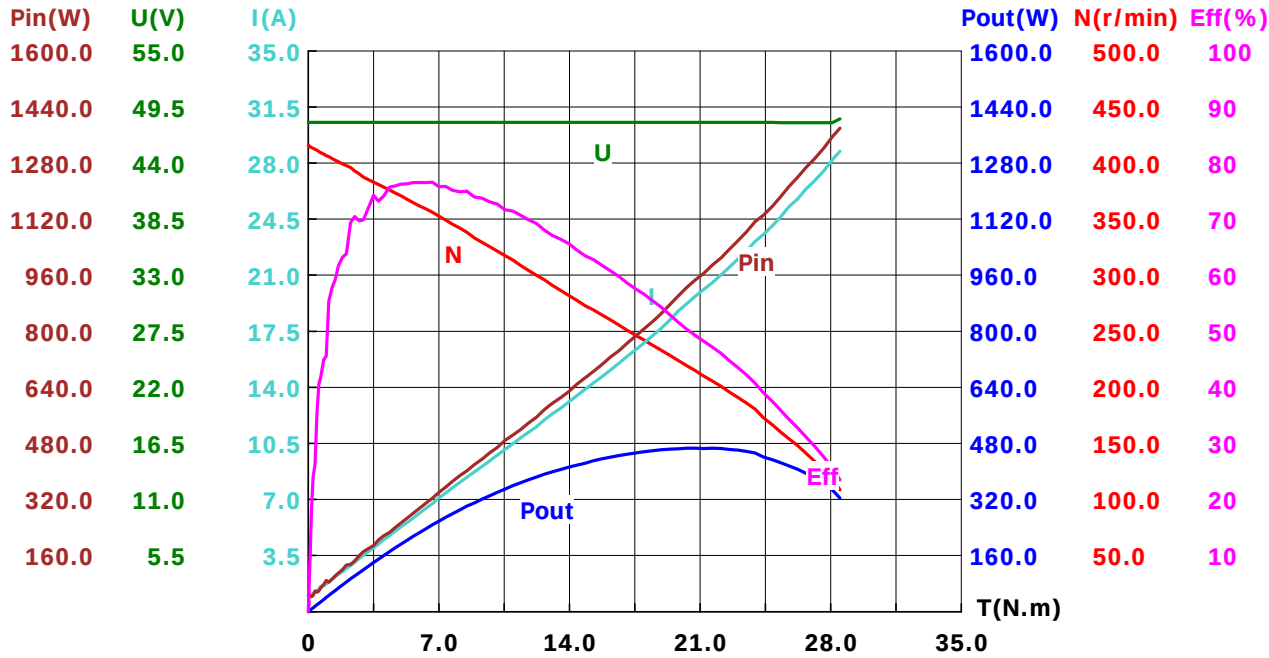

T(N.m)	N(r/min)	Pout(W)	U(V)	I(A)	Pin(W)	Eff(%)
0.00	415.6	0.00	48.01	0.970	45.92	0.0
0.01	416.1	0.44	48.01	0.931	44.25	1.0
0.11	414.6	4.77	48.00	1.038	45.57	10.5
0.26	413.3	11.24	48.01	1.145	46.75	24.1
0.46	411.4	19.80	48.01	1.321	56.02	35.3
0.67	409.3	28.70	48.01	1.608	68.45	41.9
0.96	406.8	40.86	48.01	1.740	89.61	45.6
1.27	404.1	53.70	48.01	2.016	93.01	57.7
1.62	401.3	68.03	48.01	2.343	110.27	61.7
2.05	397.8	85.33	48.01	2.692	133.78	63.8
2.49	393.0	102.40	48.01	3.078	145.27	70.5
2.96	387.5	120.02	48.00	3.514	171.74	69.9
3.76	381.0	149.90	48.00	4.223	204.67	73.2
4.36	376.1	171.59	48.00	4.751	226.61	75.7
4.97	371.0	192.94	48.00	5.284	253.06	76.2
5.64	364.8	215.29	48.00	5.849	281.24	76.6
6.29	359.2	236.79	48.00	6.449	309.36	76.5
6.99	352.7	258.34	48.00	7.106	340.88	75.8
7.72	345.7	279.62	48.00	7.733	372.03	75.2
8.49	338.6	301.16	48.00	8.385	401.54	75.0
9.31	329.2	321.05	48.00	9.064	435.49	73.7
10.12	321.5	340.79	48.00	9.768	468.50	72.7
10.96	313.5	359.86	48.00	10.482	503.74	71.4
11.79	304.6	376.10	48.00	11.192	537.98	69.9
12.66	295.9	392.30	48.00	11.989	576.80	68.0
13.55	286.3	406.23	47.99	12.724	612.17	66.4
14.39	277.8	418.59	47.99	13.492	649.23	64.5
15.29	269.1	430.82	47.99	14.280	686.06	62.8
16.20	260.3	441.52	47.99	15.087	726.65	60.8
17.07	251.2	448.95	47.99	15.926	765.26	58.7
18.01	242.3	456.88	47.99	16.784	807.19	56.6
18.89	233.4	461.84	47.99	17.661	849.03	54.4
19.80	224.3	465.19	47.99	18.747	899.87	51.7
20.72	215.1	466.81	47.99	19.686	946.24	49.3
28.50	108.7	324.39	48.36	28.742	1380.28	23.5

Description	T(N.m)	N(r/min)	Pout(W)	U(V)	I(A)	Pin(W)	Eff(%)
No_Load	0.00	415.6	0.00	48.01	0.970	45.92	0.0
Max_Eff	6.65	356.1	248.17	48.00	6.757	324.00	76.6
Max_Pout	20.72	215.1	466.81	47.99	19.686	946.24	49.3
Max_Torque	28.50	108.7	324.39	48.36	28.742	1380.28	23.5
The End	28.50	108.7	324.39	48.36	28.742	1380.28	23.5

Audit: