

1 Introduction

Drought Anticipatory Action (DAA)

bnet (Bayesian network) (see Ref.[2])

Standardized Precipitation Index (SPI) ranges from -4 (least rain) to 4 (most rain).

2 Notation and Conventions

We will use $\mathbb{1}(S)$ to denote the indicator function (a.k.a. the truth function). $\mathbb{1}(S)$ equals 1 if statement S is true, and 0 if S is false. For example, $\mathbb{1}(x \geq 0)$ equals 0 if $x < 0$ and 1 otherwise.

In this article, random variables will be indicated by underlining. For example, $P(\underline{x} > x)$ will denote the probability that the random variable $\underline{x}$ is greater than x .

Let

N = the number of times (seasons) in which predicted and observed droughts were compared.

$N_{x|a}$ = number of events in which a number of $a \in \{0, 1\}$ droughts occurred and a number of $x \in \{0, 1\}$ droughts were predicted. For example, $N_{1|0}$ is the number of events in which no drought actually occurred but it was predicted nonetheless (False Alarm).

$N_{0|0}$ = **True Negatives (TN)**, correct rejection

$N_{1|1}$ = **True Positives (TP)**, hit

$N_{0|1}$ = **False Positives (FP)**, miss, type II error or underestimation

$N_{1|0}$ = **False Negatives (FN)**, false alarm, type I error or overestimation

$$N_{|a} = \sum_{x'} N_{x'|a}, \quad N_{x|} = \sum_{a'} N_{x|a'} \quad (1)$$

$$N = \sum_x \sum_a N_{x|a} = \sum_a N_{|a} = \sum_x N_{x|} \quad (2)$$

$$P(x|a) = R_{x|a} = \frac{N_{x|a}}{N_{|a}}, \quad P'(a|x) = R'_{a|x} = \frac{N_{x|a}}{N_{x|}} \quad (3)$$

$$\sum_x P(x|a) = \sum_a P'(a|x) = 1 \quad (4)$$

Note that both $P(x|a)$ and $P'(a|x)$ are conditional probability distributions.

Note that $N_{x|a}$ for $x, a \in \{0, 1\}$ yields 4 degrees of freedom (dofs). Instead of those 4 dofs, we will use N and 3 others dofs, namely, hit rate (HR), false alarm rate (FAR) and area under ROC curve (AUROC). HR, FAR and AUROC are defined in Appendix A

3 DAA bnet

Let

$\kappa = (\sigma, \delta)$ = the drought kind, where $\sigma \in \{\text{MAM}, \text{JJAS}\}$ ¹ is the season, and $\delta \in \{\text{Moderate}, \text{Extreme}, \text{Severe}\}$ is the drought degree.

$I_\kappa = \mathbf{Impact}$ (i.e., **severity**) of drought is defined as minus SPI (higher rain, higher SPI, less severe drought)

$P(I_\kappa)$ = likelihood, probability that a drought of severity I_κ will occur in the near future (weeks to months), based on forecasts.

μ = ensemble member index

M = number of ensemble members, 51 for *ECMWF* (European Centre for Medium-Range Weather Forecasts)

$$Risk_\kappa = E[I_\kappa] = \frac{1}{M} \sum_{\mu=1}^M I_{\kappa,\mu} \quad (5)$$

$$= \sum_{I_\kappa} P(I_\kappa) I_\kappa \quad (6)$$

A **risk matrix** is a 4×4 matrix with X axis equal to impact (I) and Y axis equal to likelihood P , with I binned into four values and P binned into 4 values. The matrix elements give the value of some arbitrary function $f(I, P)$ defined as risk. Usually, $f(I, P) = IP$ but not necessarily. I find risk matrices arbitrary and not very useful. The Wikipedia article on risk matrices (Ref.[4]) agrees.

$\sigma \backslash \delta$	Moderate	Extreme	Severe
MAM	-0.55	-0.98	-0.99
JJAS	-0.41	-0.98	-0.99

Table 1: SPI threshold for Karamoja, Uganda. Cells give $-I_\kappa^*$, where $\kappa = (\sigma, \delta)$

I_κ^* = impact threshold for drought (See Table 1 for examples of I_κ^* .)

$$P(I_\kappa \geq I_\kappa^*) = \frac{1}{M} \sum_{\mu=1}^M \mathbb{1}(I_{\kappa,\mu} \geq I_\kappa^*) \quad (7)$$

P_κ^* = probability threshold for drought

C_κ = cost of drought

L_κ = loss of drought

$$P_\kappa^* = \frac{C_\kappa}{L_\kappa} \quad (8)$$

¹Letters here stand for the first letter of the months of the year.

T_κ = trigger for drought

$$T_\kappa = \mathbb{1} [P(\underline{I}_\kappa \geq I_\kappa^*) > P_\kappa^*] \quad (9)$$

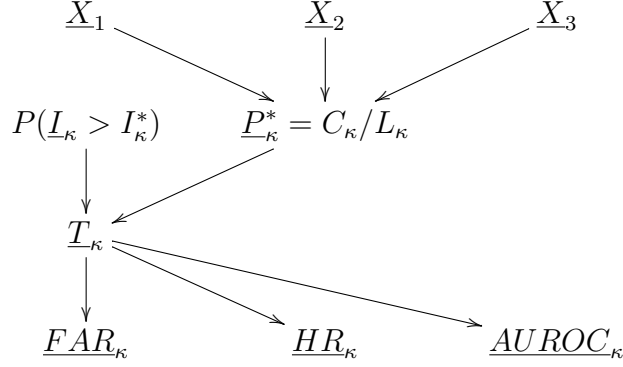


Figure 1: DAA bnet. We use one of these bnets for each κ value and for each grid cell of 0.25 degrees in latitude by 0.25 degrees in longitude. 1 degree in latitude or longitude is approximately 100 km.

Let $\underline{X}_1, \underline{X}_2, \dots$ represent local road density, population density, historical catastrophic events, etc.

The TPMs² printed in blue, for the bnet Fig.1, are as follows.³

$$P_\kappa^* = f_\kappa(X_1, X_2, X_3) \quad (10)$$

where $f_\kappa()$ is some deterministic function to be decided

$$T_\kappa = \mathbb{1}[P(\underline{I}_\kappa > I_\kappa^*) > P_\kappa^*] \quad (11)$$

$$P(Y_\kappa | T_\kappa) = \text{to be learned empirically from dataset} \quad (12)$$

where $Y_\kappa = FAR_\kappa, HR_\kappa, AUROC_\kappa$.

Algorithm for finding best triggers T_κ^* :

Enter bnet Fig.1 into bnet software such as PyAgrum (Ref.[1]. Enter into software available evidence for nodes X_1, X_2, X_3 and Y_κ . Allow software to infer the distribution of $\underline{T}_\kappa^* \in \{0, 1\}$. Choose for T_κ^* the state with maximum

²TPM=Transition Probability Matrix. This is the same thing as CPT=Conditional Probability Table

³A deterministic node satisfying the structural equation $y = f(x_1, x_2)$, has the TPM: $P(y|x_1, x_2) = \delta(y, f(x_1, x_2))$, where $\delta(a, b) = \mathbb{1}(a, b)$ is the Kronecker delta function.

probability.

A Appendix: Functions of $N_{x|a}$

Terminology Table Adapted from Wikipedia Ref.[3]

positive events (P): $N_{11} = \sum_x N_{x|1}$, the number of real positive events in the data

negative events (N): $N_{00} = \sum_x N_{x|0}$, the number of real negative events in the data

sensitivity, recall, true positive rate (TPR), or hit rate (**HR**):

$$TPR = R_{1|1} = \frac{N_{11}}{N_{11} + N_{01}} = 1 - R_{01} \quad (13)$$

specificity, selectivity or true negative rate (TNR):

$$TNR = R_{0|0} = \frac{N_{00}}{N_{00} + N_{01}} = 1 - R_{1|0} \quad (14)$$

precision or positive predictive value (PPV):

$$PPV = \frac{N_{11}}{N_{11} + N_{10}} = 1 - FDR \quad (15)$$

negative predictive value (NPV):

$$NPV = \frac{N_{00}}{N_{00} + N_{01}} = 1 - FOR \quad (16)$$

miss rate or false negative rate (FNR):

$$FNR = R_{0|1} = \frac{N_{01}}{N_{01} + N_{11}} = 1 - R_{1|1} \quad (17)$$

fall-out, false positive rate (FPR), or false alarm rate (**FAR**):

$$FPR = R_{1|0} = \frac{N_{10}}{N_{10} + N_{00}} = 1 - R_{0|0} \quad (18)$$

false discovery rate (FDR):

$$FDR = \frac{N_{10}}{N_{10} + N_{11}} = 1 - PPV \quad (19)$$

false omission rate (FOR):

$$FOR = \frac{N_{01}}{N_{01} + N_{00}} = 1 - NPV \quad (20)$$

accuracy (ACC):

$$ACC = \frac{N_{1|1} + N_{0|0}}{N_{1|1} + N_{0|0} + N_{1|0} + N_{0|1}} = \frac{N_{1|1} + N_{0|0}}{N_{1|1} + N_{0|0} + N_{1|0} + N_{0|1}} \quad (21)$$

balanced accuracy (BA):

$$BA = \frac{R_{1|1} + R_{0|0}}{2} \quad (22)$$

F1 score is the harmonic mean of precision and sensitivity:

$$F_1 = 2 \times \frac{PPV \times R_{1|1}}{PPV + R_{1|1}} = \frac{2N_{1|1}}{2N_{1|1} + N_{1|0} + N_{0|1}} \quad (23)$$

The area under the ROC curve, known as AUC or **AUROC**, is defined by Fig.2.

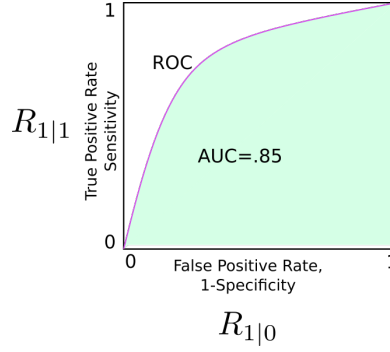


Figure 2: Example of ROC. Green shaded area is the AUC of the ROC.

References

- [1] Agrumery. PyArum, free open source app at github. <https://github.com/agrumery/aGrUM>.
- [2] Robert R. Tucci. Bayesuvius (free book). <https://github.com/rrtucci/Bayesuvius>.
- [3] Wikipedia. Receiver operating characteristic. https://en.wikipedia.org/wiki/Receiver_operating_characteristic.
- [4] Wikipedia. Risk matrix. https://en.wikipedia.org/wiki/Risk_matrix.