17/11/22

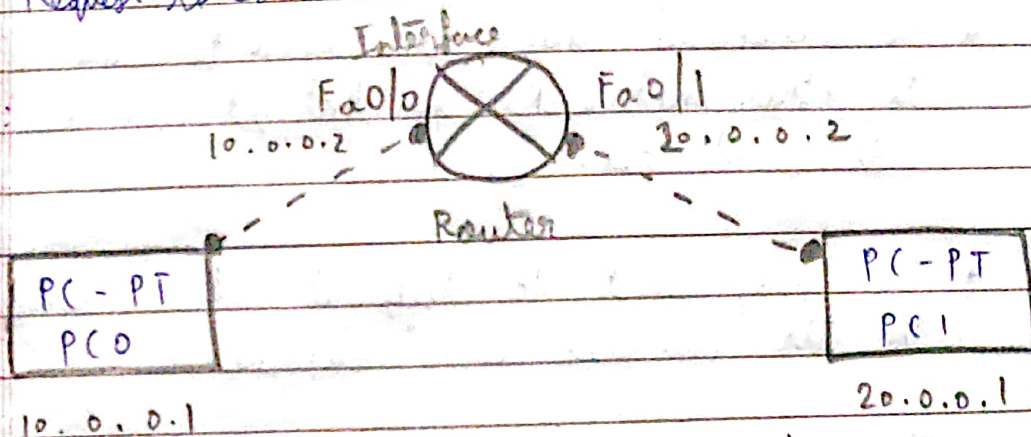## LAB - 2

AIM: Configuring IP address to routers in Packet tracer.
Explore: Ping responses, Destination unreachable, Reply,
Request timed out.

TOPOLOGY:

Interface
Fa0/0   Fa0/1
10.0.0.2   20.0.0.2

Router

PC - PT   PC - PT
PC0   PC1

10.0.0.1   20.0.0.1
Gateway: 10.0.0.2   Gateway: 20.0.0.2

PROCEDURE: A topology was created using 2 end devices
with different IP address configuration.

* Router was configured with respective interface
and IP.

* In end devices, we changed the gateway to
different IP address.

* In CMD, we will ping to other IP's connected
by router.

OBSERVATION Router CLI commands:

```
        enable
        config terminal
        interface Fa0/0
        ip address 10.0.02 255.0.0.0
        no shutdown
        exit
```

OBSERVATION: First we'll notice request timed out, because of ttl (time to leave) was 0, and whenever passed after that will be discarded.

* To overcome this, we need to give gateway to other networks so that it can access other end devices.

* The ping sent to different IP's and the ttl changes were observed.

* Only then the ping response will be successful.

RESULT: PC1> ping 10.0.0.2
Pinging 10.0.0.2 with 32 bytes of data:
Reply from 10.0.0.2 : bytes =32 time = 0 ms
Reply from 10.0.0.2 : bytes = 32 time = 0 ms
Reply from 10.0.0.2 : bytes =32 time = 0 ms
Reply from 10.0.0.2 : bytes = 32 time = 0 ms
ping statistics for 10.0.0.2
Packets : Sent = 4, Recieved = 4, lost = 0 (0% loss)

* Successful reply on pinging from one end device to different end device, only after specifying gateway, through a router network.

* Similarly, from PC1 we'll ping to 20.0.0.1 & 20.0.0.2, to get a successful reply.

* And also from PC2 we'll ping to 10.0.0.1, 20.0.0.2, 10.0.0.2, to get a successful reply.

* Without gateway, reply timed out occurs.

PC> ping 10.0.0.2
Pinging 10.0.0.2 with 32 bytes of data:
Reply from 10.0.0.2 : bytes =32
Request timed out.
Request timed out.
Request timed out.
Request timed out.
ping statistics for 10.0.0.2
Packets : Sent = 4, Recieved = 0, lost = 4 (100% loss)

This is for request timed out scenario,
when gateway is not specified.

Neelima
17/11/2022