

Lab 1: A Tensile Test on 1018 Steel and 6061 Aluminum

Nathan R. Lehnhof*
BYU Provo, UT

Lab 1 determines the value of the ultimate strength, yield strength, and the modulus of elasticity of Steel 1018 (cold rolled) and 6061 Aluminum by performing tensile tests. Ultimate strength is the maximum stress a material can withstand before noticeable necking. It's the peak point on the engineering stress-strain curve. Yield stress is the stress at which the material begins to noticeably plastically deform, generally at 0.002 strain. Young's Modulus of Elasticity is the measure of a material's stiffness, being the slope of the elastic region of the stress-strain graph.

I. Methods

To perform the tensile test, Steel 1018 and 6061 Aluminum "dog-bones" were placed in the tensile tester. The "dog-bones" had a diameter of 0.3 inches (0.0762 mm) and a gauge length of 2.3 inches (0.5842 mm). The tensile tester then gradually increases the tensile force experienced by the specimens, recording the force and the length of the specimen. The data was returned as an excel file. Because the tensile tester takes data so quickly, the last few data points of the file are after fracture, so those are manually removed. Similarly, the tensile tester secures the samples with clamps. That clamping produces an initial compressive force. Those points are also manually removed post-process.

$$\sigma = \frac{F}{A} \quad \text{Stress (MPa)} \quad (1)$$

$$\epsilon = \frac{\delta l}{l_0} \quad \text{Strain} \quad (2)$$

Since we need stress and strain, we use Equation 1 and Equation 2. From the Force (N) and diameter (mm), we find stress by dividing the force by the initial cross-sectional area. To find strain, we first need to normalize our length, taking the first length as 0.0. Then, we can use Equation 2 to find strain. We then graph stress-strain for both Steel 1018 and 6061 Aluminum. From these graphs, we can determine young's modulus, yield stress, and ultimate tensile stress as shown in the following tables.

II. Conclusion

We are more interested in the stress-strain curve than a force-displacement curve because stress and strain allows us to calculate yield stress, ultimate tensile stress, and young's modulus. A force and displacement graph only works for the specific geometry of the dog-bone. The stress-strain graph reflects the material properties that can be used with a range of geometries. The values calculated from the stress-strain graph can be used universally with that material.

True stress uses the instantaneous area. True strain uses the instantaneous change in length. While true stress/strain reflects the more accurate properties, true tests are more costly. Engineering stress and strain is sufficient for engineering purposes. A tensile test would be necessary for the following: Space Shuttle, Suspension Bridge hangers or Truss Members, Lifting Equipment, Fasteners under Tension, Cables for Elevators/Cranes. An engineer designing the cables on a suspension bridge would want to know the tensile properties of the cable material to ensure it can handle the expected loads. Similarly, an engineer designing a ship's anchor would want to know the tensile properties of the anchor chain.

Some potential sources of error include machine calibration (unlikely), misalignment of dog-bones (more likely since it would change the gauge length), and the machining of the dog-bones (introduce heat/properties into the material). Another important point is that this is only one sample. As the number of samples increases, the accuracy of our values will increase. We can most likely reduce error by increasing the number of tests and increasing consistency in machining the dog-bones.

*Mechanical Engineering

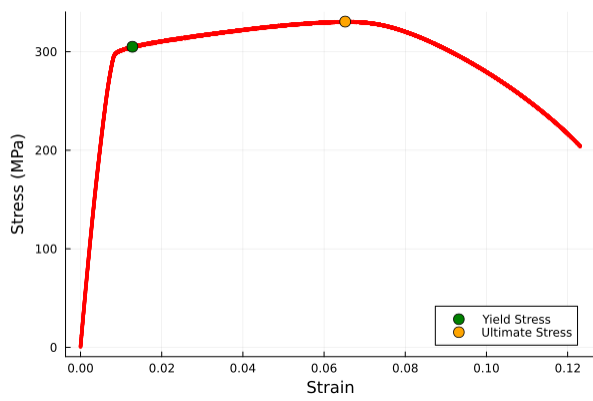


Fig. 1 Stress-strain curve for 6061 Aluminum.

6061 Aluminum	Expected	Actual
Ultimate Strength (MPa)	330	310
Yield Strength (MPa)	305	276
Modulus E (GPa)	69	54

Table 1 Mechanical properties of 6061 Aluminum.

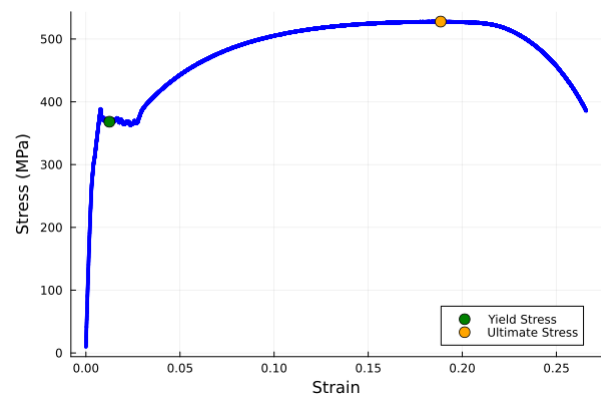


Fig. 2 Stress-strain curve for Steel 1018 Cold-Rolled.

Steel 1018	Expected	Actual
Ultimate Strength (MPa)	527	440
Yield Strength (MPa)	380	370
Modulus E (GPa)	217	200

Table 2 Mechanical properties of Steel 1018.