



#18.968 Entry Lock with skeleton key




#12.68K Levers Escutcheons for skeleton key



#18.90B strike plate for #968 series

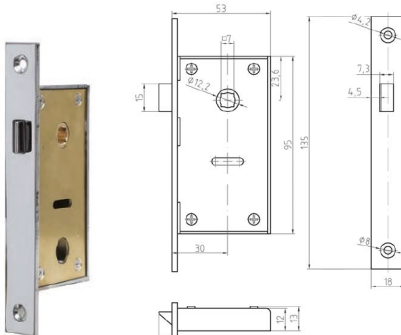


#18.68F Passage Latch

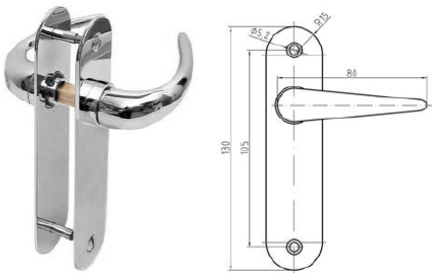

#12.68F Levers Escutcheons passage latch




#12.969 Knobs & Escutcheons set

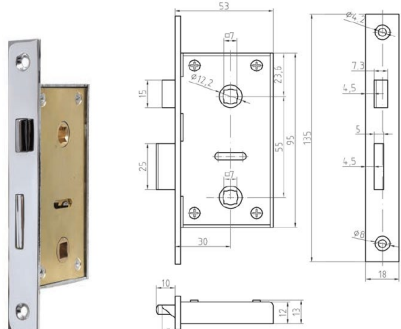


#18.68W Privacy Lock Thumb-turn/indicator



#12.68W Thumb-turn / Indicator Levers Escutcheons for Privacy Lock




#18.90B Strike plate for #968 series

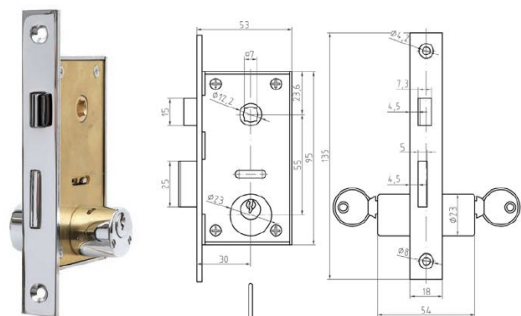


#18.68ZK Entry Lock Cylinder Key/Key



#12.68Z Levers Escutcheons for cylinder key



#12.90B strike plate for #968 series

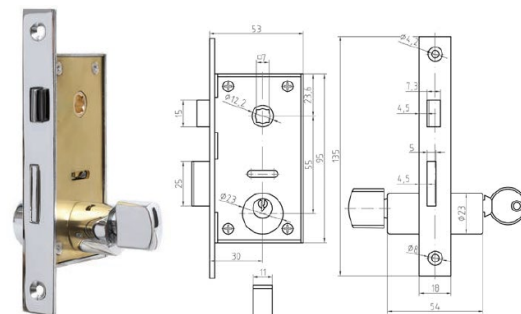

#18.68Z Entry Lock Cylinder Key/Knob



#12.68Z Levers Escutcheons for cylinder key




**Marine Mortise Lock Sets with 30 mm (1 3/16") Backset. Lock case 1/2" thick.  
For 1" (25 mm) thick doors. Polished Chrome Plated Brass**



GSV Trim set #12.968 Lever & Escutcheon

**GSV SET Complete Entry with skeleton key: #18.968K**

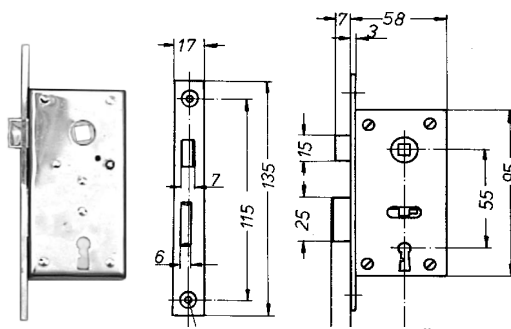


Entry Lock #18.968



GSV Lever set #12.68W

**GSV SET Complete Privacy thumb-turn/indicator: #18.968W**

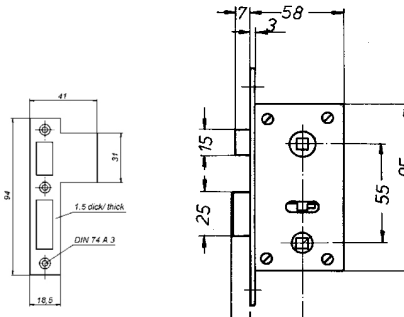


Privacy Lock #18.68W



GSV Lever set #12.68F

**GSV SET Complete passage function: #18.968F**

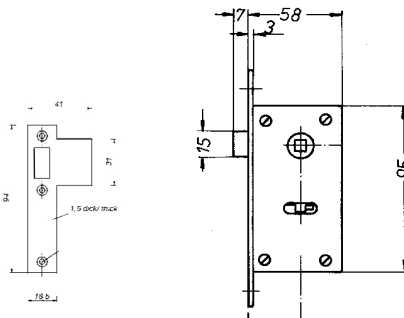

Passage lock #18.68F

Izerwaren  
Order  
numbers

- Mortise lock, backset 30 mm - 1 3/16"
- Minimum door thickness 19 mm - 3/4"
- Solid latch bolt
- With square corners on lock & strike plate
- Strike plate included with lock
- Trim not included
- Specify left or right hand and door thickness
- Specify finish:
  - BPC polished chrome plated brass
  - BSC satin chrome plated brass
  - BP polished brass

**18.968 Entry Mortise Lock with bit key (968)**  
Center spindle hole to center key hole: 55 mm

Case: 58 mm x 96 mm x 12 mm thick  
Front plate 135 x 17 mm  
7x7 mm spindle

**18.90B Strike plate**

**18.68W Privacy Mortise Lock (968WC)**  
Center spindle hole to center key hole: 55 mm

Case: 58 mm x 96 mm x 12 mm thick  
Front plate 135 x 17 mm  
7x7 mm spindle; 5x5 mm for thumb-turn

**18.90B Strike plate**

**18.68F Passage Mortise Lock (968F)**  
Case: 80 mm x 92 mm x 16 mm thick  
Front plate 150 x 25 mm  
7x7 mm spindle for lever handles

**18.91B Strike plate**

GSV trim fittings series #5968; 7x7 mm spindle

**Lever handles with Esc. Plates**

attached Lever handle: 80 x 35 mm

12.968 **Entry** with skeleton key  
12.68Z **Entry** with round cylinder  
12.68W **Privacy**  
12.68F **Passage**



Picture: #12.68Z entry lock with cylinder key; set with escutcheons and levers, strike plate. finish: polished chrome plated brass.