

Physics review sheet

Simon Wu

February 2021

Contents

1	Optics	2
1.1	Lensmaker's formula	2
1.2	Lens types	2
1.3	Sign convention	2
1.4	Combining lenses	2
1.4.1	Working with multiple lenses	2
1.4.2	As $d \rightarrow 0$	2
1.5	Magnification	3
1.6	Polarization	3
1.6.1	Malus' law	3
1.7	Double slit interference	3
1.7.1	Bright fringes	3
1.7.2	Bright fringes	3
1.8	Single slit interference (diffraction)	4
1.8.1	Bright fringes	4
1.8.2	Dark fringes	4
1.9	Thin-film interference	5
2	Electricity	6
2.1	Current	6
2.2	Resistors	6
2.2.1	Resistivity	6
2.2.2	Resistance of a conductor	6
2.2.3	Power dissipated by a resistor	6
2.2.4	Resistors in parallel	6
2.2.5	Resistors in series	7
2.3	Capacitors	7
2.3.1	Capacitance	7
2.3.2	Energy stored in a capacitor	7
2.3.3	Dielectric materials	7
2.3.4	Capacitors in parallel	8
2.3.5	Capacitors in series	8

2.3.6	Discharging a capacitor	8
2.3.7	Charging a capacitor	9
2.4	Inductors	9
3	Magnetism	10
3.1	Lorentz force law	10
3.2	Magnetic flux	10
3.2.1	Faraday's law	10
3.2.2	Lenz's law	10
3.2.3	Electromotive force in a coil	10
3.3	Magnetic induction from a current in a wire	11
3.3.1	Magnetic field at the centre of a coil	11
3.3.2	Magnetic field on the axis of a solenoid	11
3.3.3	Magnetic field from a straight wire	11
3.3.4	Magnetic field from an infinitely long wire	11
3.4	Cyclotron concepts	11
3.4.1	Radius of motion of a particle in a magnetic field	11
3.4.2	Angular frequency	11
3.4.3	Cyclotron frequency	11
4	Special relativity	12
4.1	Rapidity	12
4.1.1	Hyperbolic identities	12
4.2	Length contraction	12
4.3	Time dilation	12
4.4	Mass dilation	12
4.5	Velocity addition	12
4.6	Energy	13
4.6.1	Energy at low speeds	13
4.6.2	Energy in a different frame	13
4.7	Momentum	13
4.7.1	Momentum at low speeds	13
4.7.2	Momentum in a different frame	13
4.8	Special relativity but with Lorentz factors	14
4.8.1	The Lorentz factor	14
4.8.2	Energy	14
4.8.3	Momentum	14
4.8.4	Length contraction	14
4.8.5	Time dilation	14
5	Quantum mechanics	15
5.1	de Broglie wavelength	15
5.2	Photoelectric effect	15
5.3	Electron states	15
5.3.1	Rydberg constant	15

6	Thermodynamics	16
6.1	Linear thermal expansion	16
6.1.1	Areal and volumetric expansion	16
6.2	Heat transfer	16
6.2.1	Slabs in series	16
6.2.2	Slabs in parallel	17
6.3	Newton's law of cooling for convection	17
6.4	Stefan-Boltzmann formula for radiation	17
6.5	Wien's law for blackbody radiation	17
6.6	Gas properties	18
6.6.1	Ideal gas law	18
6.6.2	Gas density	18
6.6.3	Gas velocities	18
6.7	Internal energy	18
6.7.1	Specific heats	19
6.8	First law of thermodynamics	19
6.9	Entropy	19
6.10	Thermodynamic processes	20
6.10.1	Isobaric	20
6.10.2	Isochoric	20
6.10.3	Isothermal	20
6.10.4	Adiabatic	20
6.11	Heat engines	21
6.11.1	Thermodynamic efficiency	21
6.11.2	Carnot cycle	21
6.11.3	Sterling cycle	21
6.11.4	Otto cycle	21
7	Material properties	22
7.1	Stress and strain	22
7.2	Young's modulus	22
7.3	Shear modulus	22
7.4	Bulk modulus	22
7.5	Poisson's ratio	22
7.6	Moduli relations	23
7.7	Radioactive decay law	23
7.7.1	Half-life	23
7.7.2	Nuclear reaction notation	23
8	Waves	24
8.1	Universal wave equation	24
8.2	Basic wave equation	24
8.3	Intensity of a sound	24
8.3.1	Decibels and intensity measurement	24
8.4	Simple harmonic motion	25

8.5	Sound waves in pipes	25
8.5.1	Open pipes	25
8.5.2	Pipes closed on one end	25
8.6	Waves on a stretched wire	26
8.6.1	Wave speed	26
8.6.2	Frequency	26
8.7	Doppler effect	26
9	Fluids	27
9.1	Jargon	27
9.2	Continuity of flow	27
9.3	Bernoulli's equation	27
9.4	Torricelli's theorem	27
9.5	Reynold's number and stability	28
9.6	Poiseuille's method for determining viscosity	28
9.7	Drag force	28
9.7.1	Terminal velocity	28

1 Optics

1.1 Lensmaker's formula

Given an object distance p , image distance q and focal length f :

$$\frac{1}{f} = \frac{1}{p} + \frac{1}{q}$$

1.2 Lens types



Converging Lens:
Focal point behind lens
 f is positive (f more than 0)




Diverging Lens:
Focal point in front of lens
 f is negative (f less than 0)

1.3 Sign convention

	Front of lens	Behind lens
f	Negative (-)	Positive (+)
p	Positive (+)	Negative (-)
q	Negative (-)	Positive (+)

1.4 Combining lenses

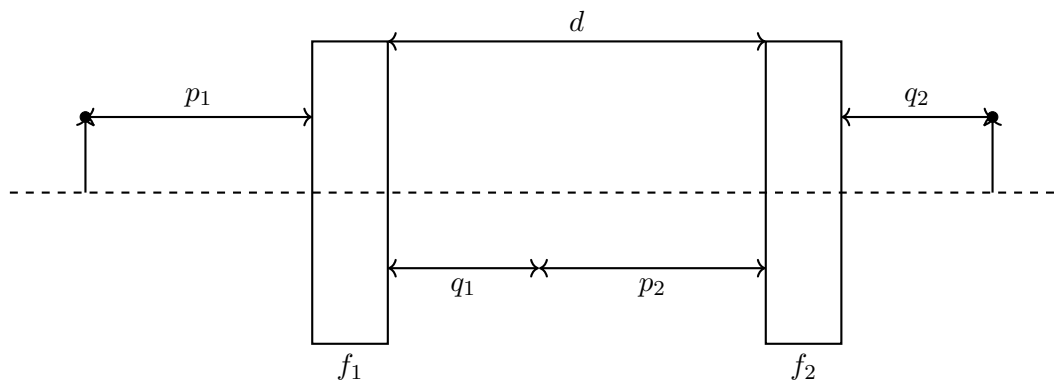

1.4.1 Working with multiple lenses

$$\frac{1}{d - q_1} + \frac{1}{q_2} = \frac{1}{f_2}$$

1.4.2 As $d \rightarrow 0$

$$\frac{1}{f_{\text{eff}}} = \frac{1}{f_1} + \frac{1}{f_2}$$

Two lenses stuck together ($d \approx 0$) may be treated as a single lens with a new effective focal length f_{eff} .

1.5 Magnification

Linear magnification is based on the object and image distances p and q :

$$M = \frac{h'}{h} = -\frac{q}{p}$$

If $h' < 0$, the image is inverted.

1.6 Polarization

The intensity of light passing through a polarizing sheet is one half of the intensity of the light incident to the sheet:

$$I' = \frac{I}{2}$$

1.6.1 Malus' law

If the light then passes through another polaroid that is at an angle θ to the first polaroid, then the intensity is related to the square of the cosine of the angle:

$$I'' = \frac{I}{2} \cos^2(\theta)$$

1.7 Double slit interference

1.7.1 Bright fringes

Bright fringes on the screen are evenly spaced. Given wavelength of light λ , width of gap between slits d and distance from screen L :

$$y_n = \frac{n\lambda L}{d}$$

n is an integer (1, 2, 3...)

1.7.2 Dark fringes


Dark fringes on the screen are also evenly spaced. Given wavelength of light λ , width of gap between slits d and distance from screen L :

$$y_n = \left(n + \frac{1}{2}\right) \frac{\lambda L}{d}$$

n is an integer (1, 2, 3...)

1.8 Single slit interference (diffraction)

Diffraction is the rounding of a wavefront as it moves through a small opening, especially an opening that is much smaller than its wavelength.

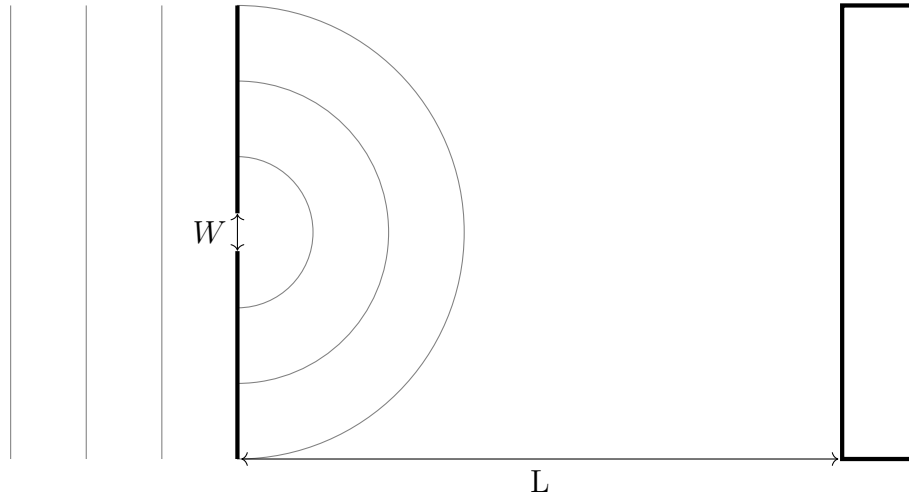

1.8.1 Bright fringes

Bright fringes on the screen are evenly spaced. Given wavelength of light λ , width of gap W and distance from screen L :

$$y_m = \left(m + \frac{1}{2}\right) \frac{\lambda L}{W}$$

m is an integer (1, 2, 3...)

1.8.2 Dark fringes

Dark fringes on the screen are also evenly spaced, and between the light fringes. Given wavelength of light λ , width of gap W and distance from screen L :

$$y_m = \frac{m\lambda L}{W}$$

Notice that the pattern is very similar to the double-slit interference pattern, but reversed between the dark and bright fringes.

1.9 Thin-film interference

2 Electricity

2.1 Current

Conventional current is the rate at which positive charges flow through a wire:

$$I = \frac{dQ}{dt}$$

It is also defined as the flux of charge density flowing past a surface (like the cross-section of a wire):

$$I = \int \vec{J} \cdot d\vec{A}$$

2.2 Resistors

2.2.1 Resistivity

Resistivity of a material is proportional to the electric field and current density:

$$\vec{E} = \rho \vec{J}$$

Electric field is in newtons per coulomb, charge density in amperes per meter squared, and resistivity in ohms per meter.

2.2.2 Resistance of a conductor

Resistance of a conductor is proportional to resistivity ρ and length L and inversely proportional to cross-sectional area A :

$$R = \rho \frac{L}{A}$$

2.2.3 Power dissipated by a resistor

The power P dissipated by a resistor of resistance R , given a potential difference V and a current I across the resistor:

$$P = IV = \frac{V^2}{R} = I^2 R$$

2.2.4 Resistors in parallel

The equivalent resistance R_{eq} , given N resistors with resistances $R_1, R_2 \dots R_N$ in parallel:

$$\frac{1}{R_{eq}} = \frac{1}{R_1} + \frac{1}{R_2} + \dots \frac{1}{R_N}$$

2.2.5 Resistors in series

The equivalent resistance R_{eq} , given N resistors with resistances $R_1, R_2 \dots R_N$ in series:

$$R_{eq} = R_1 + R_2 + \dots + R_N$$

2.3 Capacitors

A parallel-plate capacitor creates a potential difference between 2 plates by transferring charges between the plates when connected to a battery. This stores energy in the capacitor that can be used later.

2.3.1 Capacitance

The plates of a capacitor will develop a charge of Q and $-Q$. The relation between the charge on the plates and the potential difference is the capacitance:

$$C = \frac{Q}{\Delta V} \text{ or } Q = C\Delta V$$

The units of capacitance are farads, which are coulombs per volt. ($F = C/V$)

If the potential difference is considered in terms of the electric field E and distance d between the plates, and the charge is considered in terms of charge density σ and area A of the plates:

$$C = \frac{\sigma A}{Ed} = \frac{\sigma A}{(\sigma/\epsilon_0)d} = \epsilon_0 \frac{A}{d}$$

2.3.2 Energy stored in a capacitor

Given that a capacitor has a potential difference V across it and is storing Q :

$$U_c = \frac{1}{2} \frac{Q^2}{C} = \frac{1}{2} QV = \frac{1}{2} CV^2$$

2.3.3 Dielectric materials

A dielectric reduces the electric field within it by a factor of κ :

$$\kappa = \frac{E_0}{E}$$

It can also be viewed as increasing effective permittivity:

$$\epsilon = \kappa\epsilon_0$$

Dielectric materials amplify capacitance by a factor of κ :

$$C = \kappa C_0$$

2.3.4 Capacitors in parallel

The potential difference across capacitors in parallel will be the same. The equivalent capacitance C_{eq} , given N capacitors C_1, C_2, \dots, C_N in parallel:


$$C_{eq} = C_1 + C_2 + \dots + C_N$$

2.3.5 Capacitors in series

The total voltage (potential difference) across capacitors in series must be the sum of the voltages across each of them. The charges stored in each of the capacitors must also be the same! From this, given N capacitors C_1, C_2, \dots, C_N in series:

$$\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2} + \dots + \frac{1}{C_N}$$

2.3.6 Discharging a capacitor



Considering a capacitor charged to $V_c = Q_{tot}/C$ and a resistor R : as current flows, the charge on the capacitor decreases, and the current decreases, until the capacitor is fully discharged and the current stops flowing. We can apply Kirchhoff's Voltage Law:

$$V_c - IR = 0 \rightarrow -\frac{Q}{C} - R \frac{dQ}{dt} = 0 \rightarrow \frac{dQ}{dQ} = -\frac{dt}{RC}$$

Solving that differential equation, you obtain the expression of charge across the capacitor, which is time-dependent:


$$Q(t) = Q_0 e^{-t/\tau}$$

Q_0 is the initial capacitor charge Q_{tot} , and $\tau = RC$, which is called the time constant. Taking the derivative of $Q(t)$ to derive the current through the circuit:

$$I(t) = \frac{dQ}{dt} = I_0 e^{-t/\tau}$$

I_0 is the initial current at $t = 0$. It is given by $Q_{tot}/\tau = Q_{tot}/RC$.

2.3.7 Charging a capacitor



Now, consider the case where there is now a battery in the circuit. We can again apply Kirchhoff's Voltage Law:

$$\boxed{V - R \frac{dQ}{dt} - \frac{Q}{C} = 0} \rightarrow \boxed{\frac{dQ}{CV - Q} = -\frac{dt}{RC}}$$

Integrating and then exponentiating:

$$\boxed{CV - Q = e^K e^{-t/RC}}$$

When $t = 0$, charge across the capacitor Q is also 0:

$$\boxed{e^K = CV = Q_{\text{tot}}}$$

Therefore, we can find that the charge across the capacitor is time-dependent again:

$$\boxed{Q(t) = Q_{\text{tot}}(1 - e^{-t/\tau})}$$

Once again, we can differentiate to find the current through the circuit, which is actually identical to when it is discharging:

$$\boxed{I(t) = \frac{dQ}{dt} = I_0 e^{-t/\tau}}$$

The time constant τ is the same as when the capacitor is being discharged. Initial current I_0 is given by $Q_{\text{tot}}/\tau = V/R$, which makes sense.

2.4 Inductors

3 Magnetism

3.1 Lorentz force law

The force acting on a charged particle q in an electric field \vec{E} and magnetic field \vec{B} and moving with velocity \vec{v} :

$$\vec{F} = q \left(\vec{E} + \vec{v} \times \vec{B} \right)$$

3.2 Magnetic flux

Magnetic flux through a wire loop of area \vec{A} in a field \vec{B} that is making an angle θ perpendicular to the loop, in units of weber:

$$\phi_B = \int \vec{B} \cdot d\vec{A}$$

Simplifies when the magnetic field is constant over the area of the wire loop:

$$\phi_B = \vec{B} \cdot \vec{A}$$

$$\phi_B = BA \cos(\theta)$$

3.2.1 Faraday's law

Faraday's law states that electromotive force is induced in a conductor when there is a change in the number of field lines passing through it, or when it cuts across field lines. The electromotive force ε induced in a wire loop is the rate of change of flux through it.

$$\varepsilon = -\frac{d\phi_B}{dt} = -\frac{\Delta\phi_B}{\Delta t}$$

3.2.2 Lenz's law

Lenz's law states that induced current will appear in such a direction that it opposes the change that produced it. For example, if the area of a loop of wire in a magnetic field coming out of the page is decreasing, the magnetic flux through the loop is decreasing: induced current will appear such that it counteracts that decrease, indicating that the current will be counterclockwise (inducing more field out of the page inside the loop).

3.2.3 Electromotive force in a coil

Given a coil of N turns:

$$\varepsilon = -N \frac{\Delta\phi_B}{\Delta t}$$

3.3 Magnetic induction from a current in a wire

3.3.1 Magnetic field at the centre of a coil

Given a coil of N turns, radius r and carrying current i :

$$B = \frac{\mu_0 N i}{2r}$$

3.3.2 Magnetic field on the axis of a solenoid

Given a solenoid of N turns over an axial length l :

$$B = \frac{\mu_0 N i}{l}$$

3.3.3 Magnetic field from a straight wire

At a distance r from a wire carrying current i , with the position subtending angles θ_1 and θ_2 from the ends of the wire”

$$B = \frac{\mu_0 i}{4\pi r} (\cos(\theta_1) + \cos(\theta_2))$$

3.3.4 Magnetic field from an infinitely long wire

Given that our wire is now infinitely long, meaning that $\theta_1 \rightarrow 0$ and $\theta_2 \rightarrow 0$:

$$B = \frac{\mu_0 i}{2\pi r}$$

3.4 Cyclotron concepts

3.4.1 Radius of motion of a particle in a magnetic field

Assuming that a field B acts perpendicularly to the plane of orbit of a particle q and mass m moving with velocity v :

$$r = \frac{mv}{qB}$$

3.4.2 Angular frequency

$$\omega = \frac{v}{r} = \frac{qB}{m}$$

3.4.3 Cyclotron frequency

$$f = \frac{\omega}{2\pi} = \frac{qB}{2\pi m}$$

4 Special relativity

4.1 Rapidity

Given a frame of reference that moves at a velocity v , and a variable β defined as $\frac{v}{c}$, and where ζ is the rapidity:

$$\tanh(\zeta) = \beta$$

4.1.1 Hyperbolic identities

$$\cosh(\zeta) = \frac{1}{\sqrt{1 - \beta^2}} = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}} \quad \sinh(\zeta) = \frac{\beta}{\sqrt{1 - \beta^2}} = \frac{\frac{v}{c}}{\sqrt{1 - \frac{v^2}{c^2}}} \quad \tanh(\zeta) = \frac{\sinh(\zeta)}{\cosh(\zeta)}$$

$$\cosh^2(\zeta) - \sinh^2(\zeta) = 1$$

4.2 Length contraction

Given a speed v , and a proper length (at rest) of L :

$$L' = \frac{L}{\cosh(\zeta)} = L\sqrt{1 - \beta^2} = L\sqrt{1 - \frac{v^2}{c^2}}$$

4.3 Time dilation

Given a speed v , and a proper time (at rest) of $\Delta\tau$:

$$\Delta\tau' = \Delta\tau \cosh(\zeta) = \frac{\Delta\tau}{\sqrt{1 - \beta^2}} = \frac{\Delta\tau}{\sqrt{1 - \frac{v^2}{c^2}}}$$

4.4 Mass dilation

Given a rest mass m and a frame moving at v :

$$m' = m \cosh(\zeta) = \frac{m}{\sqrt{1 - \beta^2}} = \frac{m}{\sqrt{1 - \frac{v^2}{c^2}}}$$

4.5 Velocity addition

Given an object moving at v_0 (rapidity ζ_0) in a frame S , and a frame S' moving at a speed v (rapidity ζ) relative to S , the speed (v'_0) and rapidity (ζ'_0) in S' can be found:

$$\zeta'_0 = \zeta_0 - \zeta \quad \text{or} \quad v'_0 = \frac{v_0 - v}{1 - \frac{v_0 v}{c^2}}$$

4.6 Energy

Given a particle of rest mass m_0 moving at v_0 :

$$\text{Total Energy} = E = m_0 c^2 \cosh(\zeta_0) = \frac{m_0 c^2}{\sqrt{1 - \beta^2}} = \frac{m_0 c^2}{\sqrt{1 - \frac{v_0^2}{c^2}}}$$

4.6.1 Energy at low speeds

If $\left|\frac{v_0}{c}\right| \ll 1$, we can use a Taylor expansion like $(1 + x)^\alpha = 1 + \alpha x + O(x^2)$ to recover Newtonian kinetic energy:

$$E = m_0 c^2 + \frac{1}{2} m_0 v_0^2 + O\left(\frac{m v_0^4}{c^2}\right)$$

The term $m_0 c^2$ is the rest energy, and $\frac{1}{2} m_0 v_0^2$ is Newtonian kinetic energy.

4.6.2 Energy in a different frame

Given a frame of rapidity ζ_0 and another frame of relative rapidity ζ :

$$E' = m_0 c^2 \cosh(\zeta_0 - \zeta) = m_0 c^2 \cosh(\zeta'_0) \text{ where } \zeta'_0 = \zeta_0 - \zeta$$

4.7 Momentum

Given a particle of rest mass m_0 moving at v_0 :

$$p = m_0 c \sinh(\zeta_0) = \frac{m_0 c \beta}{\sqrt{1 - \beta^2}} = \frac{m_0 v_0}{\sqrt{1 - \frac{v_0^2}{c^2}}}$$

4.7.1 Momentum at low speeds

If $\left|\frac{v_0}{c}\right| \ll 1$, we can use a Taylor expansion like $(1 + x)^\alpha = 1 + \alpha x + O(x^2)$ to recover Newtonian momentum:

$$p = m_0 v_0 + O\left(\frac{m v_0^3}{c^2}\right)$$

4.7.2 Momentum in a different frame

Given a frame of rapidity ζ_0 and another frame of relative rapidity ζ :

$$p' = m_0 c \sinh(\zeta_0 - \zeta) = m_0 c \sinh(\zeta'_0) \text{ where } \zeta'_0 = \zeta_0 - \zeta$$

4.8 Special relativity but with Lorentz factors

4.8.1 The Lorentz factor

The Lorentz factor is represented by γ .

$$\gamma = \frac{1}{\sqrt{1 - \beta^2}} = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}}$$

4.8.2 Energy

The total energy E of an object, given its rest mass m :

$$E = \gamma mc^2$$

The rest energy that an object always possesses:

$$E_0 = mc^2$$

The kinetic energy of an object:

$$K = E - E_0 = \gamma mc^2 - mc^2 = (\gamma - 1)mc^2$$

Total energy of an object can also be found in relation to its momentum:

$$E^2 = p^2 c^2 + m^2 c^4$$

4.8.3 Momentum

Given that an object is moving at relativistic speeds:

$$p = \gamma mv$$

4.8.4 Length contraction

Given the proper length L in a frame of reference, and an observed time of L' from a moving observer in another inertial frame of reference:

$$L' = \frac{L}{\gamma}$$

4.8.5 Time dilation

Given the proper time t in a frame of reference, and an observed time of t' from a moving observer in another inertial frame of reference:

$$t' = \gamma t$$

5 Quantum mechanics

5.1 de Broglie wavelength

5.2 Photoelectric effect

5.3 Electron states

5.3.1 Rydberg constant

6 Thermodynamics

6.1 Linear thermal expansion

Given a length L_0 at some temperature, a change in temperature of ΔT and a coefficient of linear expansion α , the expanded length is given by:

$$L = L_0(1 + \alpha\Delta T)$$

6.1.1 Areal and volumetric expansion

α can also be replaced with the coefficient of areal expansion $\beta = 2\alpha$ and the coefficient of volumetric expansion $\gamma = 3\alpha$.


$$A = A_0(1 + \beta\Delta T) \text{ and } V = V_0(1 + \gamma\Delta T)$$

6.2 Heat transfer

Heat conduction through a slab with thickness of d , area A and thermal conductivity k_1 with one side at temperature T_1 and the other at T_2 is given by:

$$-\frac{dQ}{dt} = k_1 A \left(\frac{T_1 - T_2}{d} \right)$$

6.2.1 Slabs in series

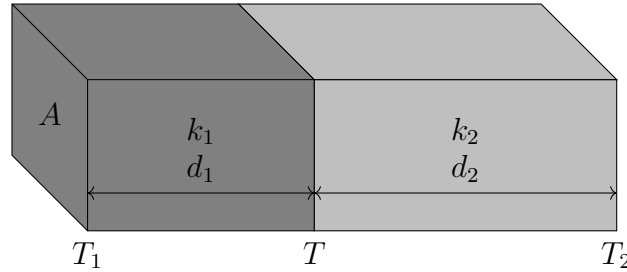


Given n slabs placed in series, with the leftmost temperature begin T_1 and rightmost temperature T_2 , the equivalent conductivity of the system of slabs is given by:

$$k_{eq} = \frac{\sum_{i=1}^n d_i}{\sum_{i=1}^n \frac{d_i}{k_i}} \text{ With two slabs, } k_{eq} = \frac{d_1 + d_2}{\left(\frac{d_1}{k_1}\right) + \left(\frac{d_2}{k_2}\right)}$$

When there are two slabs, the interface temperature T is given by:

$$T = \frac{\frac{k_1 T_1}{d_1} + \frac{k_2 T_2}{d_2}}{\frac{k_1}{d_1} + \frac{k_2}{d_2}}$$

6.2.2 Slabs in parallel

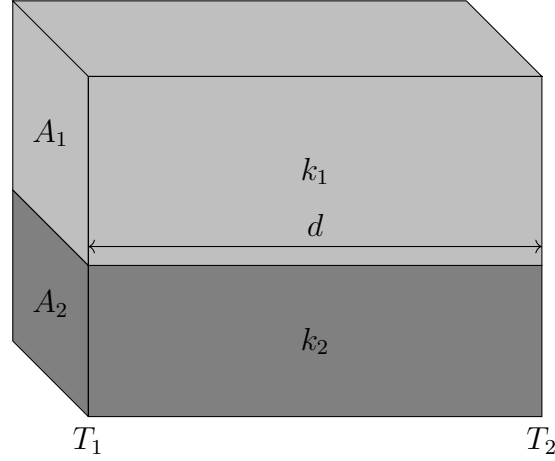

The rate of flow of heat in a system of n parallel slabs:

$$-\frac{dQ}{dt} = \frac{T_1 - T_2}{d} \sum_{i=1}^n k_i A_i$$

The equivalent thermal conductivity of the system of parallel slabs:

$$k_{eq} = \frac{\sum k_i A_i}{\sum A_i}$$

6.3 Newton's law of cooling for convection

Given a mean temperature of θ , a room temperature of θ_0 and a constant C :

$$-\frac{d\theta}{dt} = C(\theta - \theta_0)$$

6.4 Stefan-Boltzmann formula for radiation

Given a radiator of area A , an absolute temperature T_1 of the radiator, a surrounding absolute temperature of T_2 and the Stefan-Boltzmann constant σ :

$$-\frac{dE}{dt} = \sigma A (T_1^4 - T_2^4)$$

6.5 Wien's law for blackbody radiation

Given the maximum-intensity wavelength of blackbody radiation λ_m at absolute temperature T :

$$\lambda_m T = b = 4 \times 10^{-3} m \cdot K$$

6.6 Gas properties

6.6.1 Ideal gas law

The ideal gas law states that in an ideal gas, given pressure P in Pascal ($\frac{\text{N}}{\text{m}^2}$), volume V , amount of substance n (in moles), absolute temperature T and the ideal gas constant R ($R = N_A \cdot k_b$, where Avagadro's constant $N_A = 6.022 \times 10^{23}$ and the Boltzmann constant $k_b = 1.381 \times 10^{-23} \text{J/K}$):

$$\boxed{PV = nRT}$$

By stating $k_b = R/N_A$ and number of molecules $N = n \cdot N_A$, ideal gas law is restated as:

$$\boxed{PV = NkT}$$

6.6.2 Gas density

Given a particuler gas with density ρ , pressure P and absolute temperature T :

$$\boxed{\frac{\rho_1 T_1}{P_1} = \frac{\rho_2 T_2}{P_2}}$$

6.6.3 Gas velocities

Most probable speed:

$$\boxed{v_p = \sqrt{\frac{2kT}{m}}}$$

Average speed:

$$\boxed{\langle v \rangle = \sqrt{\frac{8kT}{\pi m}}}$$

Root-mean-square speed:

$$\boxed{\sqrt{\langle v^2 \rangle} = \sqrt{\frac{3kT}{m}}}$$

6.7 Internal energy

Internal energy U , given the constant volume heat capacity c_v and absolute temperature T :

$$\boxed{U = nc_v RT}$$

c_v is $\frac{3}{2}R$ for monatomic gases, and $\frac{5}{2}R$ for diatomic gases.

6.7.1 Specific heats

Specific heat varies with the conditions that the gas is in: the heat capacity of the gas in a container that expands with heat (constant pressure) is often much higher than when it's heated in a closed container that doesn't expand (constant volume).

Constant volume specific heat is c_v , and constant pressure specific heat is c_p . The heat capacity ratio γ , given c_p and c_v :

$$\gamma = \frac{c_p}{c_v}$$

The heat capacity ratio γ depends on the degrees of freedom f of the molecules of a gas:

$$\gamma = 1 + \frac{2}{f}$$

This can be reversed as well, to determine degrees of freedom of a gas from the specific heat ratio:

$$f = \frac{2}{\gamma - 1}$$

For a monatomic gas with 2 degrees of freedom:

$$\gamma_{monatomic} = \frac{5}{3}$$

For a diatomic gas with 5 degrees of freedom at room temperature:

$$\gamma_{diatomic} = \frac{7}{5}$$

6.8 First law of thermodynamics

Given ΔQ is the change in heat, W is the work done by the system in a process and ΔU is the change in internal energy of the system:

$$\Delta Q = \Delta U + W$$

Internal energy U of a system tends to increase when energy is added as heat and tends to decrease if energy is lost as work done by the system.

6.9 Entropy

Change in entropy ΔS , given a change in heat dQ and a temperature T :

$$\Delta S = \int \frac{dQ}{T}$$

6.10 Thermodynamic processes

6.10.1 Isobaric

In isobaric processes, **pressure** remains constant: $\Delta P = 0$. The work done by the system in an isobaric process is given by:

$$W = \int P dV = P(V_1 - V_2) = P \cdot \Delta V$$

Using ideal gas law:

$$W = P \cdot \Delta V = nR\Delta T$$

6.10.2 Isochoric

In an isochoric process, **volume** remains constant. No pressure-volume work is done because the volume remains constant ($Q = P \cdot \Delta V$, $\Delta V = 0$). This means that any change in heat comes from change in internal energy ($\Delta Q = \Delta U$).

6.10.3 Isothermal

In an isothermal process, **temperature** remains constant. There will be no change in internal energy, so $\Delta Q = W$.

$$W_{\text{env}} = nRT \ln \left(\frac{V_2}{V_1} \right)$$

6.10.4 Adiabatic

In an adiabatic process, heat remains constant. This means that there will be no ΔQ , and that $dU = -dW$.

$$W = \frac{1}{\gamma - 1} (P_2 V_2 - P_1 V_1)$$

For an ideal gas undergoing an adiabatic process (adiabatic expansion, etc.), it can also be shown that:

$$PV^\gamma = \text{constant}$$

6.11 Heat engines

6.11.1 Thermodynamic efficiency


The efficiency e of a cycle:

$$e = \frac{\text{Work done by gas}}{\text{Heat put into system}} = \boxed{\frac{W}{Q_{in}}}$$

6.11.2 Carnot cycle

The Carnot cycle is the ideal thermodynamic cycle: it consists of two isothermal processes and two adiabatic processes. Given a hot reservoir temperature of T_H and a cold reservoir temperature of T_C :

$$e = 1 - \frac{T_C}{T_H} = 1 - \frac{Q_C}{Q_H}$$

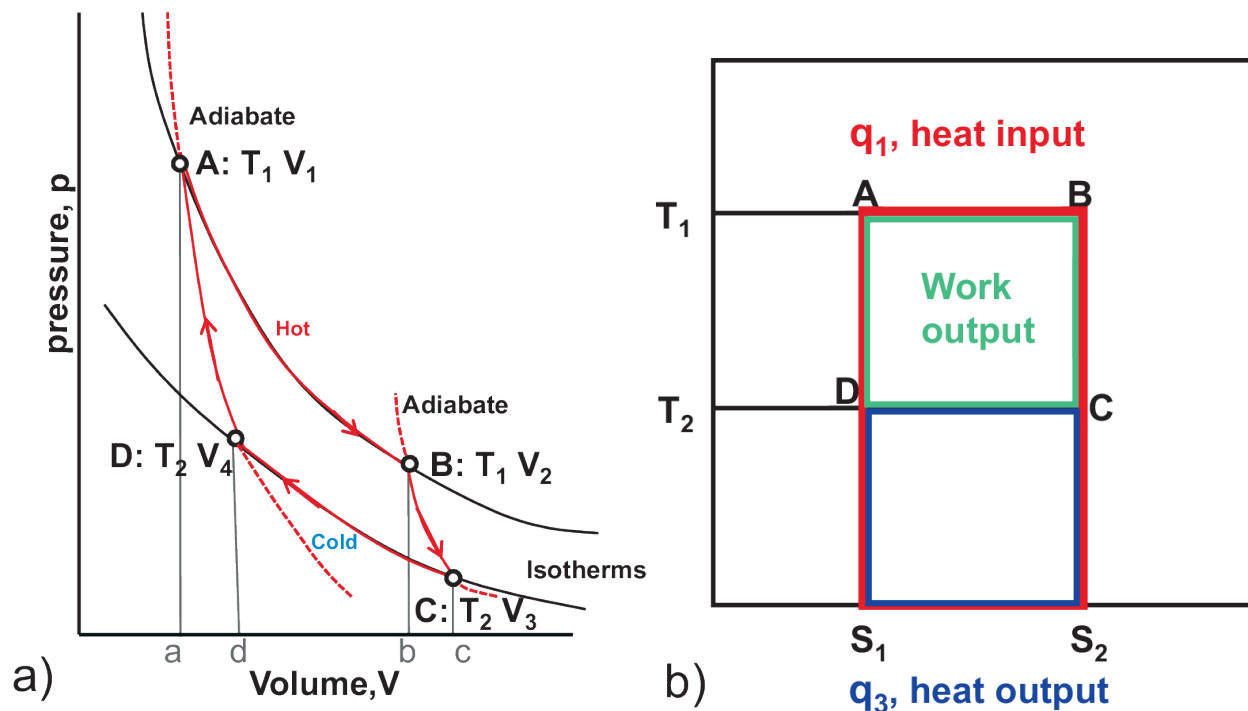

$A \rightarrow B$ and $C \rightarrow D$ are isothermal processes, and $B \rightarrow C$ and $D \rightarrow A$ are adiabatic processes. As T_C is lowered and T_H is raised, the efficiency of the heat engine increases.

6.11.3 Sterling cycle

The Sterling cycle consists of two isothermal processes and two isochoric processes.

6.11.4 Otto cycle

The Otto cycle consists of two adiabatic processes and two isochoric processes.

7 Material properties

7.1 Stress and strain

Stress is applied force over an area.

$$\text{Stress} = \frac{F}{A}$$

Strain is the change in length over the original length.

$$\text{Strain} = \frac{\Delta L}{L}$$

7.2 Young's modulus

The Young's modulus Y , given the stress and strain:

$$Y = \frac{\text{Stress}}{\text{Strain}} = \frac{FL}{A\Delta L}$$

7.3 Shear modulus

The shear modulus η , given shear stress and shear strain ($\Delta x/y$):

$$\eta = \frac{\text{Shear stress}}{\text{Shear strain}} = \frac{Fy}{A\Delta x}$$

7.4 Bulk modulus

Bulk modulus K is related to the pressure increment with volume strain ($\Delta V/V$):

$$K = \frac{\text{Pressure increment}}{\text{Volume strain}} = \frac{\Delta P}{-\Delta V/V}$$

7.5 Poisson's ratio

Poisson's ratio relates transverse and axial strain to each other. For example, if you strain some rubber by compressing it, it will tend to stretch axially. Poisson's ratio σ is related to the ratio of lateral and longitudinal strain:

$$\sigma = -\frac{\text{strain}_{\text{transverse}}}{\text{strain}_{\text{axial}}}$$

7.6 Moduli relations

The elastic moduli are related in various ways.

$$Y = \frac{9\eta K}{3K + \eta}$$

$$Y = 2\eta(1 + \sigma)$$

$$Y = 3K(1 - 2\sigma)$$

$$\sigma = \frac{2K - 2\eta}{6K + 2\eta}$$

7.7 Radioactive decay law

The probability per unit time that a nucleus will decay is a constant, independent of time. That constant is the decay constant λ .

Given N_0 molecules with decay constant λ , the amount of molecules $N(t)$ is given by the radioactive decay law:

$$N = N_0 e^{-\lambda t}$$

7.7.1 Half-life

The half-life $T_{1/2}$ of a material is the amount of time it would take for half of the molecules in that material to decay. This means that:

$$\frac{N_0}{2} = N_0 e^{-\lambda T_{1/2}}$$

$$e^{-\lambda T_{1/2}} = \frac{1}{2}$$

$$-\lambda T_{1/2} = \ln\left(\frac{1}{2}\right) = -\ln(2)$$

$$\lambda = \frac{\ln(2)}{T_{1/2}} \approx \frac{0.693}{T_{1/2}}$$

7.7.2 Nuclear reaction notation

The superscript is the mass number and the subscript is the atomic number. For example, with a helium nucleus of atomic number 2 and mass number 4:



8 Waves

8.1 Universal wave equation

Given the velocity of a wave v , its frequency f and its wavelength λ :

$$v = f\lambda$$

8.2 Basic wave equation

Given a wave with amplitude A , wave number k , angular frequency ω and phase ϕ :

$$y(x, t) = A \sin(kx - \omega t + \phi)$$

The wave number k is related to the wavelength:

$$k = \frac{2\pi}{\lambda}$$

The wave number and angular frequency are related to the velocity of the wave:

$$v = \frac{\omega}{k}$$

8.3 Intensity of a sound

Given a sound source of power P which is acting on an area A :

$$I = \frac{P}{A} = \frac{P}{4\pi r^2}$$

8.3.1 Decibels and intensity measurement

Sound intensity is generally measured in units called decibels. Decibels operate on a logarithmic scale, and the decibel level is referred to with β .

Given a sound of intensity I compared to the reference intensity $I_0 = 10^{-12} \frac{W}{m^2}$:

$$\beta = 10 \log_{10} \left(\frac{I}{I_0} \right)$$

This means that an increase of 10 decibels indicates a tenfold increase of intensity - a whole order of magnitude!

8.4 Simple harmonic motion

Simple harmonic motion occurs when the restoring force is proportional to the displacement.

$$\frac{d^2x}{dt^2} = -\omega^2x$$

8.5 Sound waves in pipes

8.5.1 Open pipes

When a pipe is open at both ends, there will be antinodes at both ends of the pipe. The fundamental wavelength λ_1 is related to the length of the pipe L :

$$\lambda_1 = 2L$$

The fundamental frequency can also be found from this.

$$f_1 = \frac{v}{\lambda} = \frac{v}{2L}$$

Higher harmonics will simply have multiples of the fundamental frequency.

$$f_n = nf_1 = \frac{nv}{2L} \text{ for } n = 1, 2, 3...$$

$$\lambda_n = \frac{\lambda_1}{n} = \frac{2L}{n} \text{ for } n = 1, 2, 3...$$

8.5.2 Pipes closed on one end

A pipe closed on one end will have a node on the closed end and an antinode on the open end.

The fundamental wavelength λ_1 is related to the length of the pipe L :

$$\lambda_1 = 4L$$

The fundamental frequency can also be found from this.

$$f_1 = \frac{v}{\lambda} = \frac{v}{4L}$$

Do note, however, that a pipe with one closed end will actually have no even harmonics: there will only be 1st, 3rd, 5th, 7th harmonics and so on.

$$f_n = nf_1 = \frac{nv}{4L} \text{ for } n = 1, 3, 5...$$

$$\lambda_n = \frac{\lambda_1}{n} = \frac{4L}{n} \text{ for } n = 1, 3, 5...$$

8.6 Waves on a stretched wire

8.6.1 Wave speed

A wave on a stretched wire will travel at a certain speed v , given that it has a tension of F and a linear density μ :

$$v = \sqrt{\frac{F}{\mu}} = \sqrt{\frac{F}{\rho A}}$$

8.6.2 Frequency

The fundamental frequency of the vibrations, given tension F , length L , linear density μ :

$$f_1 = \frac{v}{\lambda} = \frac{1}{2L} \sqrt{\frac{F}{\mu}} = \frac{1}{2L} \sqrt{\frac{F}{\rho A}}$$

The frequency of the N th harmonic is a multiple of the fundamental frequency:

$$f_N = \frac{v}{\lambda_N} = \frac{N}{2L} \sqrt{\frac{F}{\mu}} = \frac{N}{2L} \sqrt{\frac{F}{\rho A}}$$

8.7 Doppler effect

If the source of waves of frequency f is moving with velocity v_s , the observer is moving at v_o , and the speed of sound in air is v :

$$f' = f \frac{v \pm v_o}{v \mp v_s}$$

v_o is positive for motion towards the sound source and negative for motion away from the sound source. v_s is negative for motion towards the observer and positive for motion away from the observer.

9 Fluids

9.1 Jargon

Steady flow (laminar flow) means that the velocity of the fluid at a point is always the same.

Irrotational flow means that the elements of fluid at every single point have no net angular velocity about that point, and implies the absence of eddies and vortices in the flow.

Incompressible fluid flow means that a liquid is incompressible if its density is constant.

9.2 Continuity of flow

Because of conservation of mass (nothing is created or destroyed), a steady flow has to have the same mass of fluid passing all sections in a stream or fluid per unit time.

Given points 1 and 2 in a fluid flow, where the fluid has $\rho_{1,2}$ and $v_{1,2}$, and the pipe has cross-sectional area $A_{1,2}$:

$$\rho_1 A_1 v_1 = \rho_2 A_2 v_2$$

9.3 Bernoulli's equation

For a steady, non-viscous, incompressible flow:

$$\frac{P}{\rho} + gh + \frac{1}{2}v^2 = \text{constant}$$

It can also be stated as:

$$P + \rho gh + \frac{1}{2}\rho v^2 = \text{constant}$$

Bernoulli's equation represents the conservation of energy: the first term represents potential energy per unit mass of the liquid due to pressure, the second term represents potential energy due to gravity (e.g. due to changes in height of a tube), and the third term represents kinetic energy per unit mass of the liquid.

9.4 Torricelli's theorem

If there is a tank filled with liquid and an orifice located on the side of the tank at a depth h below the surface of the liquid, the velocity of emergence of the liquid (also known as the velocity of efflux) is:

$$v = \sqrt{2gh}$$

9.5 Reynold's number and stability

The stability of a fluid flow is represented by the Reynold's number R . For any liquid flowing through a pipe, there is a critical velocity where laminar flow suddenly changes into turbulent flow.

Given a liquid of density ρ and viscosity η flowing at a velocity v through a pipe of diameter d :

$$R = \frac{\rho v d}{\eta}$$

If $R < 2200$, the flow is considered steady. If $R = 2200$, the flow is considered unstable, and if $R > 2200$, the flow is usually considered turbulent.

9.6 Poiseuille's method for determining viscosity

The volume V flowing per second of a liquid of viscosity η through a tube of radius a and length L under pressure P :

$$V = \frac{\pi P a^4}{8 \eta L}$$

9.7 Drag force

The drag force F on a sphere of radius r is dropped into a liquid of viscosity η is proportional to the velocity of that object:

$$F = 6\pi\eta r v$$

9.7.1 Terminal velocity

When a sphere of radius r and density ρ_0 is dropped into an extensive liquid of density ρ and viscosity η , it will eventually approach a terminal velocity v_T due to the drag force and buoyant force:

$$v_T = \frac{2gr^2}{9\eta}(\rho_0 - \rho)$$