NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026


DENER MAKINA · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

CNC PANEL BENDER

FOUR-SIDE BENDING OF BLANKS TO 79 × 49" · 14 GA MILD STEEL, 16 GA STAINLESS, 1/8" ALUMINUM · 15 SERVO AXES





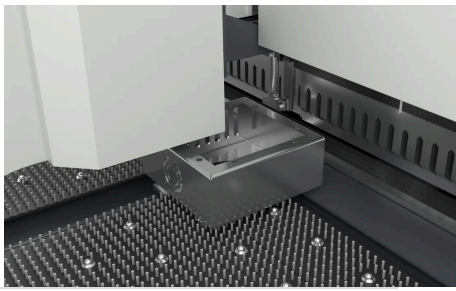

Turkey
MADE IN TURKEY

1
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

DENER PANEL BENDER

CONTENTS

CNC PANEL BENDER

CNC panel bender, 79″ × 49″ blanks, 14 ga mild steel — 15 servo axes DB 2017 · 1 model 04

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR DENER PANEL BENDER

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DENER MAKINA · KAYSERI, TURKEY

BOXES, DOORS AND PANELS IN ONE SETUP — NO TOOLING, NO SKILLED OPERATOR

A panel bender clamps the blank with a blank-holder and a bending blade folds each flange up or down, hems it or forms a box corner in 0.2 s, while a servo manipulator turns the part to the next side: all four sides of a box, door, enclosure or HVAC panel are formed in one setup with no tooling changes. The Dener panel bender takes blanks to 78.7 × 49.2″ (2,000 × 1,250 mm) in 14 ga mild steel, 16 ga stainless and 1/8″ aluminum, with flanges to 6.7″ (11.8″ on request), a 1 mm minimum radius and 0.001 mm positioning on 15 servo axes; 100 % electric, it draws about 2.8 kW on average at 50 dB. Automatic loading and unloading arms turn it into an unattended cell behind a laser.

Dener Makina has built sheet-metal machinery in Kayseri since 1974 and exports to more than 100 countries. NovoTech sells, installs and supports the panel bender in Canada from Mississauga, Ontario, Canada, with a CSA-approved panel, a 1-year warranty and parts stocked in Canada.

DB 2017 · 1 MODEL

CNC PANEL BENDER, 79″ × 49″ BLANKS, 14 GA MILD STEEL — 15 SERVO AXES



MODEL CNC · DENER CNC PANEL BENDER — THREE-QUARTER VIEW



Dener CNC panel bender — front view with the manipulator



Dener CNC panel bender — right view

A panel bender folds all four sides of a blank — up, down, hems, boxes — in one setup, holding the sheet with a blank-holder while the bending blades form each flange in 0.2 s; the manipulator rotates the part between sides. No tooling changes, no operator skill, 1 mm radius bends and ±0.001 mm positioning on 15 servo axes: enclosures, doors, panels, HVAC and appliance parts that would take a press brake a dozen handlings. 100 % electric, 2.8 kW average draw, 50 dB. Automatic loading and unloading arms are available.

STANDARD FEATURES

- ✓ Four-side bending of blanks to 78.7 × 49.2″ (2,000 × 1,250 mm) in one setup; flanges to 6.7″ (11.8″ on request)
- ✓ 15 servo axes, 0.001 mm positioning, 0.2 s per bend, 295 ft/min feeding
- ✓ 14 ga mild steel, 16 ga stainless, 1/8″ aluminum; 1 mm minimum radius
- ✓ High-strength cast frame; servo manipulator with brush table and pressing arm
- ✓ 3D CNC with offline programming, 3D simulation and bending compensation
- ✓ 100 % electric — no hydraulics; about 2.8 kW average consumption, 50 dB
- ✓ CE safety; CSA-approved electrical panel

OPTIONAL EQUIPMENT

- + Automatic loading and unloading arms
- + Longer bending widths; 300 mm bending height
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

CNC PANEL BENDER, 79″ × 49″ BLANKS, 14 GA MILD STEEL — 15 SERVO AXES

CNC PANEL BENDER

1 model · 79″ × 49″ blank · 1/8″ aluminum, 14 ga mild steel, 16 ga stainless

Model	Panel bender DB 2017
Max. bending width	78.7″ (2,000 mm)
Max. blank size L × W	78.7 × 49.2″ (2,000 × 1,250 mm)
Max. bending height	6.7″ (170 mm) · 11.8″ (300 mm) on request
Max. thickness, mild steel 410 N/mm²	14 ga (2.0 mm)
Max. thickness, stainless steel 515 N/mm²	16 ga (1.5 mm)
Max. thickness, aluminum 265 N/mm²	1/8″ (3.0 mm)
Min. bend radius	0.04″ (1 mm)
Min. four-side box, inside	5.5 × 7.5″ (140 × 190 mm)
Min. two-side box, inside	5.5″ (140 mm)
Bending speed	0.2 s per bend
Feeding speed	295 ft/min (90 m/min)
Positioning accuracy	0.001 mm
Servo axes	15
Installed / average power	106 HP (79 kW) installed · about 2.8 kW average
Noise	about 50 dB
Dimensions L × W × H	201 × 104 × 130″ (5,100 × 2,650 × 3,300 mm)
Weight	about 35,000 lb (16 t)

Capacities are Dener's ratings for the stated tensile strengths; longer bending widths and a 300 mm bending height on request.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.