

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access



LTE/5G > UniFi 5G Backup

North America Worldwide



UniFi 5G Backup U5G

Datasheet	In The Box	Marketing Images	Accessories	Installation Guide
-----------	------------	------------------	-------------	--------------------

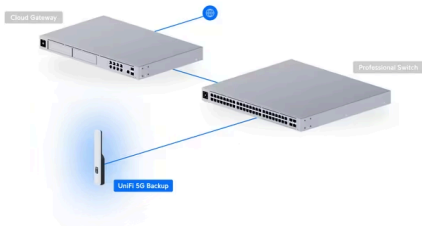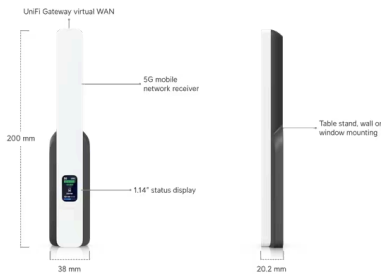

^ Overview

Dimensions

Device: 200 x 38 x 20.2 mm
(7.9 x 1.5 x 0.8")
Table stand: 48.1 x 48 x 55.2 mm
(1.9 x 1.9 x 2.2")

Networking Interface

(1) GbE RJ45 port
5G RedCap and LTE

SIM

(1) Nano-SIM (4FF)
(1) eSIM

Mounting	Desktop stand, wall, window mount (Included)
^ Mechanical	
Weight	Device: 122 g (4.3 oz) Stand: 138 g (4.9 oz) Wall mount: 66 g (2.3 oz)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Galvanized steel, silicone rubber
^ Hardware	
Management	Ethernet
5G NR	
Category	5G RedCap <i>i</i>
Frequency Bands	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41*, n48, n66, n71, n77, n78 <i>i</i>
Max. TX Power	23 dBm
4G LTE	
Frequency Bands	B2, B4, B5, B7, B12, B13, B14, B25, B26, B30, B38, B41,B42, B43, B48, B66, B71 <i>i</i>
Max. TX Power	HPUE power class 2: 26 dBm
Peak Data Speed	
5G SA	Downlink 220 Mbps / Uplink 120 Mbps
4G LTE	Downlink 195 Mbps / Uplink 100 Mbps
Antennas	
Type	(2) Embedded omni-directional cellular antennas
Power Method	PoE <i>i</i>
Display	1.14" status display
Buttons	(1) Factory reset
Ambient Operating Temperature	0 to 40 °C (32 to 104 °F)



NDAA Compliant	✓
Certifications	FCC, IC, PTCRB, GCF, AT&T, T-Mobile
^ Software	
Application Requirements	
UniFi Network	Version 10.4.57 and later
Mobile App	UniFi iOS™ version 10.35.0 and later UniFi Android™ version 10.38.2 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.